

勝特力電材超市-龍山店 886-3-5773766

勝特力電材超市-光復店 886-3-5729570

勝特力電子(上海) 86-21-34970699

勝特力電子(深圳) 86-755-83298787

<http://www.100y.com.tw>

小型門控開關

KA5 全系列

多種高度可選/多種面板厚度選/銅腳



產品使用場景

PRODUCT USAGE SCENARIOS



酒櫃消毒櫃



冰箱櫃門



船舶設備



電器櫃設備



自動化設備




儀器儀表



技术性能参数 SPECIFICATION

电气额定值 (阻性负载) Max. Rating Current & Voltage(Resistive Load)	1A /250V AC
接触电阻 (初始值) Contact Resistance	<50mΩ
绝缘电阻 (常态) Insulation Resistance	>100MΩ
耐压 (常态) Dielectric Strength	1,500V
机械寿命 (次) Mechanical Life(cycles)	50,000
电气寿命 (次) Electronic Life(cycles)	10,000
工作环境温度 Operating temperature	0℃~+55℃
防护等级 IP code	IP40

型号命名规则 HOW TO ORDER

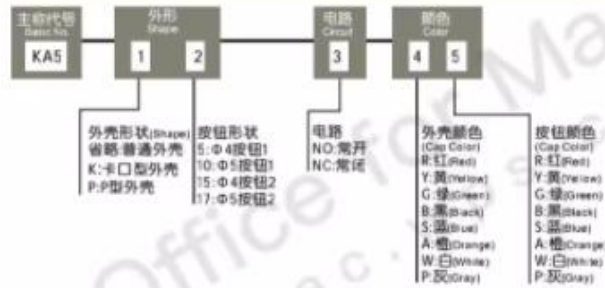

1 : 外形 Shape

代码 Code	例图图解 Diagram	面板开孔尺寸(mm) Fix Size	相配选择 Match the project selection	
			按钮形状	状态
KA5			5/ 15	NO/ NC
KA5-K			10/ 17	NO
KA5-P			5/ 15	NO/ NC

2 : 按钮形状

代码 Code	5	10	15	17
图解 Diagram				
描述 Note	Φ 4按钮1	Φ 5按钮1	Φ 4按钮2	Φ 5按钮2

产品细节解析

PRODUCT DETAILS ANALYTICAL



KA5门控开关按钮

QUALITY ASSURANCE

常开/常闭

电路规格分为常开NO和常闭NC两种。

常开NO：压下去电路通
常闭NC：压下去电路断

SELECT MATERIALS STRICTLY AND PROPERLY IN ACCORDANCE WITH TECHNICAL REQUIREMENTS. NO INFRINGEMENT GUARANTEES PRODUCT TYPE.

QUALITY ASSURANCE

阻燃材料

全新阻燃材料制成
平滑度强做工精细

SELECT MATERIALS STRICTLY AND PROPERLY IN ACCORDANCE WITH TECHNICAL REQUIREMENTS. NO INFRINGEMENT GUARANTEES PRODUCT TYPE.



压杆长度 :5mm
额定电流: 1A



根据面板安装厚度
不同可选不同卡扣形式

KA5- 5-G

QUALITY ASSURANCE

开关灵敏

请结合门缝选择压杆高度

SELECT MATERIALS STRICTLY AND PROPERLY IN ACCORDANCE WITH TECHNICAL REQUIREMENTS. NO INFRINGEMENT GUARANTEES PRODUCT TYPE.