

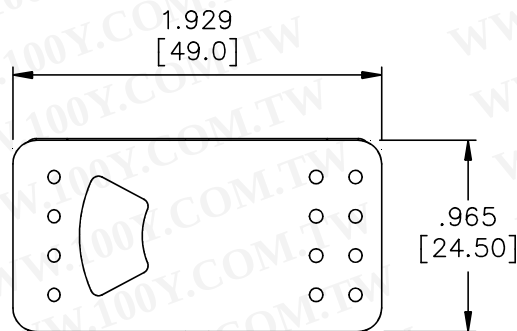
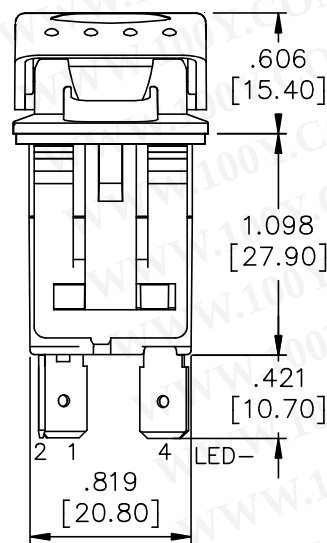


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

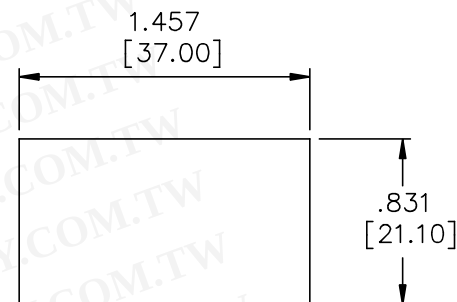

POS. 1
Green LED

POS. 2

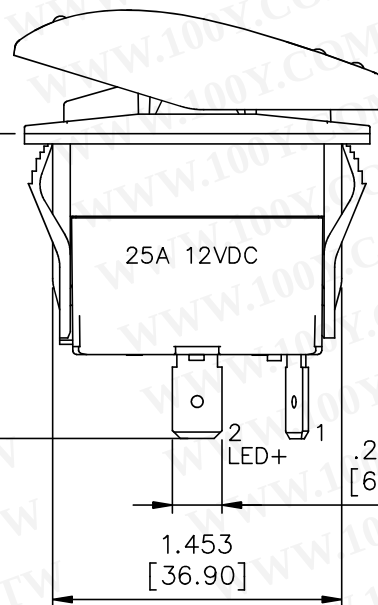

Panel Cutout

MODEL NO.	SWITCH POSITION		
	POS. 1	POS. 2	
2P-9	(ON)	NONE	OFF
Term. Comm.	2-1	OPEN	OPEN

- SPECIFICATIONS:
- MOVABLE CONTACT: Silver alloy
 - TERMINALS: Copper alloy
 - RATING: 25A 12VDC, 20A 125VAC, 12A 250VAC
 - CONTACT RESISTANCE: 20m-ohms max. initial
 - INSULATION RESISTANCE: 100M-ohms min. @ 500VDC
 - DIELECTRIC STRENGTH: 1,500V RMS @ sea level
 - ELECTRICAL LIFE: 30,000 make and break cycles at full load
 - OPERATING TEMPERATURE: -30°C to +85°C
 - IP67 Front Panel Protection Class
 - SOLDERING TEMPERATURE: 350°C for 3sec. Max.
(No pressure to be applied on terminals)

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS COMPONENTS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS COMPONENTS LTD.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: $\pm 1.0^\circ$

DIMENSIONS	TOLERANCE
0.00 TO 10.00mm	± 0.20 mm
10.01 TO 20.00mm	± 0.25 mm
20.01 TO 30.00mm	± 0.30 mm
30.01 ↑	± 0.40 mm

MATERIAL

USED 用途	MR	APPD. 審核	Amy 2013/11/29
FINISH 處理		CHKD. 校對	Amy 2013/11/29
SCALE 比例	1/1	UNIT 單位	in(mm)
		DR. 製圖	John 2013/11/29
TITLE 名稱	SEALED ROCKER SWITCH		
DWG NO. 圖號	MR-2P9-S04-2-000-G-12V-M3		SIZE 圖紙 A4
FILE NAME 檔案名稱	MR-2P9-S04-x-M3	SHEET 張數	1/1
		REV. 更改	1