




APPROVED

SPECIFICATION



Contact Rating :10A 125/250VAC TV-8()TV-10()
 :10A/142A 250VAC μ ~T85()
 Initial Contact Resistance:50 milliohms max.
 Insulation Resistance :1000 megohms min. 500VDC

Withstand Voltage :2,000 VAC-1 minute
 Life Expectancy :10,000 Cycles
 Operating Travel :lock travel 2.4±0.5mm
 full travel 4.0±0.5mm
 Operating Force :500±200gf

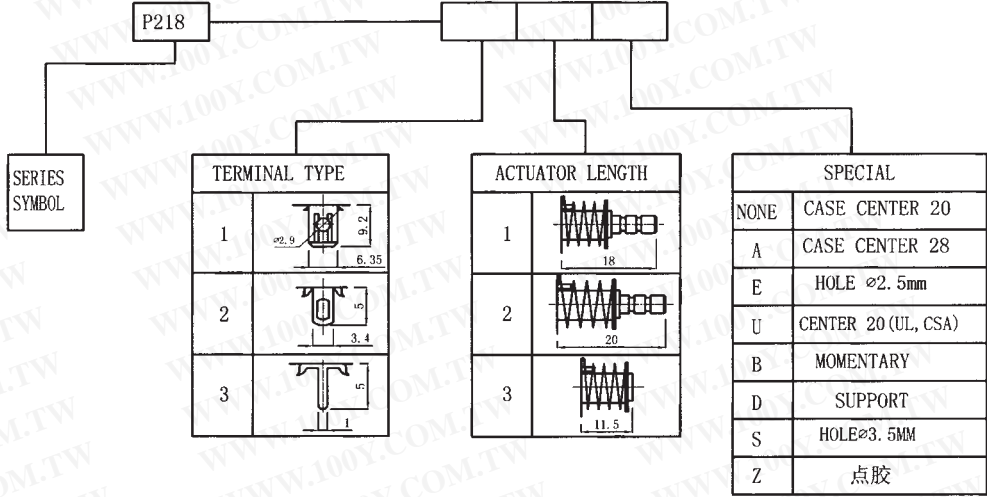

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

P218-11

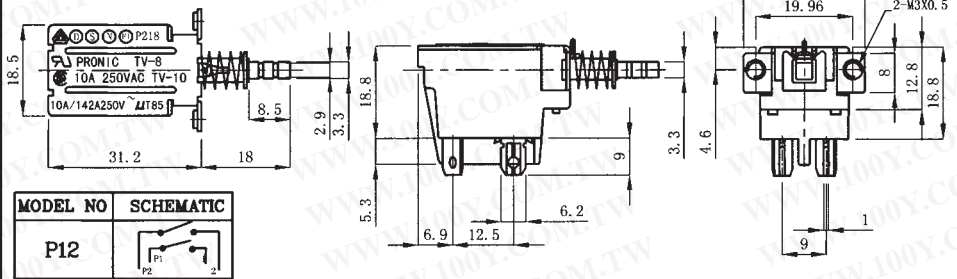

P218-21

