

RATING :

10A 125VAC

6A 250VAC u T105 1E4



RL3-4-6110-A-BB-2-P19-F


RoHS

FUNCTION	
A	4P ON-OFF
B	3P ILLUMINATED
C	4P ILLUMINATED

Color Housing/Cap	
B	Black
W	White
R	Red
O	Orange
G	Green
GE	Grey

Cap Printing	
0	None
1	
2	
3	
8	
15	
29	

Terminal	
(P8)	
(P18)	

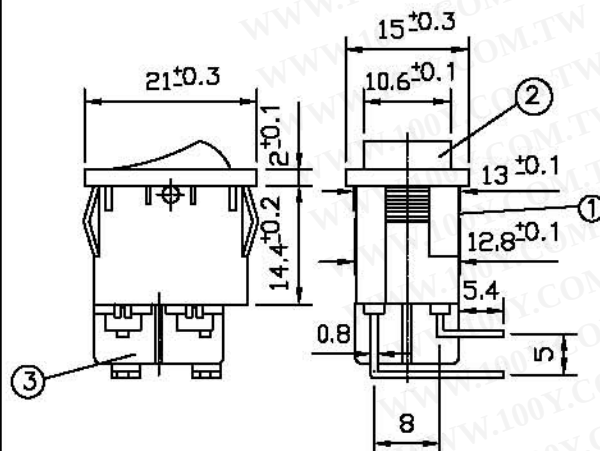

SPECIFICATION :



1. RATING : 10A 125VAC
6A 250VAC
2. CONTACT RESISTANCE : 30 m OHMS MAX.
3. INSULATION RESISTANCE : DC 500V 100 m OHMS Min.
4. WITHSTAND VOLTAGE : AC 1500V 1 Minute.
5. OPERATION FORCE : 0.3-0.8 KG.
6. OPERATION LIFE : 10,000 Cycles At Full Load.

Panel hole size

Panel thickness	X
0.75-1.25	19.2
1.25-2.0	19.4
2.0-3.0	19.6

TOERLANCE: ±0.2

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

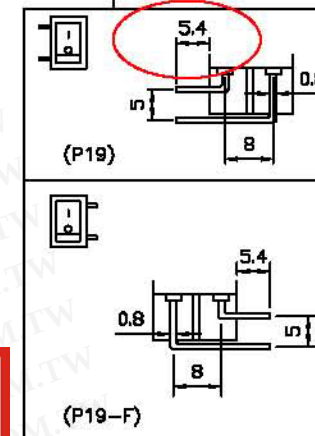

3	TERMINAL		BSP1-H/2		
2	ROCKER	1	A : NYLON 66	B : PC	
1	HOUSING	1	NYLON 66		
NO.	DESCRIPTION	QTY	MATERIAL		FINISH
DRAW BY	CHUN	031611	SCALE	1 : 1	PROJ
DEGN BY	YANG				
APPD BY	RAY				
		UNIT	MM		
ITEM NO.					RL3-4-6110-P19-F
TITLE					ROCKER SWITCH
DWG NO.					RL3-4-6110-P19-F-CN05-A1

DATE	DRAWG BY	REVISED	△
------	----------	---------	---