

型號 MODEL NO.


SK12E14G

按柄長度Knob Length(L) (mm)


General specifications

Circuit : ON-ON(1P2T)  
 Rating : D.C. 50V 0.5A  
 Contact R.[max] : D.C. 5V 1A 30mΩ  
 Insulation R.[min] : D.C. 500V 100MΩ  
 Withstand VOL. : A.C. 500V 1 minute  
 Timing : Non Shorting  
 Operating force : 300±100g  
 Life cycle[max] : 10,000 CYCLES

SCHEMATIC



P.C.B. HOLE DETAIL

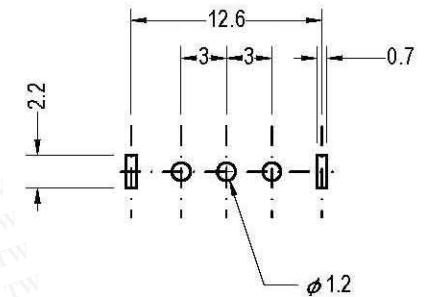

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

比例 SCALE 2:1

單位 DIMENSION mm

DO NOT SCALE DRAWING  
 TOLERANCES UNLESS OTHERWISE

UP TO 10 ±0.3  
 ABOVE 10 TO 100 ±0.5  
 ABOVE 100 ±0.8  
 ANGULAR DIMENSIONS ±5°

品名 TITLE

SLIDE SWITCH

型號 MODEL

SK12E14 SERIES

繪圖  
DRAWN

MKL 2006/05/26

核准  
APPROVED

版次  
REVISION

A

日期  
DATE

2006/05/26