

# Control and signaling units Ø 22

Harmony<sup>®</sup> XB4 metal

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Catalog

September 2014



**Schneider**  
Electric

# How can you fit a 6000-page catalog in your pocket?


Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



## Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

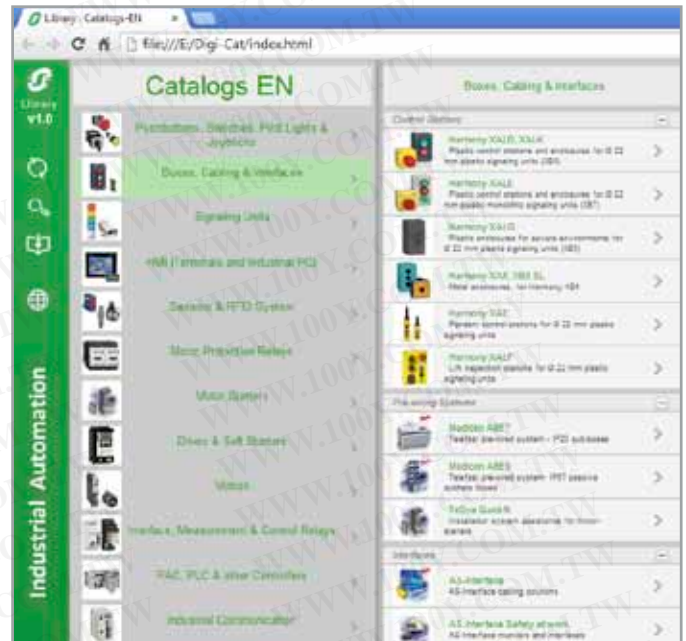

Contact your local representative to get your own Digi-Cat



## e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code

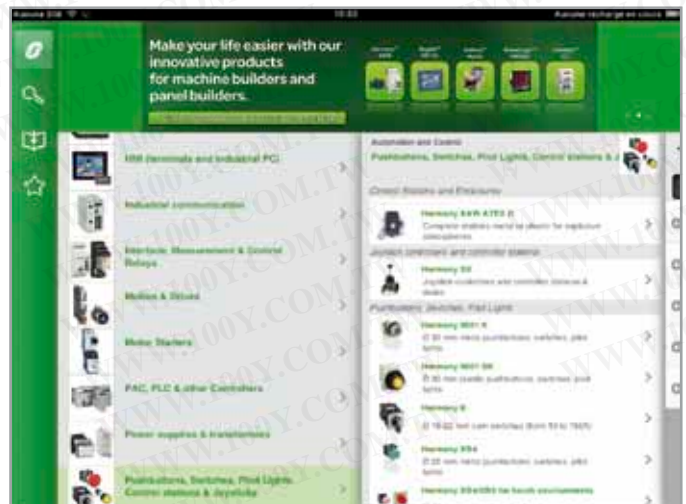

# General contents

## Harmony® XB4 metal

### Selection guide ..... page 2

#### ■ General

- Presentation ..... page 4
- Description ..... page 5

#### ■ Installation

- Contact mounting - Contact sequence ..... page 12

#### ■ References

- Spring return, pushbuttons ..... page 14
- Illuminated pushbuttons, spring return
  - With integral LED ..... page 17
  - With BA 9s base fitting ..... page 19
- Multiple-headed pushbuttons, spring return ..... page 20
- Mushroom head pushbuttons, spring return type or latching type ..... page 22
- Emergency stop and Emergency switching off functions ..... page 24
- Pushbuttons and Illuminated pushbuttons, push-push ..... page 26
- Selector switches
  - With standard handle ..... page 28
  - With long handle and padlockable long handle ..... page 29
  - Key switches ..... page 30
  - With knurled knob ..... page 31
  - Illuminated, with standard handle and integral LED ..... page 32
- Pilot lights
  - With integral LED ..... page 34
  - With BA 9s base fitting ..... page 35
- Specific functions
  - Manual overload reset pushbuttons ..... page 36
  - Heads for potentiometer, hour counters, annunciators and fuse carrier ..... page 36
  - Joystick controllers with screw clamp terminal connections ..... page 37
- Contact and illuminated functions (blocks & bodies)
  - With screw clamp terminal connections ..... page 38
  - With spring clamp terminal connections ..... page 40
  - For printed circuit board ..... page 41
  - With Faston or plug-in connectors ..... page 42
- Body/contact assemblies and light blocks
  - With integral LED ..... page 44
  - With BA 9s base fitting ..... page 48
- Accessories
  - For heads ..... page 51
  - For pushbuttons ..... page 59
  - Legends and legend holders ..... page 52
- Product reference index ..... page 62

Type of products		Pilot lights	Pushbuttons, selector switches and pilot lights			Biometric switches	Wireless and batteryless pushbuttons	Pushbuttons, selector switches and pilot lights	Joystick controllers	Pushbuttons, selector switches and pilot lights	Cam switches		
													
<b>Description of range</b>		<ul style="list-style-type: none"> <li>LED pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Multiple-headed pushbuttons</li> <li>Emergency Stop pushbuttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> </ul>			<ul style="list-style-type: none"> <li>Fingerprint readers 24V ---</li> <li>Stand-alone biometric switches</li> <li>Stand-alone USB biometric switches</li> <li>USB biometric switches dedicated to Schneider HMI (1)</li> </ul>	<ul style="list-style-type: none"> <li>Wireless and batteryless pushbuttons and rope pull switch</li> <li>Configurable receivers</li> <li>Access point</li> <li>Relay-antenna</li> <li>Mobile handy box or plastic boxes for wall mounting</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Emergency Stop and Emergency switching off pushbuttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>2 or 4 direction</li> <li>Stay put or spring return</li> </ul>	<ul style="list-style-type: none"> <li>Pushbuttons</li> <li>Emergency Stop buttons</li> <li>Selector switches and key switches</li> <li>Illuminated pushbuttons</li> <li>Pilot lights</li> </ul>	<ul style="list-style-type: none"> <li>Switches</li> <li>Stepping switches</li> <li>Reversing and changeover switches</li> <li>Ammeter switches</li> <li>Voltmeter switches</li> <li>Reversing switches</li> <li>Star-delta and reversing star-delta switches</li> <li>Pole change switches</li> </ul>		
<b>Features</b>	Products	Monolithic, compact, low consumption	Complete units or sub-assemblies (body + head)			Monolithic	Ready-to-use packs (2) and "components" range	Monolithic	Complete units or sub-assemblies (body + head with lever)	Complete units or sub-assemblies (body + head)	Complete units or sub-assemblies (body + front panel + head)		
	Bezel	Double insulated	Double insulated (3)	Metal, chromium plated or black	Double insulated	Double insulated, dark grey	Metal, chromium plated or double insulated, black	Double insulated, dark grey (or white for pilot lights)	Metal, chromium plated	Double insulated, black	Metal, chromium plated or double insulated, black		
	Shape of head	Circular	Circular, square or rectangular	Circular	Circular or square	–	Transmitter with circular head	Circular	Circular	Hexagonal	Square		
<b>Drilling or cut-out for fixing</b>		Ø 8 mm and Ø 12 mm/0.315 in. and 0.472 in.	Ø 16 mm/0.630 in.	Ø 22 mm/0.866 in.			Ø 22 mm/0.866 in.			Ø 30 mm/1.181 in.	Ø 16 or Ø 22 mm/0.630 or 0.866 in.: series K10 Ø 22 mm/0.866 in. and multifixing: series K1/K2 4 holes, 48 or 68 centres: series K30...K150		
<b>Degree of protection</b>	Conforming to IEC 60529	IP 40 IP 65 with seal	IP 65	IP 66 IP 69K (Selector switches and key switches, multiple-headed pushbuttons and Emergency Stop pushbuttons with bellows)	IP 65 (control button)		IP 65	IP 65 (control buttons and pilot lights) IP 54 (Emergency switching off pushbuttons)	IP 65	IP 66	IP 65	IP 66	IP 65: series K10 IP 40, IP 65 with seal: series K1/K2 IP 40: series K30...K150
	Conforming to UL 508 and CSA C22-2 N° 14	–	Enclosure type 4, 4X and 13			Enclosure type 12	Enclosure type 12	Enclosure type 3 (pushbuttons and Emergency stop) and 4 (pilot lights)	Enclosure type 4, 4X and 13	Enclosure type 4 and 13 (9001K) Enclosure type 4, 4X, 13 (9001SK)	–	–	–
<b>Cabling</b>		Tags for 2.8 x 0.5 mm/0.110 x 0.020 in. connectors or threaded connector	Faston connectors Solder pins for printed circuit boards (3) Fast connector socket (4)	Spring clamp terminal connections Screw clamp terminal connections Faston connectors Connector With adaptor for printed circuit board		Cable or connectors	Wireless (transmitter) Through cable (receiver)	Screw and captive clamp terminal connections Faston clip connections (pilot lights)	Screw and captive clamp terminal connections				
<b>Mounting</b>		Panel thickness	1...8 mm/0.039...0.315 in.	1...6 mm/0.039...0.236 in.			1...6 mm/0.039...0.236 in.					0.5...6 mm/0.020...0.236 in. (depending on model)	
<b>Type references</b>		XVLA	XB6, XB6E	<b>XB4</b>	XB5	XB5S	XB5R, XB4R	XB7	XD4PA	XD2GA	XD5PA	9001K, 9001SK	K10, K1, K2, K30, K50, K63, K115, K150

(1) Compatible with Magelis iPC, STU, OT, GXO, GT (except GT1000 series), GK, GH, and GTO models.  
 (2) Wireless and batteryless pushbutton and receiver ready-paired at the factory.

(3) For Harmony XB6 only.  
 (4) For Harmony XB6E only.

# Control and signaling units Ø 22

## Harmony XB4, metal

### Pushbuttons, switches and pilot lights

#### Presentation

The Harmony® XB4 range of metal control and signaling units combines simplicity of installation, flexibility and robustness. It meets the requirements of the majority of industrial applications.

- This range includes:
  - Pushbuttons and switches designed for Start/Stop control of machines and installations, adjustment and parametering (contact functions): Pushbuttons, selector/key switches, Emergency stop or Emergency switching off functions, multiple-headed pushbuttons
  - Pilot lights designed for visual signaling (signaling functions)
  - Illuminated pushbuttons designed for control and signaling (contact functions + signaling functions)
- These products are shown on the following pages in two forms:
  - Complete units with chromium plated metal bezel
  - Sub-assemblies for user assembly (body sub-assemblies and head sub-assemblies with chromium plated or black metal bezel)
- The pushbutton and switch control offer (illuminated and non-illuminated) is both broad and comprehensive:
  - Flush, projecting, recessed, booted, spring return, push-pull, marked or unmarked pushbuttons
  - Emergency stop trigger action and mechanically latching pushbuttons (conforming to standards EN/IEC 60204-1 and EN/ISO 13850)
  - Emergency switching off mechanically latching pushbuttons (conforming to standard IEC 60364-5-53)
  - Selector switches with standard, long handle or knurled knob, key switches
  - Controllers
  - Wide choice of legends and legend holders
  - Wide choice of head colors
  - Wide choice of accessories and spare parts
- The pilot light signaling offer includes pilot lights with integral LED and pilot lights for BA 9s base fitting bulbs. The two types of pilot lights are for direct supply or via integral transformer.
- Innovative complementary offers are also available:
  - Multiple-headed pushbuttons
  - Control and signaling units for severe applications
  - Wireless and batteryless pushbuttons
  - Biometric switches (see the Harmony XB5 offer)

#### Installation

- Harmony XB4 products are both simple and quick to install:
  - Mounting by single installer (self-maintaining of the head in its cut-out)
  - Clip-together component system (head, body, contact blocks and LED)
  - Fixing by a single locking screw
  - Anti-loosening system for screw clamp terminals of contact blocks.
- Various types of connection are available: Screw clamp, connector, Faston connector, spring terminal or for printed circuit board.

#### Environment

- The performance features of the Harmony XB4 range meet the most demanding international standards and approvals:
  - EN/IEC 60947-1, EN/IEC 60947-5-1, EN/IEC 60947-5-4 and EN/IEC 60947-5-5
  - UL 508, CSA C22-2 n° 14, GB 14048.5
  - International certifications: UL, CSA, CCC, GOST
  - Marine certifications: BV, RINA, LROS, DNV, GL
- The range includes products for use in difficult industrial environments, due to:
  - Their high degree of protection for harsh environments (IP 66 / IP 69K)
  - Their resistance to high pressure cleaning
  - Their "all climates" TH compatibility
  - A wide choice of contact blocks with various breaking capacities (low, standard or high power switching)

For more technical information, please refer to our website [www.schneider-electric.com](http://www.schneider-electric.com).

# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights


**Description**

The Ø 22 mm/0.866 in. range of metal control and signaling units comprises:

Complete units XB4B, with chromium plated metal bezel




Pushbuttons and switches




Pilot lights

Sub-assemblies ZB4B, with chromium plated or black metal bezel




Pushbuttons and switches:  
body + head  
sub-assemblies



Pilot lights:  
body + head  
sub-assemblies

Component parts and accessories, ZB

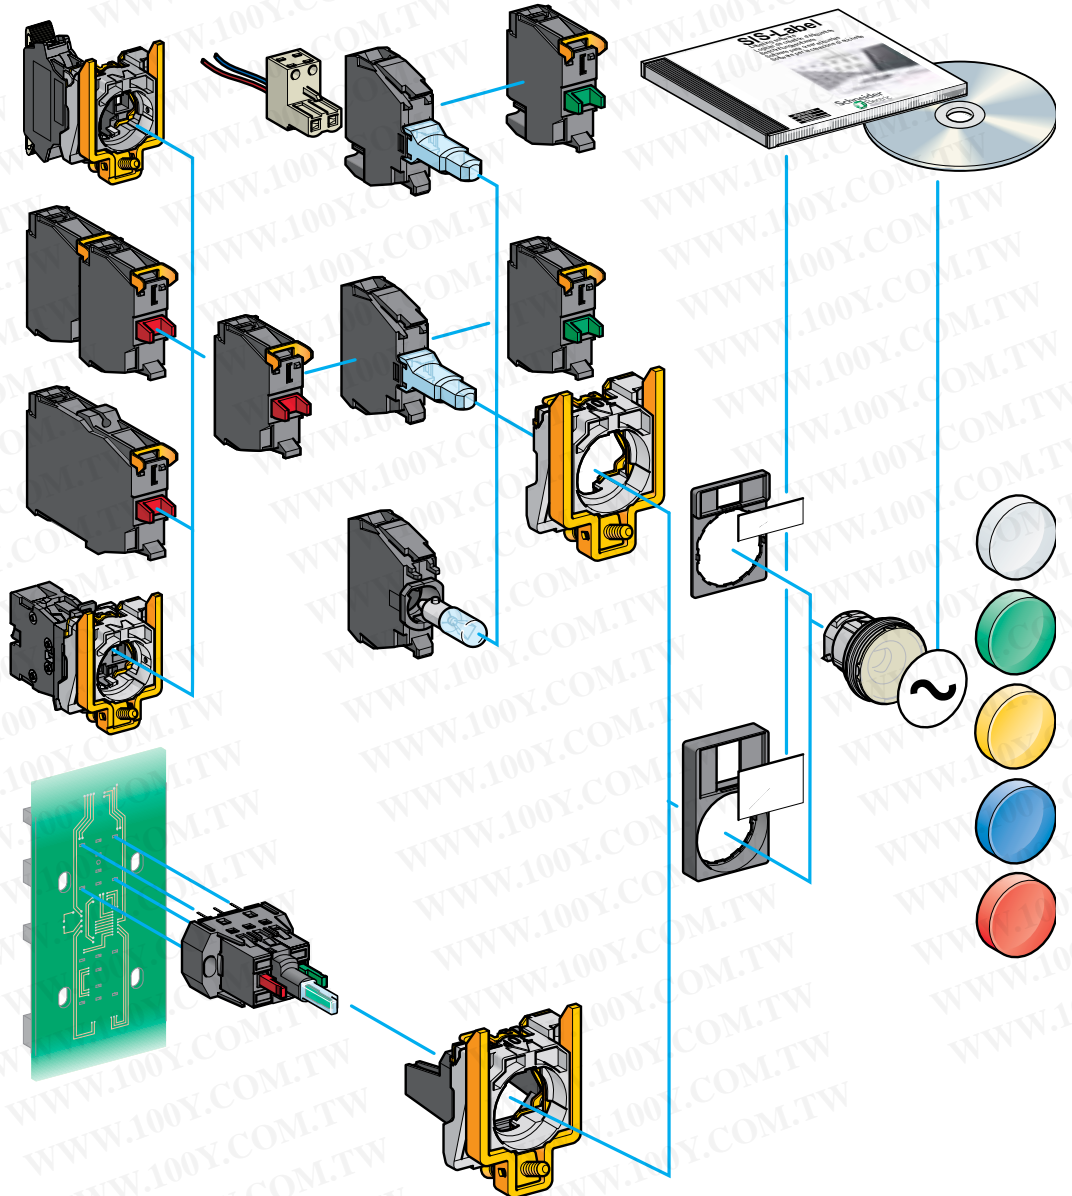

# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights:  
complete units, XB4B


## Complete units

## Contact functions


Pushbuttons, spring return, with chromium plated metal bezel




Flush push, unmarked  
XB4BA●1/BA42  
see page 14




Flush push, with marking  
XB4BA3311  
see page 16




Projecting push, with marking  
XB4BL4322  
see page 16



Booted flush push  
XB4BP●1/BP42  
see page 15




Projecting push, unmarked  
XB4BL42  
see page 14




Mushroom head  
XB4BC21  
see page 22

Ø 40 mm/  
1.57 in.

Multiple-headed pushbuttons, spring return, with chromium plated metal bezel




Double-headed  
XB4BL73415  
see page 20




Triple-headed  
XB4BA731327/XB4BA711237  
see page 21


Emergency Stop or Emergency switching off mushroom head pushbuttons, Ø 40 mm/1.57 in., with chromium plated metal bezel



Ø 40 mm/  
1.57 in.



Ø 40 mm/  
1.57 in.



Ø 40 mm/  
1.57 in.


Emergency stop trigger action and mechanical latching

Push-pull (EN/ISO 13850)  
XB4BT845  
see page 24


Turn to release (EN/ISO 13850)  
XB4BS844●  
see page 24

Key release (EN/ISO 13850)  
XB4BS9445  
see page 24


Selector switches and key switches, with chromium plated metal bezel



Standard handle, black  
XB4BD●●  
see page 28



Long handle, black  
XB4BJ●●  
see page 29



Key switch  
XB4BG●●  
see page 30

# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights:  
complete units, XB4B

## Complete units


## Signaling functions

### Pilot lights




Integral LED

**XB4BV6●/BVG●/BVM●**  
see page 34



For bulb with BA 9s base fitting  
Direct supply

**XB4BV3●**  
see page 35




Via integral transformer with secondary

**XB4BV3●/BV4●**  
see page 35


## Combined functions (contact and signaling)

### Illuminated pushbuttons, spring return, flush push, chromium plated metal bezel




Integral LED

**XB4BW3●B5/BW3●G5/BW3●M5**  
see page 17



For bulb with BA 9s base fitting  
Direct supply


**XB4BW3●65**  
see page 19



Via integral transformer

**XB4BW3●35/BW3●45**  
see page 19


### Double-headed pushbuttons + pilot light block, spring return, chromium plated metal bezel



Integral LED

**XB4BW73731●5**  
see page 20

### Illuminated selector switches with standard handle, chromium plated metal bezel



Integral LED

**XB4BK12●●5, XB4BK13●●5**  
see page 32

# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights:  
sub-assemblies, ZB4B


## Non illuminated units for user assembly

For pushbuttons, spring return, unmarked


### Body sub-assemblies



Screw clamp terminals  
ZB4BZ10/BZ141  
see page 38



Faston  
ZB4BZ10/3  
see page 42



Spring clamp terminals  
ZBE10/5  
ZB4BZ10/5  
see page 40


For pushbuttons, spring return, with marking

For multiple-headed pushbuttons, spring return

For "push-push to release" pushbuttons

## Contact functions

### Head sub-assemblies, chromium plated or black metal bezel

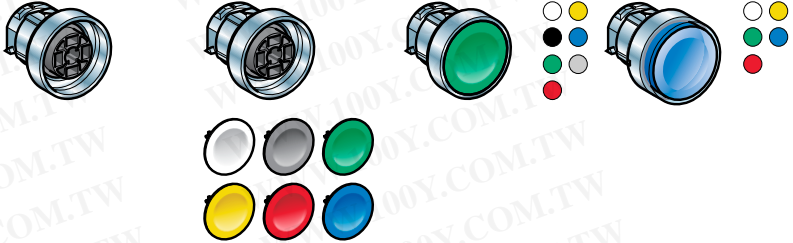


Flush push without cap  
ZB4BA0  
see page 14

Flush push with set of 6 caps  
ZB4BA9  
see page 14

Flush push  
ZB4BA●  
see page 14

Flush push for insertion of legend  
ZB4BA●8  
see page 14




Projecting push  
ZB4BL●  
see page 14



Recessed push  
ZB4BA●6  
see page 15



Booted flush/projecting push  
ZB4BP●/BP●S  
see page 15




Booted flush push for insertion of legend  
ZB4BP●8  
see page 15



Flush push  
ZB4BA●3●/BA●4●  
ZB4BA334/335  
see page 16




Projecting push  
ZB4BL●3●  
see page 16



Double-headed pushbuttons  
ZB4BA7●●●  
ZB4BA79  
ZB4BL734●  
see page 20



Triple-headed pushbuttons  
ZB4BA7313●  
ZB4BA711●●  
ZB4BA72124  
ZB4BA791  
see page 21



Flush push  
ZB4BH0●  
see page 26



Projecting push  
ZB4BH●  
see page 26



# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights:  
sub-assemblies, ZB4B


## Pilot lights for user assembly

## Signaling functions

### Body sub-assemblies with integral LED



Connection: screw clamp terminals  
**ZB4BVJ●/BVB●/BVG●/BVM●**  
see page 46



Connection: plug-in connector  
**ZB4BVB●4/BVG●4/BVM●4**  
please consult our Customer Care Centre

### Head sub-assemblies




With lens fitted  
**ZB4BV0●3**  
see page 34




With 5 separate lenses, not fitted  
**ZB4BV003**  
see page 34

### Body sub-assemblies for BA 9s bulb



Direct supply  
Connection: screw clamp terminals  
**ZB4BV6**  
see page 49



Via integral transformer  
Connection: screw clamp terminals  
**ZB4BV●D●**  
see page 49

### Head sub-assemblies



With lens fitted  
**ZB4BV0●, ZB4BV0●S**  
see page 35

# Control and signaling units Ø 22


Harmony XB4, metal

Pushbuttons, switches and pilot lights:  
sub-assemblies, ZB4B


## Illuminated pushbuttons for user assembly

For illuminated pushbuttons, spring return

### Body sub-assemblies with integral LED



Screw clamp terminals  
ZB4BW0B●●/BW0G●●/  
BW0M●●  
see page 44



Plug-in connector  
ZB4BW0B●●4  
please consult our  
Customer Care Centre

For illuminated double-headed pushbuttons, spring return



Spring clamp terminals  
ZBV●●●  
see page 40

For illuminated "push-push to release" pushbuttons and illuminated selector switches with standard handle

For illuminated mushroom head pushbuttons

### Body sub-assemblies for BA 9s bulb




Direct supply or via  
integral transformer  
Screw clamp terminals  
ZB4BW0●●●  
see page 48


For illuminated pushbuttons, spring return

## Combined functions (contact and signaling)

### Head sub-assemblies, chromium plated or black metal bezel




Flush push ZB4BW3●3 see page 18	Flush push with illuminated ring ZB4BW9●3 see page 18	Flush push for insertion of legend ZB4BA●8 see page 18
---------------------------------------	---	--

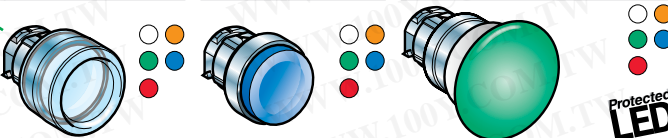


Booted flush push ZB4BW5●3 see page 18	Projecting push ZB4BW1●3, ZB4BW1●3S see page 18	Mushroom head, spring return ZB4BW4●3 see page 22
--	--	---




Double-headed (flush/flush push) + central pilot light  
Double-headed (flush/projecting push) + central pilot light  
ZB4BW7A17●● / ZB4BW7A374● / ZB4BW7A9, see page 20  
ZB4BW7L374●, see page 20




Flush or projecting "push-push to release"  
ZB4BH0●3/BH●3  
see page 27



Selector switches with standard handle  
ZB4BK1●●3  
see page 33



Mushroom head, latching  
ZB4BW6●3  
see page 23



Emergency switching off,  
mechanical latching, push-pull  
ZB4BW643  
see page 24

### Head sub-assemblies, chromium plated or black metal bezel




Flush push ZB4BW3●, ZB4BW3●S see page 19	Projecting push ZB4BW1●, ZB4BW1●S see page 19
---	--

# Control and signaling units Ø 22

Harmony XB4 metal  
Contact mounting - Contact sequence


## Maximum recommended configurations guaranteeing achievement of catalog characteristics

Unit type (complete units XB4B, heads ZB4B)	Pushbuttons, spring return XB4BA●, ZB4BA●, (except ZB4BA●8) XB4BC●, ZB4BC●, XB4BL●, ZB4BL●, XB4BP●, ZB4BP●, ZB4BR● Triple-headed pushbuttons XB4BA731327, XB4BA711137, ZB4BA7313●, ZB4BA7111●, ZB4BA72124, ZB4BA791	Double-headed pushbuttons XB4BL73415, ZB4BA712●, ZB4B●734●, ZB4BA79	Illuminated pushbuttons, spring return XB4BW●, ZB4BW●, ZB4BA●8 Double-headed pushbuttons + pilot light block XB4BW73731●5, ZB4BW7A17●●, ZB4BW7●374●, ZB4BW7A9	
Solution using single contacts				
Solution using single and double contacts				
Maximum recommended configurations	Single contacts Double contacts + single contacts Light block	9 3 + 3 -	6 2 + 2 -	6 2 + 2 1

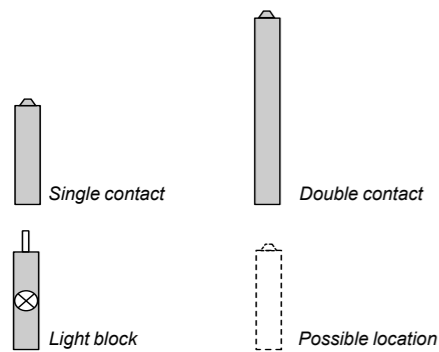

## Possible configurations for high power switching contacts (1) (2)

High power switching contact blocks with screw clamp terminal connections:  
ZBE501, ZBE502, ZBE503, ZBE504 and ZBE505  
High power switching contact blocks with connection by Faston connectors:  
ZBE5013, ZBE5023, ZBE5033, ZBE5043 and ZBE5053

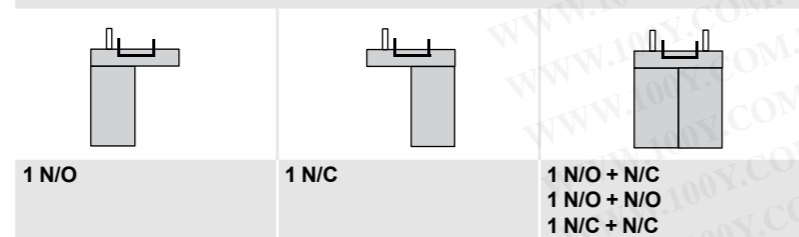

(1) The configurations are not upgradable and cannot be combined with other types of contact and signaling functions.  
(2) High power switching contacts are not compatible with Harmony triple-headed pushbuttons.



Emergency stop or Emergency switching off XB4BT●, ZB4BT●, XB4BS●, ZB4BS●	Selector switches ■ Standard handle XB4BD●, ZB4BD●, ■ Long handle XB4BJ●, ZB4BJ●, ■ Knurled knob ZB4BD●9, ■ Key switch XB4BG●, ZB4BG●	Illuminated selector switches, standard handle XB4BK●, ZB4BK●	Toggle switches ZB4BD●8	Pushbuttons, push-push ZB4BH●	Illuminated pushbuttons, push-push ZB4BH●3
4 2 + 0 -	4 1 + 2 -	5 2 + 1 -	4 1 + 2 -	6 2 + 0 -	4 2 + 0 1


## Sequence of contacts fitted to selector switch bodies






Unit type	Selector switches	
	2-position	3-position
Push	Position Top  Position Bottom 	Position Top  Position Bottom 
Location	L C R	L C R
State	0 0 0	1 1 1
Contacts	N/O N/C	N/O N/C



L left, C centre, R right  
□ open, ■ closed

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

Pushbuttons with flush push (1)						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
						
		N/O	N/C			

Complete units						
	Flush	1	-	White	<b>XB4BA11</b> (ZB4BZ101 + ZB4BA1)	0.080/0.176
				Black	<b>XB4BA21</b> (ZB4BZ101 + ZB4BA2)	0.080/0.176
				Green	<b>XB4BA31</b> (ZB4BZ101 + ZB4BA3)	0.080/0.176
				Yellow	<b>XB4BA51</b> (ZB4BZ101 + ZB4BA5)	0.080/0.176
				Blue	<b>XB4BA61</b> (ZB4BZ101 + ZB4BA6)	0.080/0.176
				Red	<b>XB4BA42</b> (ZB4BZ102 + ZB4BA4)	0.080/0.176
		-	1			

Heads only						
	Without cap (2)			-	<b>ZB4BA0</b>	0.028/0.062
	Flush, with set of 6 colored caps			6 colors (3)	<b>ZB4BA9</b>	0.038/0.084
	Flush			White	<b>ZB4BA1</b>	0.029/0.064
				Black	<b>ZB4BA2</b>	0.029/0.064
				Green	<b>ZB4BA3</b>	0.029/0.064
				Red	<b>ZB4BA4</b>	0.029/0.064
				Yellow	<b>ZB4BA5</b>	0.029/0.064
				Blue	<b>ZB4BA6</b>	0.029/0.064
				Gray	<b>ZB4BA8</b>	0.029/0.064
	Flush with transparent cap for insertion of legend (4)			White	<b>ZB4BA18</b>	0.028/0.062
				Green	<b>ZB4BA38</b>	0.028/0.062
				Red	<b>ZB4BA48</b>	0.028/0.062
				Yellow	<b>ZB4BA58</b>	0.028/0.062
				Blue	<b>ZB4BA68</b>	0.028/0.062
	Flush (high bezel)			White	<b>ZB4BA14</b>	0.034/0.075
				Black	<b>ZB4BA24</b>	0.034/0.075
				Green	<b>ZB4BA34</b>	0.034/0.075
				Red	<b>ZB4BA44</b>	0.034/0.075
				Yellow	<b>ZB4BA54</b>	0.034/0.075
				Blue	<b>ZB4BA64</b>	0.034/0.075

Pushbuttons with projecting push (1)						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
						
		N/O	N/C			

Complete units						
	Projecting	-	1	Red	<b>XB4BL42</b> (ZB4BZ102 + ZB4BL4)	0.081/0.179

Heads only						
	Projecting			White	<b>ZB4BL1</b>	0.030/0.066
				Black	<b>ZB4BL2</b>	0.030/0.066
				Green	<b>ZB4BL3</b>	0.030/0.066
				Red	<b>ZB4BL4</b>	0.030/0.066
				Yellow	<b>ZB4BL5</b>	0.030/0.066
				Blue	<b>ZB4BL6</b>	0.030/0.066

### Heads with black metal bezel

To order, add a figure 7 to the references listed from above.

Example: **ZB4BA0** becomes **ZB4BA07**.

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Colored cap to be ordered separately: see page 50.

(3) Head supplied with 6 different colored caps (White, Black, Green, Red, Yellow, Blue) not fitted.

(4) For legend ordering information, see page 57.

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

### Pushbuttons with recessed push (1)

#### High guard




Shape of head	Type of push	Color	Reference	Weight kg/lb
<b>Heads only</b>				
	Recessed (high guard)	White	<b>ZB4BA16</b>	0.034/0.075
		Black	<b>ZB4BA26</b>	0.034/0.075
		Green	<b>ZB4BA36</b>	0.034/0.075
		Red	<b>ZB4BA46</b>	0.034/0.075
		Yellow	<b>ZB4BA56</b>	0.034/0.075
		Blue	<b>ZB4BA66</b>	0.034/0.075



ZB4BA36

### Pushbuttons with silicone booted head for severe environments (1)



#### Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of push	Type of contact		Color of push	Reference	Weight kg/lb
						
		N/O	N/C			
<b>Complete units</b>						
	Booted, clear silicone (color of push unobscured)	1	-	Black	<b>XB4BP21</b> (ZB4BZ101 + ZB4BP2)	0.082/0.181
				Green	<b>XB4BP31</b> (ZB4BZ101 + ZB4BP3)	0.082/0.181
				Yellow	<b>XB4BP51</b> (ZB4BZ101 + ZB4BP5)	0.082/0.181
				Blue	<b>XB4BP61</b> (ZB4BZ101 + ZB4BP6)	0.082/0.181
				Red	<b>XB4BP42</b> (ZB4BZ102 + ZB4BP4)	0.082/0.181
		-	1			



XB4BP21



### Silicone booted heads only, with increased protection (IP 69K)

	Flush	Clear boot (2) For insertion of protected legend within head (3)	White	<b>ZB4BP18</b>	0.034/0.075
			Green	<b>ZB4BP38</b>	0.034/0.075
			Red	<b>ZB4BP48</b>	0.034/0.075
			Yellow	<b>ZB4BP58</b>	0.034/0.075
			Blue	<b>ZB4BP68</b>	0.034/0.075
			White	<b>ZB4BP1</b>	0.031/0.068
	Projecting	Clear boot (2)	Black	<b>ZB4BP2</b>	0.031/0.068
			Green	<b>ZB4BP3</b>	0.031/0.068
			Red	<b>ZB4BP4</b>	0.031/0.068
			Yellow	<b>ZB4BP5</b>	0.031/0.068
			Blue	<b>ZB4BP6</b>	0.031/0.068



ZB4BP18

### Silicone booted heads only, standard for mouting with legend holder (IP 66)

	Flush	Colored boot (4)	White	<b>ZB4BP1S</b>	0.034/0.075
			Black	<b>ZB4BP2S</b>	0.034/0.075
			Green	<b>ZB4BP3S</b>	0.034/0.075
			Red	<b>ZB4BP4S</b>	0.034/0.075
			Yellow	<b>ZB4BP5S</b>	0.034/0.075
			Blue	<b>ZB4BP6S</b>	0.034/0.075
		Clear membrane (4) For insertion of protected legend within head (3)	White	<b>ZB4BP183</b>	0.026/0.057
			Green	<b>ZB4BP383</b>	0.026/0.057
			Red	<b>ZB4BP483</b>	0.026/0.057
			Yellow	<b>ZB4BP583</b>	0.026/0.057
			Blue	<b>ZB4BP683</b>	0.026/0.057



ZB4BP2S



ZB4BP183

### Heads with black metal bezel

To order, add a figure 7 to the references selected from above.

Example: **ZB4BP18** becomes **ZB4BP187**.

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Permissible panel thickness Ø 1 to 5 mm/0.039 to 0.197 in., cannot be used with legend holders.

(3) To order a legend for insertion within the head, see page 57.

(4) Replacement of silicone protection element without dismantling head, see page 51.

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50



Pushbuttons with flush or projecting push (1)							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Shape of head	Type of push	Type of contact		Marking Text (color)	Color of push	Reference	Weight kg/lb
		N/O	N/C				
<b>Complete units</b>							
	Flush	1	–	"I" (White)	Green	<b>XB4BA3311</b> (ZB4BZ101 + ZB4BA331)	0.080/0.176
	Flush	–	1	"O" (White)	Red	<b>XB4BA4322</b> (ZB4BZ102 + ZB4BA432)	0.080/0.176
	Projecting	1	1	"O" (White)	Red	<b>XB4BL4325</b> (ZB4BZ105 + ZB4BL432)	0.080/0.176
	Flush (2)	1	–	↑ (Black)	White	<b>XB4BA3341</b> (ZB4BZ101 + ZB4BA334)	0.080/0.176
	Flush (2)	1	–	↓ (White)	Black	<b>XB4BA3351</b> (ZB4BZ101 + ZB4BA335)	0.080/0.176
<b>Heads only</b>							
	Flush			"I" (White)	Green	<b>ZB4BA331</b>	0.029/0.064
				"I" (Black)	White	<b>ZB4BA131</b>	0.029/0.064
				"II" (White)	Green	<b>ZB4BA336</b>	0.029/0.064
				"II" (Black)	White	<b>ZB4BA136</b>	0.029/0.064
				"START" (white)	Green	<b>ZB4BA333</b>	0.029/0.064
				"START" (Black)	White	<b>ZB4BA133</b>	0.029/0.064
				"ON" (White)	Green	<b>ZB4BA341</b>	0.029/0.064
				"ON" (Black)	White	<b>ZB4BA141</b>	0.029/0.064
				"MARCHE" (White)	Green	<b>ZB4BA342</b>	0.029/0.064
				"MARCHE" (Black)	White	<b>ZB4BA142</b>	0.029/0.064
				(White)	Black	<b>ZB4BA245</b>	0.029/0.064
				(Black)	White	<b>ZB4BA145</b>	0.029/0.064
				"O" (White)	Red	<b>ZB4BA432</b>	0.029/0.064
					Black	<b>ZB4BA232</b>	0.029/0.064
				"ARRET" (White)	Red	<b>ZB4BA433</b>	0.029/0.064
					Black	<b>ZB4BA233</b>	0.029/0.064
				"STOP" (White)	Red	<b>ZB4BA434</b>	0.029/0.064
					Black	<b>ZB4BA234</b>	0.029/0.064
				"OFF" (White)	Red	<b>ZB4BA435</b>	0.029/0.064
					Black	<b>ZB4BA235</b>	0.029/0.064
			↑ (Black) (2)	White	<b>ZB4BA334</b>	0.029/0.064	
			↓ (White) (2)	Black	<b>ZB4BA335</b>	0.029/0.064	
	Projecting			"O" (White)	Red	<b>ZB4BL432</b>	0.030/0.066
					Black	<b>ZB4BL232</b>	0.030/0.066
				"ARRET" (White)	Red	<b>ZB4BL433</b>	0.030/0.066
					Black	<b>ZB4BL233</b>	0.030/0.066
				"STOP" (White)	Red	<b>ZB4BL434</b>	0.030/0.066
					Black	<b>ZB4BL234</b>	0.030/0.066
				"OFF" (White)	Red	<b>ZB4BL435</b>	0.030/0.066
					Black	<b>ZB4BL235</b>	0.030/0.066

### Heads with black metal bezel

To order, add a figure 7 to the references selected from above.  
Example: **ZB4BA331** becomes **ZB4BA3317**.



- (1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.  
(2) Product supplied with cap not clipped-in, allowing orientation through 360° in 90° steps.

Assembly of other products using:  
 body/contact assemblies: see page 38  
 combined sub-assemblies: see page 44  
 accessories: see page 50

## Control and signaling units Ø 22


Harmony XB4, metal

Illuminated pushbuttons, spring return, with integral LED

Illuminated pushbuttons with flush push <sup>(1)</sup>							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Shape of head	Description	Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb
							
		N/O	N/C				

**Complete units - With plain lens**








Shape of head	Description	Type of contact	Type of contact	Supply voltage V	Color of push	Reference	Weight kg/lb	
	Integral LED	1	1	~ 24 50/60 Hz	White	<b>XB4BW31B5</b> (ZB4BW0B15 + ZB4BW313)	0.097/0.214	
					Green	<b>XB4BW33B5</b> (ZB4BW0B35 + ZB4BW333)	0.097/0.214	
					Red	<b>XB4BW34B5</b> (ZB4BW0B45 + ZB4BW343)	0.097/0.214	
					Orange	<b>XB4BW35B5</b> (ZB4BW0B55 + ZB4BW353)	0.097/0.214	
					Blue	<b>XB4BW36B5</b> (ZB4BW0B65 + ZB4BW363)	0.097/0.214	
					White	<b>XB4BW31G5</b> (ZB4BW0G15 + ZB4BW313)	0.097/0.214	
	~ 110...120 50/60 Hz	Integral LED	1	1	~ 110...120 50/60 Hz	Green	<b>XB4BW33G5</b> (ZB4BW0G35 + ZB4BW333)	0.097/0.214
						Red	<b>XB4BW34G5</b> (ZB4BW0G45 + ZB4BW343)	0.097/0.214
						Orange	<b>XB4BW35G5</b> (ZB4BW0G55 + ZB4BW353)	0.097/0.214
						Blue	<b>XB4BW36G5</b> (ZB4BW0G65 + ZB4BW363)	0.097/0.214
						White	<b>XB4BW31M5</b> (ZB4BW0M15 + ZB4BW313)	0.097/0.214
						Green	<b>XB4BW33M5</b> (ZB4BW0M35 + ZB4BW333)	0.097/0.214
~ 230...240 50/60 Hz	Integral LED	1	1	~ 230...240 50/60 Hz	Red	<b>XB4BW34M5</b> (ZB4BW0M45 + ZB4BW343)	0.097/0.214	
					Orange	<b>XB4BW35M5</b> (ZB4BW0M55 + ZB4BW353)	0.097/0.214	
					Blue	<b>XB4BW36M5</b> (ZB4BW0M65 + ZB4BW363)	0.097/0.214	
					White	<b>XB4BW31M5</b> (ZB4BW0M15 + ZB4BW313)	0.097/0.214	

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.



Assembly of other products using:  
combined sub-assemblies: see page 44  
accessories: see page 50



#### Illuminated pushbuttons with flush push (1)

Shape of head	Type of push	Color	Reference	Weight kg/lb
<b>Heads only (2) - With plain lens</b>				
 Protected LED	Flush	White	ZB4BW313	0.026/0.057
		Green	ZB4BW333	0.026/0.057
		Red	ZB4BW343	0.026/0.057
		Orange	ZB4BW353	0.026/0.057
		Blue	ZB4BW363	0.026/0.057
 Protected LED	Flush with illuminated ring	White	ZB4BW913	0.026/0.057
		Green	ZB4BW933	0.026/0.057
		Red	ZB4BW943	0.026/0.057
		Orange	ZB4BW953	0.026/0.057
		Blue	ZB4BW963	0.026/0.057
 Protected LED	Flush with clear boot (IP 69K)	White	ZB4BW513	0.031/0.068
		Green	ZB4BW533	0.031/0.068
		Red	ZB4BW543	0.031/0.068
		Orange	ZB4BW553	0.031/0.068
		Blue	ZB4BW563	0.031/0.068
 Protected LED	Flush for insertion of legend (3) (IP 69K)	White	ZB4BA18	0.028/0.062
		Green	ZB4BA38	0.028/0.062
		Red	ZB4BA48	0.028/0.062
		Orange	ZB4BA58	0.028/0.062
		Blue	ZB4BA68	0.028/0.062
<b>Heads only (2) - With grooved lens (4)</b>				
 Protected LED	Flush	White	ZB4BW313S	0.026/0.057
		Green	ZB4BW333S	0.026/0.057
		Red	ZB4BW343S	0.026/0.057
		Orange	ZB4BW353S	0.026/0.057
		Blue	ZB4BW363S	0.026/0.057

#### Illuminated pushbuttons with projecting push (1)

Shape of head	Type of push	Color	Reference	Weight kg/lb
<b>Heads only (2) - With plain lens</b>				
 Protected LED	Projecting	White	ZB4BW113	0.029/0.064
		Green	ZB4BW133	0.029/0.064
		Red	ZB4BW143	0.029/0.064
		Orange	ZB4BW153	0.029/0.064
		Blue	ZB4BW163	0.029/0.064
 Protected LED	Projecting	White	ZB4BW113S	0.026/0.057
		Green	ZB4BW133S	0.026/0.057
		Red	ZB4BW143S	0.026/0.057
		Orange	ZB4BW153S	0.026/0.057
		Blue	ZB4BW163S	0.026/0.057

#### Heads with black metal bezel

To order, add a figure 7 to the references selected from above.

Example 1: ZB4BW313 becomes ZB4BW3137.

Example 2: ZB4BW313S becomes ZB4BW313S7.

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Only for use with bodies comprising a light source with integral LED.

(3) For legend ordering information, see page 57.

(4) For use in bright ambient light conditions (for example, outdoors in sunlight).


Assembly of other products using:  
combined sub-assemblies: see page 44  
accessories: see page 50

## Control and signaling units Ø 22

Harmony XB4, metal  
Illuminated pushbuttons, spring return,  
with BA 9s base fitting

Illuminated pushbuttons with flush push (1)							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Shape of head	Description	Type of contact		Supply voltage V	Color of push	Reference	Weight kg/lb
		N/O	N/C				


### Complete units - With plain lens

 XB4BW3545	Direct supply for bulb with BA 9s base fitting, 2.4 W max (bulb not included)	1	1	≤ 250	White	<b>XB4BW3165</b> (ZB4BW065 + ZB4BW31)	0.097/0.214	
					Green	<b>XB4BW3365</b> (ZB4BW065 + ZB4BW33)	0.097/0.214	
					Red	<b>XB4BW3465</b> (ZB4BW065 + ZB4BW34)	0.097/0.214	
					Orange	<b>XB4BW3565</b> (ZB4BW065 + ZB4BW35)	0.097/0.214	
	Via integral transformer 1.2 VA, 6 V secondary, incandescent bulb with BA 9s base fitting (bulb included)	1	1	~110...120 50/60 Hz	White	<b>XB4BW3135</b> (ZB4BW035 + ZB4BW31)	0.169/0.373	
					Green	<b>XB4BW3335</b> (ZB4BW035 + ZB4BW33)	0.169/0.373	
					Red	<b>XB4BW3435</b> (ZB4BW035 + ZB4BW34)	0.169/0.373	
					Orange	<b>XB4BW3535</b> (ZB4BW035 + ZB4BW35)	0.169/0.373	
		~ 230 50 Hz ~220...240 60 Hz	1	1		White	<b>XB4BW3145</b> (ZB4BW045 + ZB4BW31)	0.170/0.375
						Green	<b>XB4BW3345</b> (ZB4BW045 + ZB4BW33)	0.170/0.375
						Red	<b>XB4BW3445</b> (ZB4BW045 + ZB4BW34)	0.170/0.375
						Orange	<b>XB4BW3545</b> (ZB4BW045 + ZB4BW35)	0.170/0.375

### Heads only (2) - With plain lens

 ZB4BW33	Flush	White	<b>ZB4BW31</b>	0.027/0.060
		Green	<b>ZB4BW33</b>	0.027/0.060
		Red	<b>ZB4BW34</b>	0.027/0.060
		Orange	<b>ZB4BW35</b>	0.027/0.060
		Blue	<b>ZB4BW36</b>	0.027/0.060
		Clear	<b>ZB4BW37</b>	0.027/0.060

### Heads only (2) - With grooved lens (3)


	Flush	White	<b>ZB4BW31S</b>	0.027/0.060
		Green	<b>ZB4BW33S</b>	0.027/0.060
		Red	<b>ZB4BW34S</b>	0.027/0.060
		Orange	<b>ZB4BW35S</b>	0.027/0.060
		Blue	<b>ZB4BW36S</b>	0.027/0.060
		Clear	<b>ZB4BW37S</b>	0.027/0.060

### Illuminated pushbuttons with projecting push (1)

#### Heads only (2) - With plain lens

 ZB4BW14	Projecting	White	<b>ZB4BW11</b>	0.028/0.062
		Green	<b>ZB4BW13</b>	0.028/0.062
		Red	<b>ZB4BW14</b>	0.028/0.062
		Orange	<b>ZB4BW15</b>	0.028/0.062
		Blue	<b>ZB4BW16</b>	0.028/0.062
		Clear	<b>ZB4BW17</b>	0.028/0.062

#### Heads only (2) - With grooved lens (3)

	Projecting	White	<b>ZB4BW11S</b>	0.027/0.060
		Green	<b>ZB4BW13S</b>	0.027/0.060
		Red	<b>ZB4BW14S</b>	0.027/0.060
		Orange	<b>ZB4BW15S</b>	0.027/0.060
		Blue	<b>ZB4BW16S</b>	0.027/0.060
		Clear	<b>ZB4BW17S</b>	0.027/0.060

### Heads with black metal bezel

To order, add a figure 7 to the references selected from above.

Example: **ZB4BW31** becomes **ZB4BW317**. Example 2: **ZB4BW31S** becomes **ZB4BW31S7**.

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Only for use with bodies comprising a light source with BA9s base fitting bulb (incandescent, neon or LED).


(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

User assembly of other units, using:  
body-contact assemblies: see page 38  
combined sub-assemblies: see page 44



**Double-headed pushbuttons (1)**  
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Description	Type of contact	Color and marking of caps (2)	Reference	Weight kg/lb
		N/O	N/C		

**Complete units**

	2 pushes (1 flush Black + 1 projecting Red)	1	1	White "I" on Green background White "0" on Red background	<b>XB4BL73415</b>	0.116/0.256
---	---	---	---	--	-------------------	-------------


**Heads only**

	2 flush Black pushes			White and Black background, unmarked	<b>ZB4BA7120</b>	0.056/0.123
				Black "I" on White background White "0" on Black background	<b>ZB4BA7121</b>	0.056/0.123
				Green and Red background, unmarked	<b>ZB4BA7340</b>	0.056/0.123
				White "I" on Green background White "0" on Red background	<b>ZB4BA7341</b>	0.056/0.123
				Without cap (3)	<b>ZB4BA79</b>	0.056/0.123
	1 flush Black push 1 projecting Red push			Green and Red background, unmarked	<b>ZB4BL7340</b>	0.056/0.123
				White "I" on Green background White "0" on Red background	<b>ZB4BL7341</b>	0.056/0.123



**Double-headed pushbuttons + 1 white central pilot light block (1)**  
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Description	Type of contact	Color and marking of caps (2)	Pilot light voltage V	Reference	Weight kg/lb
		N/O	N/C			

**Complete units**

	1 flush Black push 1 projecting Red push 1 White central pilot light block	1	1	White "I" on Green background White "0" on Red background	24 120	<b>XB4BW73731B5</b> <b>XB4BW73731G5</b>	0.130/0.287 0.130/0.287
					240	<b>XB4BW73731M5</b>	0.130/0.287

**Heads only (5)**




	2 flush Black pushes 1 clear central pilot light (4)			White and Black background, unmarked		<b>ZB4BW7A1720</b>	0.056/0.123
				Black "I" on White background White "0" on Black background		<b>ZB4BW7A1721</b>	0.056/0.123
				Green and Red background, unmarked		<b>ZB4BW7A3740</b>	0.056/0.123
				White "I" on Green background White "0" on Red background		<b>ZB4BW7A3741</b>	0.056/0.123
				Black "I" on White background White "0" on Black background		<b>ZB4BW7A1724</b>	0.056/0.123
				Black "+" on White background Black "-" on White background		<b>ZB4BW7A1715</b>	0.056/0.123
				Without cap (3)		<b>ZB4BW7A9</b>	0.056/0.123
	1 flush Black push 1 projecting Red push 1 clear central pilot light (4)			Green and Red background, unmarked		<b>ZB4BW7L3740</b>	0.056/0.123
				White "I" on Green background White "0" on Red background		<b>ZB4BW7L3741</b>	0.056/0.123


**Heads with black metal bezel**

To order, add the suffix 7 to the references selected above. Example: **ZB4BA7120** becomes **ZB4BA71207**.

- (1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.
- (2) These caps are fitted by Schneider Electric and cannot be removed (risk of damage).
- (3) Caps to be ordered separately: see page opposite.
- (4) Color of centrally positioned pilot light determined by the color of the LED incorporated in the body sub-assembly.
- (5) Only for use with bodies comprising a light source with integral LED.

User assembly of other units, using:  
body-contact assemblies: see page 38  
combined sub-assemblies: see page 44

Triple-headed pushbuttons (1) (2)							
Screw clamp terminal connections (Schneider Electric anti-loosening system)							
Shape of head	Description	Type of contact			Color and marking of caps (3)	Reference	Weight kg/lb
							
		N/O	N/C	N/O			

Complete units							
	2 flush Black pushes + 1 central projecting Red push marked "Stop" in White	1	1	1	White "I" on Green background White "II" on Green background	<b>XB4BA731327</b>	0.128/0.282
					Black "→" on White background White "←" on Black background	<b>XB4BA711237</b>	0.128/0.282

Heads only							
	2 flush Black pushes + 1 central projecting Red push marked "Stop" in White				White "I" on Green background White "II" on Green background	<b>ZB4BA73132</b>	0.056/0.123
					White "←" on Green background White "→" on Green background	<b>ZB4BA73133</b>	0.056/0.123
					White "↑" on Green background White "↓" on Green background	<b>ZB4BA73134</b>	0.056/0.123
					White "+" on Green background White "-" on Green background	<b>ZB4BA73135</b>	0.056/0.123
					Black "+" on White background Black "-" on White background	<b>ZB4BA71115</b>	0.056/0.123
					Black "→" on White background White "←" on black background	<b>ZB4BA71123</b>	0.056/0.123
					Black "↑" on White background White "↓" on Black background	<b>ZB4BA71124</b>	0.056/0.123
					White "↑" on Black background White "↓" on Black background	<b>ZB4BA72124</b>	0.056/0.123
					Without cap (4)	<b>ZB4BA791</b>	0.056/0.123

Specific accessories for multiple-headed pushbuttons						
Description	Background color	Marking	Sold in lots of	Reference	Weight kg/lb	
Caps only for clip-on mounting (5) on: - ZB4BA79 double-headed pushbuttons - ZB4BW7A9 double-headed pushbuttons + central pilot light block - ZB4BA791 triple-headed pushbuttons	White	Unmarked	10	<b>ZBA71</b>	0.010/0.022	
		"I" black	10	<b>ZBA7131</b>	0.010/0.022	
		"→" black	10	<b>ZBA7134</b>	0.010/0.022	
		"+" black	10	<b>ZBA7138</b>	0.010/0.022	
	Black	Unmarked	10	<b>ZBA72</b>	0.010/0.022	
		"O" White	10	<b>ZBA7232</b>	0.010/0.022	
		"+" White	10	<b>ZBA7233</b>	0.010/0.022	
		"→" White	10	<b>ZBA7235</b>	0.010/0.022	
	Green	"I" White	10	<b>ZBA7237</b>	0.010/0.022	
		Unmarked	10	<b>ZBA73</b>	0.010/0.022	
		"I" White	10	<b>ZBA7331</b>	0.010/0.022	
		"+" White	10	<b>ZBA7333</b>	0.010/0.022	
Red	"↑" White	10	<b>ZBA7335</b>	0.010/0.022		
	"II" White	10	<b>ZBA7336</b>	0.010/0.022		
Yellow	Unmarked	10	<b>ZBA74</b>	0.010/0.022		
	"O" White	10	<b>ZBA7432</b>	0.010/0.022		
Blue	Unmarked	10	<b>ZBA75</b>	0.010/0.022		
	Unmarked	10	<b>ZBA76</b>	0.010/0.022		

Clear silicone boots (6)	For 2 flush pushes	-	10	<b>ZBA708</b>	0.055/0.121
	For 3 pushes	-	10	<b>ZBA709</b>	0.055/0.121
	For 1 flush push + 1 projecting push	-	10	<b>ZBA710</b>	0.055/0.121

### Heads with black metal bezel

To order, add the suffix 7 to the references selected above.

Example: **ZB4BA73132** becomes **ZB4BA731327**.

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(2) Not compatible with high power switching contacts and contacts for printed circuit board.

(3) These caps are fitted by Schneider Electric and cannot be removed (risk of damage).

(4) Caps to be ordered separately: see accessories on this page.

(5) Can be clipped-in at 90° steps, through 360°.

(6) Can be replaced without dismantling the head.



XB4BA731327



ZB4BA73133



ZB4BA71124



ZBA7235



ZBA7432



ZBA709

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50



Mushroom head pushbuttons (1) (2)						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of push	Type of contact		Push Ø (mm)/in.	Color	Reference
		N/O	N/C			

Complete units							
	Mushroom head	1	–	40/1.575	Black	XB4BC21 (ZB4BZ101 + ZB4BC2)	0.122/0.269

Heads only							
	Mushroom head			30/1.181	Black	ZB4BC24	0.075/0.165
					Green	ZB4BC34	0.075/0.165
					Red	ZB4BC44	0.075/0.165
					Yellow	ZB4BC54	0.075/0.165
					Blue	ZB4BC64	0.075/0.165
				40/1.575	Black	ZB4BC2	0.074/0.163
					Green	ZB4BC3	0.074/0.163
					Red	ZB4BC4	0.074/0.163
					Yellow	ZB4BC5	0.074/0.163
					Blue	ZB4BC6	0.074/0.163
Green	ZB4BR3	0.093/0.205					
Red	ZB4BR4	0.093/0.205					
Yellow	ZB4BR5	0.093/0.205					
Blue	ZB4BR6	0.093/0.205					
				60/2.362 (3) Hemispherical			
					Green	ZB4BR316	0.054/0.119
					Red	ZB4BR416	0.054/0.119
					Yellow	ZB4BR516	0.054/0.119
					Blue	ZB4BR616	0.054/0.119

### Illuminated mushroom head pushbuttons (1) (2)

Integral LED						
Shape of head	Type of push	Push Ø (mm)/in.	Color	Reference	Weight kg/lb	

Heads only (4)							
	Mushroom head			40/1.575	White	ZB4BW413	0.051/0.112
					Green	ZB4BW433	0.051/0.112
					Red	ZB4BW443	0.051/0.112
					Orange	ZB4BW453	0.051/0.112
					Blue	ZB4BW463	0.051/0.112




### Heads with black metal bezel

To order, add a figure 7 to the references selected above.  
Example: ZB4BC24 becomes ZB4BC247.

- (1) These pushbuttons and heads cannot be used for an Emergency Stop function. Therefore, it is recommended that a legend with a Black or White background is used.
- (2) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.
- (3) Ergonomic product used in two-handed control applications. Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head: 6.
- (4) Only for use with bodies comprising a light block with integral LED.


Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

## Mushroom head pushbuttons (1)(2)

Shape of head	Type of reset	Push Ø (mm)/in.	Color	Reference	Weight kg/lb
<b>Heads only</b>					
	Push-pull	40/1.575	Black	<b>ZB4BT2</b>	0.077/0.170
		60/2.362	Black	<b>ZB4BX2</b>	0.095/0.209
	Turn to release	30/1.181	Black	<b>ZB4BS42</b>	0.066/0.146
		40/1.575	Black	<b>ZB4BS52</b>	0.070/0.154
		40/1.575	Yellow	<b>ZB4BS55</b>	0.070/0.154
		60/2.362	Black	<b>ZB4BS62</b>	0.090/0.198
	Key release (key n° 455) (2 keys included with head) (3) (5)	30/1.181	Black	<b>ZB4BS72</b>	0.066/0.146
		40/1.575	Black	<b>ZB4BS12 (4)</b>	0.070/0.154
		60/2.362	Black	<b>ZB4BS22</b>	0.090/0.198

## Illuminated mushroom head pushbuttons (1) (2)

## Integral LED

Shape of head	Type of reset	Push Ø (mm)/in.	Color	Reference	Weight kg/lb
<b>Heads only</b>					
	Mushroom head	40/1.575	White	<b>ZB4BW613</b>	0.051/0.112
			Green	<b>ZB4BW633</b>	0.051/0.112
			Orange	<b>ZB4BW653</b>	0.051/0.112
			Blue	<b>ZB4BW663</b>	0.051/0.112

## Heads with black metal bezel

To order, add a figure 7 to the references selected above.  
Example: **ZB4BT2** becomes **ZB4BT27**.

(1) These pushbuttons and heads cannot be used for an Emergency Stop function.

Therefore, it is recommended that a legend with a Black or White background is used.

(2) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

(3) For specific keys with other numbers, please consult our Customer Care Centre.

(4) Other key numbers:


- key n° 421E: add suffix **12** to the reference.

- key n° 458A: add suffix **10** to the reference.

- key n° 520E: add suffix **14** to the reference.

- key n° 3131A: add suffix **20** to the reference.

Example: To order a Ø 40 mm/1.575 in. Black mushroom head for a latching pushbutton, with release by key n° 421E, the reference becomes: **ZB4BS1212**.

(5) The symbol  indicates key withdrawal position(s).

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see pages 57 and 58

## Control and signaling units Ø 22

Harmony XB4, metal

Emergency stop and Emergency switching off functions

Conforming to EN/IEC 60204-1, 60364-5-53,  
EN/ISO 13850 and Machinery Directive 2006/42/EC




Emergency stop function: Mushroom head Emergency stop trigger action and mechanical latching pushbuttons conform to standards EN/IEC 60204-1 and EN/ISO 13850, to Machinery Directive 2006/42/EC and to standard EN/IEC 60947-5-5.

Emergency switching off function: Mushroom head switching off mechanical latching pushbuttons conform to standards IEC 60364-5-53 and EN/IEC 60947-5-5.




Please consult our Customer Care Centre for a full explanation of these standards and directives.

### Emergency stop and switching off pushbuttons with trigger action and mechanical latching (1) (2)

Screw clamp terminal connections (Schneider Electric anti-loosening system)


Shape of head	Type of reset	Type of contact		Push Ø (mm)/in.	Color	Reference	Weight kg/lb
		N/O	N/C				
<b>Complete units</b>							
	Push-pull	–	1	40/1.575	Red	<b>XB4BT842</b> (ZB4BZ105 + ZB4BT84)	0.125/0.276
		1	1	40/1.575	Red	<b>XB4BT845</b> (ZB4BZ105 + ZB4BT84)	0.136/0.300
	Turn to release	–	1	40/1.575	Red	<b>XB4BS8442</b> (ZB4BZ102 + ZB4BS844)	0.118/0.260
		1	1	40/1.575	Red	<b>XB4BS8445</b> (ZB4BZ105 + ZB4BS844)	0.130/0.287
		–	2	40/1.575	Red	<b>XB4BS8444</b> (ZB4BZ104 + ZB4BS844)	0.130/0.287
		1	2	40/1.575	Red	<b>XB4BS8441</b> (ZB4BZ141 + ZB4BS844)	0.140/0.309
	Key release (key n° 455) (3)	1	1	40/1.575	Red	<b>XB4BS9445</b> (ZB4BZ105 + ZB4BS944)	0.170/0.375

### Heads only

Shape of head	Type of reset	Push Ø (mm)/in.	Color	Reference	Weight kg/lb
	Push-pull	30/1.181	Red	<b>ZB4BT844</b>	0.078/0.172
		40/1.575	Red	<b>ZB4BT84</b>	0.078/0.172
		60/2.362	Red	<b>ZB4BX84</b>	0.098/0.216
	Turn to release	30/1.181	Red	<b>ZB4BS834</b>	0.068/0.150
		40/1.575	Red	<b>ZB4BS844</b>	0.073/0.161
		60/2.362	Red	<b>ZB4BS864</b>	0.093/0.205
		30/1.181	Red	<b>ZB4BS934</b>	0.094/0.207
	Key release (key n° 455) 2 keys included with head (5) (3)	40/1.575	Red	<b>ZB4BS944 (4)</b>	0.098/0.216
		60/2.362	Red	<b>ZB4BS964</b>	0.118/0.260


### Illuminated Emergency switching off function only, mechanical latching pushbuttons (1)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of reset	Push Ø (mm)/in.	Color	Reference	Weight kg/lb
<b>Heads only (6)</b>					
	Push-pull	40/1.575	Red	<b>ZB4BW643</b>	0.051/0.112

(1) Recommended maximum number of contacts constituting the body (fixing collar + contact) associated with the head, see page 12.

(2) It is recommended that a legend or Yellow background is used.

(3) The symbol  indicates key withdrawal position(s).

(4) Other key numbers:

- key n° 421E: add suffix **12** to the reference.
- key n° 458A: add suffix **10** to the reference.
- key n° 520E: add suffix **14** to the reference.
- key n° 3131A: add suffix **20** to the reference.
- key n° 4A185: add suffix **D** to the reference.

Example: To order a Ø 40 mm/1.575 in. Red mushroom head for a trigger action and mechanical latching Emergency stop pushbutton, with release by key n° 421E, the reference becomes: **ZB4BS94412**.

(5) For specific keys with other numbers, please consult our Customer Care Centre.

(6) Only for use with bodies comprising a light source with integral LED.

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see pages 57 and 58

## Control and signaling units Ø 22

Harmony XB4, metal

Emergency stop and Emergency switching off functions  
Conforming to EN/IEC 60204-1, 60364-5-53,  
EN/ISO 13850 and Machinery Directive 2006/42/EC

### Circular yellow legends for Emergency stop (1)

Description	Marking	Color	Sold in lots of	Reference	Weight kg/lb
Ø 60 mm/2.362 in. legend for Emergency stop function	-	Yellow	5	ZBY9121	0.007/0.015
	EMERGENCY STOP	Yellow	5	ZBY9320	0.007/0.015
	ARRET D'URGENCE	Yellow	5	ZBY9120	0.007/0.015
	NOT HALT	Yellow	5	ZBY9220	0.007/0.015
	PARADA DE EMERGENCIA	Yellow	5	ZBY9420	0.007/0.015
	ARRESTO DI EMERGENZA	Yellow	5	ZBY9620	0.007/0.015

### Bellows for harsh environments (IP 69K) (2)

For use in	Material	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
Environments subject to humidity, dust, high pressure cleaning, etc.	Silicone	Emergency stop / Switching off function	Yellow	2	ZBZ28	0.009/0.020
		Other functions	Black	2	ZBZ58	0.009/0.020

### Heads with black metal bezel

To order, add a figure 7 to the references selected above.  
Example: ZB4BT844 becomes ZB4BT8447.


- (1) Other legend models for Emergency stop and Emergency switching off function see page 58 of catalog DIA5ED2121212EN.  
(2) Not compatible with Ø 30 mm/1.181 in. pushbutton.



ZBY9121





ZBY9420



ZBZ8


Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

### Pushbuttons with flush push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
<b>Heads only</b>				
	Without cap (2)	–	<b>ZB4BH0</b>	0.028/0.062
	Flush	White	<b>ZB4BH01</b>	0.029/0.064
		Black	<b>ZB4BH02</b>	0.029/0.064
		Green	<b>ZB4BH03</b>	0.029/0.064
		Red	<b>ZB4BH04</b>	0.029/0.064
		Yellow	<b>ZB4BH05</b>	0.029/0.064
		Blue	<b>ZB4BH06</b>	0.029/0.064



### Pushbuttons with projecting push (1)

Shape of head	Type of push	Color of push	Reference	Weight kg/lb
<b>Heads only</b>				
	Projecting	White	<b>ZB4BH1</b>	0.029/0.064
		Black	<b>ZB4BH2</b>	0.029/0.064
		Green	<b>ZB4BH3</b>	0.029/0.064
		Red	<b>ZB4BH4</b>	0.029/0.064
		Yellow	<b>ZB4BH5</b>	0.029/0.064
		Blue	<b>ZB4BH6</b>	0.029/0.064




### Heads with black metal bezel

To order, add a figure 7 to the references selected above.  
Example: **ZB4BH01** becomes **ZB4BH017**.

- (1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.  
(2) Caps to be ordered separately, see page 50.


Assembly of other products using:  
combined sub-assemblies: see page 44  
accessories: see page 50

#### Illuminated pushbuttons with flush push (1)

Shape of head	Type of push	Color of lens	Reference	Weight kg/lb
<b>Heads only (2)</b>				
	Flush	White	ZB4BH013	0.026/0.057
		Green	ZB4BH033	0.026/0.057
		Red	ZB4BH043	0.026/0.057
		Orange	ZB4BH053	0.026/0.057
		Blue	ZB4BH063	0.026/0.057



#### Illuminated pushbuttons with projecting push (1)

Shape of head	Type of push	Color of lens	Reference	Weight kg/lb
<b>Heads only (2)</b>				
	Projecting	White	ZB4BH13	0.026/0.057
		Green	ZB4BH33	0.026/0.057
		Red	ZB4BH43	0.026/0.057
		Orange	ZB4BH53	0.026/0.057
		Blue	ZB4BH63	0.026/0.057



#### Heads with black metal bezel

To order, add a figure 7 to the references selected above.  
Example: ZB4BH013 becomes ZB4BH0137.

- (1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.  
(2) Only for use with bodies comprising a light source with integral LED.

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

#### Selector switches with standard handle <sup>(1)</sup>

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Type of operator	Type of contact		Positions		Reference	Weight kg/lb
		N/O	N/C	Number	Type		

#### Complete units



	Standard handle, black	1	–	2-position 90°	Stay put		<b>XB4BD21</b> (ZB4BZ101 + ZB4BD2)	0.095/0.209
		1	–		Spring return from right to left		<b>XB4BD41</b> (ZB4BZ101 + ZB4BD4)	0.100/0.220
		1	1		Stay put		<b>XB4BD25</b> (ZB4BZ105 + ZB4BD2)	0.095/0.209
		2	–	3-position ± 45°	Stay put		<b>XB4BD33</b> (ZB4BZ103 + ZB4BD3)	0.095/0.209
					Spring return to centre		<b>XB4BD53</b> (ZB4BZ103 + ZB4BD5)	0.095/0.209

#### Heads only



	Standard handle, black			2-position 90°	Stay put		<b>ZB4BD2</b>	0.040/0.088
					Spring return from right to left		<b>ZB4BD4</b>	0.045/0.099
				3-position ± 45°	Stay put		<b>ZB4BD3</b>	0.040/0.088
					Spring return to centre		<b>ZB4BD5</b>	0.040/0.088
					Spring return from left to centre		<b>ZB4BD7</b>	0.040/0.088
					Spring return from right to centre		<b>ZB4BD8</b>	0.040/0.088

#### Heads only with other colored handles

	Standard handle, white	add suffix <b>01</b> to the reference, example: <b>ZB4BD201</b>
	Standard handle, green	add suffix <b>03</b> to the reference, example: <b>ZB4BD203</b>
	Standard handle, red	add suffix <b>04</b> to the reference, example: <b>ZB4BD204</b>
	Standard handle, yellow	add suffix <b>05</b> to the reference, example: <b>ZB4BD205</b>
	Standard handle, blue	add suffix <b>06</b> to the reference, example: <b>ZB4BD206</b>


#### Heads with black metal bezel


For heads with standard black handle only. To order, add the suffix 7 to the references selected from above.  
Example: **ZB4BD2** becomes **ZB4BD27**.


(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar + contact) associated with the head, see page 12.

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50

Selector switches with long handle <sup>(1)</sup>						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of operator	Type of contact		Positions		Reference
		N/O	N/C	Number	Type	

Complete units							
	Long handle, black	1	-	2-position 90°	Stay put	<b>XB4BJ21</b> (ZB4BZ101 + ZB4BJ2)	0.096/0.212
				3-position ± 45°	Stay put	<b>XB4BJ33</b> (ZB4BZ103 + ZB4BJ3)	0.096/0.212
					Spring return to centre	<b>XB4BJ53</b> (ZB4BZ103 + ZB4BJ5)	0.096/0.212

Heads only							
	Long handle, black			2-position 90°	Stay put	<b>ZB4BJ2</b>	0.040/0.088
					Spring return from right to left	<b>ZB4BJ4</b>	0.045/0.099
				3-position ± 45°	Stay put	<b>ZB4BJ3</b>	0.040/0.088
					Spring return to centre	<b>ZB4BJ5</b>	0.040/0.088
					Spring return from left to centre	<b>ZB4BJ7</b>	0.040/0.088
					Spring return from right to centre	<b>ZB4BJ8</b>	0.040/0.088


	Long handle, padlockable (2)			2-position 90°	Stay put	<b>ZB4BJ291</b>	0.048/0.106
						<b>ZB4BJ292</b>	0.048/0.106
						<b>ZB4BJ294</b>	0.048/0.106
					Spring return from right to left	<b>ZB4BJ491</b>	0.054/0.119
				3-position ± 45°	Stay put	<b>ZB4BJ391</b>	0.048/0.106
						<b>ZB4BJ392</b>	0.048/0.106
						<b>ZB4BJ393</b>	0.048/0.106
						<b>ZB4BJ394</b>	0.048/0.106
						<b>ZB4BJ395</b>	0.048/0.106
						<b>ZB4BJ396</b>	0.048/0.106
						<b>ZB4BJ397</b>	0.048/0.106
					Spring return to centre	<b>ZB4BJ593</b>	0.048/0.106
					Spring return from right to centre	<b>ZB4BJ891</b>	0.048/0.106
						<b>ZB4BJ893</b>	0.048/0.106
						<b>ZB4BJ895</b>	0.048/0.106
					Spring return from left to centre	<b>ZB4BJ792</b>	0.048/0.106
		<b>ZB4BJ793</b>	0.048/0.106				
		<b>ZB4BJ796</b>	0.048/0.106				

#### Heads with black metal bezel


To order, add a figure 7 to the references selected from above.

Example: **ZB4BJ2** becomes **ZB4BJ27**.

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar + contact) associated with the head, see page 12.

(2) The symbol  indicates the padlocking positions.

PF108190



ZB4BJ33

PF108196



ZB4BJ3

PF108197






















ZB4BJ291

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50


Key switches (1) (2)						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of operator	Type of contact		Positions		Reference
		N/O	N/C	Number	Type	

Complete units								
		Key switch with key n° 455	1	-	2-position 90°	Stay put	 <b>XB4BG21</b> (ZB4BZ101 + ZB4BG2)	0.153/0.337
						Spring return to left	 <b>XB4BG41</b> (ZB4BZ101 + ZB4BG4)	0.153/0.337
			2	-	3-position ± 45°	Stay put	 <b>XB4BG03</b> (ZB4BZ103 + ZB4BG0)	0.153/0.337
							 <b>XB4BG33</b> (ZB4BZ103 + ZB4BG3)	0.153/0.337

Heads only											
		Key switch with key n° 455 (3) (4)	2-position 90°		2-position 90°	Stay put	 <b>ZB4BG2</b>	0.098/0.216			
							 <b>ZB4BG02</b>	0.098/0.216			
							 <b>ZB4BG4</b>	0.098/0.216			
						Spring return from right to left	 <b>ZB4BG6</b>	0.098/0.216			
						3-position ± 45°		3-position ± 45°	Stay put	 <b>ZB4BG0</b>	0.098/0.216
										 <b>ZB4BG03</b>	0.098/0.216
				 <b>ZB4BG04</b>	0.098/0.216						
				 <b>ZB4BG3</b>	0.098/0.216						
				 <b>ZB4BG5</b>	0.098/0.216						
				 <b>ZB4BG9</b>	0.098/0.216						
				 <b>ZB4BG09</b>	0.098/0.216						
			Spring return from left to centre	 <b>ZB4BG1</b>	0.098/0.216						
				 <b>ZB4BG01</b>	0.098/0.216						
			Spring return to centre	 <b>ZB4BG7</b>	0.098/0.216						
Spring return from right to centre	 <b>ZB4BG8</b>	0.098/0.216									
	 <b>ZB4BG05</b>	0.098/0.216									
	 <b>ZB4BG08</b>	0.098/0.216									

### Heads with black metal bezel

To order, add a figure 7 to the references selected from above. Example: **ZB4BG2** becomes **ZB4BG27**.

- (1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.
- (2) The symbol  indicates key withdrawal position(s).
- (3) Other key numbers:
  - key n° 421E: add suffix **12** to the reference.
  - key n° 458A: add suffix **10** to the reference.
  - key n° 520E: add suffix **14** to the reference.
  - key n° 3131A: add suffix **20** to the reference.

Example: For a switch head with key n° 421E, 2-position stay put, with key withdrawal from the left-hand position, the reference becomes: **ZB4BG212**.
- (4) For specific keys with other numbers, please consult our Customer Care Centre.











Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50









## Control and signaling units Ø 22




Harmony XB4, metal

Key switches with key TEC10

Selector switches with knurled knob - Toggle switches

Key switches with key TEC10							
Shape of head	Type of operator	Positions		Reference	Weight kg/lb		
		Number	Type				
<b>Heads only</b>							
	Key switch with key TEC10	2-position 90°	Stay put		<b>ZB4BG2TEC10</b>	0.160/0.353	
					<b>ZB4BG4TEC10</b>	0.160/0.353	
		3-position ± 45°	Stay put	Spring return from right to left		<b>ZB4BG6TEC10</b>	0.170/0.375
						<b>ZB4BG0TEC10</b>	0.160/0.353
				Spring return to centre		<b>ZB4BG3TEC10</b>	0.160/0.353
						<b>ZB4BG5TEC10</b>	0.160/0.353
				Spring return from right to centre		<b>ZB4BG9TEC10</b>	0.160/0.353
						<b>ZB4BG7TEC10</b>	0.170/0.375
			<b>ZB4BG05TEC10</b>	0.170/0.375			

Selector switches with knurled knob (1)							
Shape of head	Type of operator	Positions		Reference	Weight kg/lb		
		Number	Type				
<b>Heads only</b>							
	Black knurled knob	2-position 90°	Stay put		<b>ZB4BD29</b>	0.043/0.095	
					<b>ZB4BD49</b>	0.050/0.110	
		3-position ± 45°	Stay put	Spring return to centre		<b>ZB4BD39</b>	0.040/0.088
						<b>ZB4BD59</b>	0.040/0.088
				Spring return from left to centre		<b>ZB4BD79</b>	0.040/0.088
						<b>ZB4BD89</b>	0.040/0.088
							

Toggle switches (1)						
Shape of head	Type of operator	Positions		Reference	Weight kg/lb	
		Number	Type			
<b>Heads only</b>						
	Black lever	2-position 90°	Stay put		<b>ZB4BD28</b>	0.026/0.057
					<b>ZB4BD48</b>	0.026/0.057



### Heads with black metal bezel






To order, add a figure 7 to the references selected from above.  
Example: **ZB4BD29** becomes **ZB4BD297**.

For the references with key TEC10, add the 7 before TEC10.  
Example: **ZB4BG2TEC10** becomes **ZB4BG27TEC10**.

(1) Recommended maximum number of contacts and sequence of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.

Assembly of other products using:  
combined sub-assemblies: see page 38  
accessories: see page 50

Illuminated selector switches with standard handle, with integral LED <sup>(1)</sup>						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Shape of head	Type of operator	Type of contact	Positions Number Type	Supply voltage V	Color of handle	Reference
						
						
		N/O	N/C			

Complete units														
		Standard handle	1	1	2-position Stay put  90°	~ 24 (50/60 Hz)	Green <b>XB4BK123B5</b> (ZB4BW0B35 + ZB4BK1233)	0.101/0.223						
							Red <b>XB4BK124B5</b> (ZB4BW0B45 + ZB4BK1243)	0.101/0.223						
							Orange <b>XB4BK125B5</b> (ZB4BW0B55 + ZB4BK1253)	0.101/0.223						
						~ 110...120 (50/60 Hz)	Green <b>XB4BK123G5</b> (ZB4BW0G35 + ZB4BK1233)	0.101/0.223						
							Red <b>XB4BK124G5</b> (ZB4BW0G45 + ZB4BK1243)	0.101/0.223						
							Orange <b>XB4BK125G5</b> (ZB4BW0G55 + ZB4BK1253)	0.101/0.223						
						~ 230...240 (50/60 Hz)	Green <b>XB4BK123M5</b> (ZB4BW0M35 + ZB4BK1233)	0.101/0.223						
							Red <b>XB4BK124M5</b> (ZB4BW0M45 + ZB4BK1243)	0.101/0.223						
							Orange <b>XB4BK125M5</b> (ZB4BW0M55 + ZB4BK1253)	0.101/0.223						
									1	1	3-position Stay put  ± 45°	~ 24 (50/60 Hz)	Green <b>XB4BK133B5</b> (ZB4BW0B35 + ZB4BK1333)	0.101/0.223
													Red <b>XB4BK134B5</b> (ZB4BW0B45 + ZB4BK1343)	0.101/0.223
													Orange <b>XB4BK135B5</b> (ZB4BW0B55 + ZB4BK1353)	0.101/0.223
~ 110...120 (50/60 Hz)	Green <b>XB4BK133G5</b> (ZB4BW0G35 + ZB4BK1333)	0.101/0.223												
	Red <b>XB4BK134G5</b> (ZB4BW0G45 + ZB4BK1343)	0.101/0.223												
	Orange <b>XB4BK135G5</b> (ZB4BW0G55 + ZB4BK1353)	0.101/0.223												
~ 230...240 (50/60 Hz)	Green <b>XB4BK133M5</b> (ZB4BW0M35 + ZB4BK1333)	0.101/0.223												
	Red <b>XB4BK134M5</b> (ZB4BW0M45 + ZB4BK1343)	0.101/0.223												
	Orange <b>XB4BK135M5</b> (ZB4BW0M55 + ZB4BK1353)	0.101/0.223												

(1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.


Assembly of other products using:  
combined sub-assemblies: see page 38  
accessories: see page 50

# Control and signaling units Ø 22

## Harmony XB4, metal

Illuminated selector switches with standard handle,  
with integral LED

### Illuminated selector switches with standard handle, with integral LED (continued) (1)

Shape of head	Type of operator	Positions		Color of handle	Reference	Weight kg/lb	
		Number	Type				
<b>Heads only (2)</b>							
	Standard handle	2-position 90°	Stay put		White	<b>ZB4BK1213</b>	0.036/0.079
					Green	<b>ZB4BK1233</b>	0.036/0.079
					Red	<b>ZB4BK1243</b>	0.036/0.079
					Orange	<b>ZB4BK1253</b>	0.036/0.079
					Blue	<b>ZB4BK1263</b>	0.036/0.079
					Blue	<b>ZB4BK1263</b>	0.036/0.079
		Spring return from right to left		White	<b>ZB4BK1413</b>	0.037/0.082	
				Green	<b>ZB4BK1433</b>	0.037/0.082	
				Red	<b>ZB4BK1443</b>	0.037/0.082	
				Orange	<b>ZB4BK1453</b>	0.037/0.082	
				Blue	<b>ZB4BK1463</b>	0.037/0.082	
				Blue	<b>ZB4BK1463</b>	0.037/0.082	
		3-position ± 45°	Stay put		White	<b>ZB4BK1313</b>	0.036/0.079
					Green	<b>ZB4BK1333</b>	0.036/0.079
					Red	<b>ZB4BK1343</b>	0.036/0.079
					Orange	<b>ZB4BK1353</b>	0.036/0.079
					Blue	<b>ZB4BK1363</b>	0.036/0.079
					Blue	<b>ZB4BK1363</b>	0.036/0.079
Spring return to centre		White	<b>ZB4BK1513</b>	0.036/0.079			
		Green	<b>ZB4BK1533</b>	0.036/0.079			
		Red	<b>ZB4BK1543</b>	0.036/0.079			
		Orange	<b>ZB4BK1553</b>	0.036/0.079			
		Blue	<b>ZB4BK1563</b>	0.036/0.079			
		Blue	<b>ZB4BK1563</b>	0.036/0.079			
Spring return from right to centre		White	<b>ZB4BK1813</b>	0.036/0.079			
		Green	<b>ZB4BK1833</b>	0.036/0.079			
		Red	<b>ZB4BK1843</b>	0.036/0.079			
		Orange	<b>ZB4BK1853</b>	0.036/0.079			
		Blue	<b>ZB4BK1863</b>	0.036/0.079			
		Blue	<b>ZB4BK1863</b>	0.036/0.079			
Spring return from left to centre		White	<b>ZB4BK1713</b>	0.036/0.079			
		Green	<b>ZB4BK1733</b>	0.036/0.079			
		Red	<b>ZB4BK1743</b>	0.036/0.079			
		Orange	<b>ZB4BK1753</b>	0.036/0.079			
		Blue	<b>ZB4BK1763</b>	0.036/0.079			
		Blue	<b>ZB4BK1763</b>	0.036/0.079			

107700



ZB4BK1343

### Heads with black metal bezel

To order, add a figure 7 to the references selected from above.  
Example: **ZB4BK1213** becomes **ZB4BK12137**.

- (1) Recommended maximum number of contacts constituting the body (fixing collar and contact) associated with the head, see page 12.  
(2) Only for use with bodies comprising a light source with integral LED.


Assembly of other products using:  
body/light assemblies: see page 46  
accessories: see page 50




XB4BVB5

#### Pilot lights with integral LED

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Supply voltage V	Color	Reference	Weight kg/lb
<b>Complete units</b>				
■ With plain lens				
 <b>Protected LED</b>	~ 24 (50/60 Hz)	White	<b>XB4BVB1</b> (ZB4BVB1 + ZB4BV013)	0.080/0.176
		Green	<b>XB4BVB3</b> (ZB4BVB3 + ZB4BV033)	0.080/0.176
		Red	<b>XB4BVB4</b> (ZB4BVB4 + ZB4BV043)	0.080/0.176
		Orange	<b>XB4BVB5</b> (ZB4BVB5 + ZB4BV053)	0.080/0.176
		Blue	<b>XB4BVB6</b> (ZB4BVB6 + ZB4BV063)	0.080/0.176
		~ 110...120 (50/60 Hz)	White	<b>XB4BVG1</b> (ZB4BVG1 + ZB4BV013)
Green	<b>XB4BVG3</b> (ZB4BVG3 + ZB4BV033)		0.080/0.176	
Red	<b>XB4BVG4</b> (ZB4BVG4 + ZB4BV043)		0.080/0.176	
Orange	<b>XB4BVG5</b> (ZB4BVG5 + ZB4BV053)		0.080/0.176	
Blue	<b>XB4BVG6</b> (ZB4BVG6 + ZB4BV063)		0.080/0.176	
~ 230...240 (50/60 Hz)	White		<b>XB4BVM1</b> (ZB4BVM1 + ZB4BV013)	0.080/0.176
	Green	<b>XB4BVM3</b> (ZB4BVM3 + ZB4BV033)	0.080/0.176	
	Red	<b>XB4BVM4</b> (ZB4BVM4 + ZB4BV043)	0.080/0.176	
	Orange	<b>XB4BVM5</b> (ZB4BVM5 + ZB4BV053)	0.080/0.176	
	Blue	<b>XB4BVM6</b> (ZB4BVM6 + ZB4BV063)	0.080/0.176	


#### Heads only (1)

Shape of head	For use with body comprising light source type	Color of lens	Reference	Weight kg/lb
■ With plain lens				
 <b>Protected LED</b>	Integral LED only	White	<b>ZB4BV013</b>	0.026/0.057
		Green	<b>ZB4BV033</b>	0.026/0.057
		Red	<b>ZB4BV043</b>	0.026/0.057
		Orange	<b>ZB4BV053</b>	0.026/0.057
		Blue	<b>ZB4BV063</b>	0.026/0.057
		5 colors (2) (3)	<b>ZB4BV003</b>	0.026/0.057

#### ■ With plain lens, for insertion of legend (3)

 <b>Protected LED</b>	Integral LED only	White	<b>ZB4BV013E</b>	0.026/0.057
		Green	<b>ZB4BV033E</b>	0.026/0.057
		Red	<b>ZB4BV043E</b>	0.026/0.057
		Orange	<b>ZB4BV053E</b>	0.026/0.057
		Blue	<b>ZB4BV063E</b>	0.026/0.057

#### ■ With grooved lens (4)

 <b>Protected LED</b>	Integral LED only	White	<b>ZB4BV013S</b>	0.026/0.057
		Green	<b>ZB4BV033S</b>	0.026/0.057
		Red	<b>ZB4BV043S</b>	0.026/0.057
		Orange	<b>ZB4BV053S</b>	0.026/0.057
		Blue	<b>ZB4BV063S</b>	0.026/0.057



ZB4BV063



ZB4BV043S

(1) Only for use with bodies comprising a light source with integral LED.

(2) Head supplied with 5 different colored lenses (White, Green, Red, Orange, Blue) not fitted, for insertion of legend.


(3) For legend ordering information: see page 57.

(4) For use in bright ambient light conditions (for example, outdoors in sunlight).

Assembly of other products using:  
body/light assemblies: see page 47  
accessories: see page 50

#### Pilot lights with integral LED and transformer (1.2 VA, 24 V secondary)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Shape of head	Supply voltage V	Color	Reference (1)	Weight kg/lb
<b>Complete units - With plain lens</b>				
	~ 400 - 50 Hz (1)	White	<b>XB4BV5B1</b>	0.172/0.379
		Green	<b>XB4BV5B3</b>	0.172/0.379
		Red	<b>XB4BV5B4</b>	0.172/0.379
		Orange	<b>XB4BV5B5</b>	0.172/0.379
		Blue	<b>XB4BV5B6</b>	0.172/0.379

PF612644




XB4BV5B1

Protected  
LED

#### Pilot lights with BA 9s base fitting, with plain or grooved lens

Screw clamp terminal connections (Schneider Electric anti-loosening system)


Shape of head	Supply voltage V	Color	Reference	Weight kg/lb
<b>Complete units - With plain lens</b>				
■ Direct supply, for BA 9s bulb, U ≤ 250 V, 2.4 W max (bulb not included)				
	≤ 250	White	<b>XB4BV61</b> (ZB4BV6 + ZB4BV01)	0.075/0.165
		Green	<b>XB4BV63</b> (ZB4BV6 + ZB4BV03)	0.075/0.165
		Red	<b>XB4BV64</b> (ZB4BV6 + ZB4BV04)	0.075/0.165
		Orange	<b>XB4BV65</b> (ZB4BV6 + ZB4BV05)	0.075/0.165

101178



XB4BV64

■ Via integral transformer, 1.2 VA, 6 V secondary, with BA 9s incandescent bulb (included)


	~ 110...120 - 50/60 Hz	White	<b>XB4BV31</b> (ZB4BV3 + ZB4BV01)	0.152/0.335
		Green	<b>XB4BV33</b> (ZB4BV3 + ZB4BV03)	0.152/0.335
		Red	<b>XB4BV34</b> (ZB4BV3 + ZB4BV04)	0.152/0.335
		Orange	<b>XB4BV35</b> (ZB4BV3 + ZB4BV05)	0.152/0.335
	~ 230 - 50 Hz ~ 220...240 - 60 Hz	White	<b>XB4BV41</b> (ZB4BV4 + ZB4BV01)	0.152/0.335
		Green	<b>XB4BV43</b> (ZB4BV4 + ZB4BV03)	0.152/0.335
		Red	<b>XB4BV44</b> (ZB4BV4 + ZB4BV04)	0.152/0.335
		Orange	<b>XB4BV45</b> (ZB4BV4 + ZB4BV05)	0.152/0.335

PF512645



XB4BV33

#### Heads only (2)


Shape of head	For use with body comprising light source type	Color of lens	Reference	Weight kg/lb
■ With plain lens				
	<b>With BA 9s base fitting</b>	White	<b>ZB4BV01</b>	0.027/0.060
		Green	<b>ZB4BV03</b>	0.027/0.060
		Red	<b>ZB4BV04</b>	0.027/0.060
		Orange	<b>ZB4BV05</b>	0.027/0.060
		Blue	<b>ZB4BV06</b>	0.027/0.060
		Clear	<b>ZB4BV07</b>	0.027/0.060

101234



ZB4BV04

■ With grooved lens (3)

	<b>With BA 9s base fitting</b>	White	<b>ZB4BV01S</b>	0.027/0.060
		Green	<b>ZB4BV03S</b>	0.027/0.060
		Red	<b>ZB4BV04S</b>	0.027/0.060
		Orange	<b>ZB4BV05S</b>	0.027/0.060
		Blue	<b>ZB4BV06S</b>	0.027/0.060
		Clear	<b>ZB4BV07S</b>	0.027/0.060

PG113109



ZB4BV06S

(1) For order ~ 440...460 V - 60 Hz transformer blocks, please replace "5" in the reference by "8". Example: **XB4BV5B1** becomes **XB4BV8B1**. To order ~ 550...600 V - 60 Hz blocks, please replace "5" by "9". Example: **XB4BV5B1** becomes **XB4BV9B1**.

(2) Only for use with bodies comprising a light source with BA 9s base fitting (incandescent, neon or LED).

(3) For use in bright ambient light conditions (for example, outdoors in sunlight).

Assembly of other products using:  
body/contact assemblies: see page 38  
accessories: see page 50



XB4BA821



Manual overload reset pushbuttons					
Shape of head	Travel Ø (mm)/in.	Actuation distance Ø (mm)/in.	Color	Reference	Weight kg/lb
With flush push	10/0.394	6...16/0.236...0.630	Black	<b>XB4BA821</b>	0.037/0.082
			Red	<b>XB4BA841</b>	0.037/0.082
			Blue	<b>XB4BA861</b>	0.037/0.082
	16...26/0.630...1.024	30...130/1.181...5.118	Black	<b>XB4BA822</b>	0.038/0.084
			Red	<b>XB4BA842</b>	0.038/0.084
			Blue	<b>XB4BA862</b>	0.038/0.084
14/0.551	30...130/1.181...5.118	Black	<b>XB4BA921</b>	0.058/0.128	
		Red	<b>XB4BA941</b>	0.058/0.128	
		Blue	<b>XB4BA961</b>	0.058/0.128	
130...257/5.118...10.118	30...130/1.181...5.118	Black	<b>XB4BA922</b>	0.071/0.157	
		Red	<b>XB4BA942</b>	0.071/0.157	
		Blue	<b>XB4BA962</b>	0.071/0.157	



ZB4BD912



Heads and mounting base for potentiometer (1)				
Shape of head	Description	For use with	Reference	Weight kg/lb
	For potentiometer with shaft length Ø 45 to 50 mm/1.772 to 1.968 in.	Ø 6 mm / 0.236 in. shaft	<b>ZB4BD912</b>	0.080/0.176
		Ø 6.35 mm / 0.250 in. shaft	<b>ZB4BD922</b>	0.080/0.176

### Hour counters

Characteristics	Supply voltage V	Reference	Weight kg/lb
Indication 0...9999.9	≈ 12...24 - 50/60 Hz	<b>XB5DSB</b>	0.045/0.099
	~ 120 - 60 Hz	<b>XB5DSG</b>	0.045/0.099
	~ 230...240 - 50 Hz	<b>XB5DSM</b>	0.045/0.099



XB5DSB



XB5KS

### Annunciators (IP 40 NEMA 1)

85 db buzzer: 4 kHz, with continuous or intermittent operation	≈ 24 - 50/60 Hz	<b>XB5KSB</b>	0.035/0.077
	~ 120 - 50/60 Hz	<b>XB5KSG</b>	0.035/0.077
	~ 230...240 - 50 Hz	<b>XB5KSM</b>	0.035/0.077



XB5DT1S

### Fuse carrier

Description	For use with	Reference	Weight kg/lb
Fuse carrier	5 x 20 mm/0.197 x 0.787 in. fuse 6.3 A - 250 V	<b>XB5DT1S</b>	0.022/0.049

(1) Potentiometer not included.

Assembly of other products using accessories: see page 50

## Control and signaling units Ø 22

Harmony XB4, metal

Specific functions

Joystick controllers, wobblesticks

101189



XD4PA12

103074



ZD4PA103

103072



ZD4PA203

103073



ZD4PA12

103487



ZB4BB2

### Joystick controllers (with Ø 54 mm/2.126 in. long operating shaft) (1) Screw clamp terminal connections (Schneider Electric anti-loosening system)

Description	Operation	Spring return to zero position	Reference	Weight kg/lb
<b>Complete products</b>				
2-direction	1 notch 1 N/O contact per direction	Without	<b>XD4PA12</b>	0.116/0.256
		With	<b>XD4PA22</b>	0.116/0.256
4-direction	1 notch 1 N/O contact per direction	Without	<b>XD4PA14</b>	0.133/0.293
		With	<b>XD4PA24</b>	0.133/0.293

### Sub-assemblies for joystick controllers

Description	Functions	Reference	Weight kg/lb
Complete body/contact assemblies	2-direction	<b>ZD4PA103</b>	0.049/0.108
	4-direction	<b>ZD4PA203</b>	0.058/0.128
Complete head assemblies with operating shaft	2-direction, stay put	<b>ZD4PA12</b>	0.022/0.049
	2-direction, spring return to zero position	<b>ZD4PA22</b>	0.022/0.049
	4-direction, stay put	<b>ZD4PA14</b>	0.022/0.049
	4-direction, spring return to zero position	<b>ZD4PA24</b>	0.022/0.049

Legends Ø 30 x 48 mm/ 1.181 x 1.890 in. for engraving	2-direction	Black one side Red reverse	<b>ZBG2201</b>	0.001/0.002
		White one side Yellow reverse	<b>ZBG2401</b>	0.001/0.002
Legends Ø 48 x 48 mm/ 1.890 x 1.890 in. for engraving	4-direction	Black one side Red reverse	<b>ZBG4201</b>	0.002/0.004
		White one side Yellow reverse	<b>ZBG4401</b>	0.002/0.004

### Wobblestick heads

Shape of head	For use with	Color	Reference	Weight kg/lb
	Omnidirectional, spring return	Black	<b>ZB4BB2</b>	0.058/0.128
		Red	<b>ZB4BB4</b>	0.058/0.128

**Other versions** Joystick controllers and complete body/contact assemblies for joystick controllers with Faston connector terminals (Ø 6.35 or 2 x 2.8 mm/0.250 or 2 x 0.110 in.). Please consult our Customer Care Centre.



(1) Must not be used with standard contact blocks **ZBE10** (single) or **ZBE20** (double).





To combine with heads, see pages 14 to 36



Body/fixing collar			
For use with	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	10	ZB4BZ009	0.038/0.084

**Contact functions (1)**  
**Screw clamp terminal connections (Schneider Electric anti-loosening system)**

Contacts for standard applications						
Description	Type of contact			Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	Single	1	–	5	ZBE101	0.011/0.024
		–	1	5	ZBE102	0.011/0.024
	Double	2	–	5	ZBE203	0.020/0.044
		–	2	5	ZBE204	0.020/0.044
	Single with body/fixing collar	1	1	5	ZBE205	0.020/0.044
		–	1	1	1	ZB4BZ101
	Single with body/fixing collar	–	1	1	ZB4BZ102	0.053/0.117
		2	–	1	ZB4BZ103	0.062/0.137
	Single with body/fixing collar	–	2	1	ZB4BZ104	0.062/0.137
		1	1	1	ZB4BZ105	0.062/0.137
		1	2	1	ZB4BZ141	0.072/0.159

Contacts for specific applications								
Application	Type of contact	Description			Sold in lots of	Unit reference	Weight kg/lb	
Low power switching	Single	Standard	1	–	5	ZBE1016	0.012/0.026	
		–	1	5	ZBE1026	0.012/0.026		
	Dusty environment (2) (IP 5X, 50 µm dust)	1	–	5	ZBE1016P	0.012/0.026		
		–	1	5	ZBE1026P	0.012/0.026		
Staggered contacts	Single	Early make N/O	1	–	5	ZBE201	0.011/0.024	
		Late break N/C	–	1	5	ZBE202	0.011/0.024	
	Single with body/fixing collar	Overlapping N/O+N/C		1	1	5	ZB4BZ106	0.062/0.137
		Staggered N/O+N/O		2	–	5	ZB4BZ107	0.062/0.137
High power switching	Single	Standard (3)	1	–	1	ZBE501	0.020/0.044	
			–	1	1	ZBE502	0.020/0.044	
			2	–	1	ZBE503	0.032/0.071	
			–	2	1	ZBE504	0.032/0.071	
			1	1	1	ZBE505	0.032/0.071	
Additional contact blocks for high power switching	Single	Standard (4)	1	–	1	ZB2BE101	0.020/0.044	
			–	1	1	ZB2BE102	0.020/0.044	

Clip-on legend holder, sheet of blank legends and labelling software			
Description	Sold in lots of	Unit reference	Weight kg/lb
Clip-on legend-holder for electrical blocks with screw clamp terminal connections (5). For identification of an XB4B control or signaling unit	10	ZBZ001	0.001/0.002
Sheet of 50 blank legends for legend holder ZBZ001	10	ZBY001	0.023/0.051
“SIS Label” labelling software for legend design (ZBY001 legends) (for design of legends in English, French, German, Italian, Spanish)	1	XY2U	0.100/0.220

- (1) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy the first 2 rows). Maximum number of contacts is specified on page 12.
- (2) It is not possible to fit an additional contact block on the back of these contact blocks.
- (3) It is not possible to use these contacts with light blocks.
- (4) To be fitted on the back of ZBE50● contacts.
- (5) This legend holder is not compatible with high power switching contacts.

To combine with heads, see page 18

101288



ZBVB●

## Light blocks with screw clamp terminal connections (Schneider Electric anti-loosening system)

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
<b>Integral LED</b> (to combine with heads for integral LED)	~ 12 (50/60 Hz)	White	5	ZBVJ1	0.017/0.037
		Green	5	ZBVJ3	0.017/0.037
		Red	5	ZBVJ4	0.017/0.037
		Orange	5	ZBVJ5	0.017/0.037
		Blue	5	ZBVJ6	0.017/0.037
	~ 24 (50/60 Hz)	White	5	ZBVB1	0.017/0.037
		Green	5	ZBVB3	0.017/0.037
		Red	5	ZBVB4	0.017/0.037
		Orange	5	ZBVB5	0.017/0.037
		Blue	5	ZBVB6	0.017/0.037
	~ 24...120 (50/60 Hz)	White	5	ZBVBG1	0.017/0.037
		Green	5	ZBVBG3	0.017/0.037
		Red	5	ZBVBG4	0.017/0.037
		Orange	5	ZBVBG5	0.017/0.037
		Blue	5	ZBVBG6	0.017/0.037
	~ 110...120 (50/60 Hz)	White	5	ZBVG1	0.017/0.037
		Green	5	ZBVG3	0.017/0.037
		Red	5	ZBVG4	0.017/0.037
		Orange	5	ZBVG5	0.017/0.037
		Blue	5	ZBVG6	0.017/0.037
	~ 230...240 (50/60 Hz)	White	5	ZBVM1	0.017/0.037
		Green	5	ZBVM3	0.017/0.037
		Red	5	ZBVM4	0.017/0.037
		Orange	5	ZBVM5	0.017/0.037
		Blue	5	ZBVM6	0.017/0.037

Protected LED

PF080705



ZBV5B

## Flashing light blocks with screw clamp terminal connections (Schneider Electric anti-loosening system)

<b>Integral LED</b> (to combine with heads for integral LED)	~ 24 (50/60 Hz)	White	5	ZBV18B1	0.017/0.037
		Green	5	ZBV18B3	0.017/0.037
		Red	5	ZBV18B4	0.017/0.037
		Orange	5	ZBV18B5	0.017/0.037
		Blue	5	ZBV18B6	0.017/0.037
	~ 110...120 (50/60 Hz)	White	5	ZBV18G1	0.017/0.037
		Green	5	ZBV18G3	0.017/0.037
		Red	5	ZBV18G4	0.017/0.037
		Orange	5	ZBV18G5	0.017/0.037
		Blue	5	ZBV18G6	0.017/0.037
	~ 230...240 (50/60 Hz)	White	5	ZBV18M1	0.017/0.037
		Green	5	ZBV18M3	0.017/0.037
		Red	5	ZBV18M4	0.017/0.037
		Orange	5	ZBV18M5	0.017/0.037
		Blue	5	ZBV18M6	0.017/0.037

Protected LED

121461



ZBZG156

121463



ZBZM156

## Transformer blocks for 24 V light blocks (1)

For use with	Supply voltage V	Description	Référence	Weight kg/lb
Light blocks with integral LED	~ 400 V - 50 Hz	Transformer 400 V - 24 V ~	ZBV5B (2)	0.090/0.198

## Blocks for "test light" function

Light blocks	~ 12 and 24 ~ 24...120	Single module, 1 connecting wire	ZBZG156 (3)	0.010/0.022
Light blocks with integral LED	~ 48...230	Double module, with connecting wires	ZBZM156 (4)	0.010/0.022

## LED suppressors

For use with	Supply voltage V	Level of protection	Reference	Weight kg/lb
Light blocks with integral LED fitted with screw clamp terminal connections	~ 120	25...120 VA	ZBZVG	0.010/0.022
	~ 230	30...230 VA	ZBZVM	0.010/0.022

105079



ZBZV●

(1) To be used with 2 dummy contact blocks ZBE000.

(2) To order ~ 440...460 V - 60 Hz transformer blocks, please replace "5" in the reference by "8": ZBV5B becomes ZBV8B. To order ~ 550...600 V - 60 Hz transformer blocks, please replace "5" by "9": ZBV5B becomes ZBV9B.

(3) Block for use with ~ light blocks with integral LED types ZBVJ●, ZBVB●, ZVBVG● or with direct supply light block for BA 9s bulb, ZBV6.

(4) Block for use ~ light blocks integral LED types ZBVG●, ZBVM●, see connection on our website www.schneider-electric.com.

To combine with heads, see pages 14 to 36

10191



ZB4BZ009

PF10777



ZBE1015

PF10779




ZB4BZ1015

PF080711



ZBVB35

814262



ZBZ001

540548



XBY2U

#### Body/fixing collar

For use with	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	10	ZB4BZ009	0.038/0.084

#### Contact functions

##### Spring clamp terminal connections (1)

##### Contacts for standard applications

Description	Type of contact	Terminal connection		Sold in lots of	Unit reference	Weight kg/lb
		N/O	N/C			
Contact blocks	Single	1	–	4	ZBE1015	0.011/0.024
		–	1	4	ZBE1025	0.011/0.024
Contact blocks	Single with body/fixing collar	1	–	1	ZB4BZ1015	0.053/0.117
		–	1	1	ZB4BZ1025	0.053/0.117
		2	–	1	ZB4BZ1035	0.062/0.137
		–	2	1	ZB4BZ1045	0.062/0.137
		1	1	1	ZB4BZ1055	0.062/0.137

#### Light blocks

##### Spring clamp terminal connections (1)

Description	Supply voltage V	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	~ 12 (50/60 Hz)	White	4	ZBVJ15	0.016/0.035
		Green	4	ZBVJ35	0.016/0.035
		Red	4	ZBVJ45	0.016/0.035
		Orange	4	ZBVJ55	0.016/0.035
		Blue	4	ZBVJ65	0.016/0.035
		Protected LED	~ 24 (50/60 Hz)	White	4
Green	4			ZBVB35	0.016/0.035
Red	4			ZBVB45	0.016/0.035
Orange	4			ZBVB55	0.016/0.035
Blue	4			ZBVB65	0.016/0.035
Integral LED + body/fixing collar	~ 110...120 (50/60 Hz)			White	4
		Green	4	ZBVG35	0.016/0.035
		Red	4	ZBVG45	0.016/0.035
		Orange	4	ZBVG55	0.016/0.035
		Blue	4	ZBVG65	0.016/0.035
		Integral LED + body/fixing collar	~ 230...240 (50/60 Hz)	White	4
Green	4			ZBVM35	0.016/0.035
Red	4			ZBVM45	0.016/0.035
Orange	4			ZBVM55	0.016/0.035
Blue	4			ZBVM65	0.016/0.035
Integral LED + body/fixing collar	~ 110...120 (50/60 Hz)			Green	4
		Red	4	ZB4BVG45	0.053/0.117

#### Sheet of 50 blank legends

For use with	Sold in lots of	Unit reference	Weight kg/lb
Legend holder ZBZ001	10	ZBY001	0.023/0.051

#### “SIS Label” labelling software (for legends ZBY001)

For legend design	Sold in lots of	Unit reference	Weight kg/lb
for English, French, German, Italian, Spanish	10	XBY2U	0.100/0.220

(1) It is not possible to fit an additional block on the back of these contact or light blocks.

To combine with heads, see pages 14 to 36



ZB4BZ009



ZB4BZ079 + ZB4BZ009



ZBZ01



ZBE701



ZBE702



ZBVB07

#### Body/fixing collar and accessories specifically for printed circuit board mounting (1)

##### Accessories required when using adaptor (socket) ZBZ010

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Body/fixing collar	Electrical block (contact or light)	10	ZB4BZ009	0.006/0.013
Fixing collar/pillar	Printed circuit board support (fixing screw ZBZ006 to be ordered separately)	10	ZB4BZ079	0.003/0.007
Fixing screw for printed circuit board	Fixing collar/pillar ZB4BZ079	10	ZBZ006	0.011/0.024

##### Adapter (socket) (1)

For use with	Thickness of printed circuit board Ø (mm)/in.	Sold in lots of	Unit reference	Weight kg/lb
Electrical block (contact or light)	1.6 ± 0.2/0.063 ± 0.008	10	ZBZ010	0.008/0.018
	2.2 ± 0.2/0.087 ± 0.008	10	ZBZ011	0.008/0.018
	3.2 ± 0.2/0.126 ± 0.008	10	ZBZ012	0.008/0.018

#### Contact functions (1)

##### Contacts for standard applications

Description	Type of contact	Symbol		Sold in lots of	Unit reference	Weight kg/lb
		N/O	N/C			
Contact blocks	Single	1	–	5	ZBE701	0.011/0.024
		–	1	5	ZBE702	0.011/0.024

##### Contacts for specific applications

Application	Type of contact	Symbol		Sold in lots of	Unit reference	Weight kg/lb
		N/O	N/C			
Low power switching	Single	1	–	5	ZBE7016	0.012/0.026
		–	1	5	ZBE7026	0.012/0.026

#### Light blocks (1)

Description	Supply voltage V	Color of LED	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	≈ 24 (50/60 Hz)	White	5	ZBVB17	0.004/0.009
		Green	5	ZBVB37	0.004/0.009
		Red	5	ZBVB47	0.004/0.009
		Orange	5	ZBVB57	0.004/0.009
		Blue	5	ZBVB67	0.004/0.009

(1) For details of support drilling and of printed circuit board, see our website [www.schneider-electric.com](http://www.schneider-electric.com).



To combine with heads, see pages 14 to 36



ZBE1023




ZBE2043




ZB4BZ1043



ZBE5043



ZBZ001



XBY2U

#### Contact functions (1)

Faston connectors (Ø 6.35 or 2 x 2.8 mm/0.250 or 2 x 0.110 in.) (Schneider Electric anti-loosening system)

#### Contacts for standard applications

Description	Type of contact			Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	Single	1	–	5	ZBE1013	0.011/0.024
		–	1	5	ZBE1023	0.011/0.024
	Double	2	–	5	ZBE2033	0.020/0.044
		–	2	5	ZBE2043	0.020/0.044
		1	1	5	ZBE2053	0.020/0.044
	Single with body/fixing collar	1	–	1	ZB4BZ1013 (2)	0.053/0.117
–		1	1	ZB4BZ1023 (2)	0.053/0.117	
2		–	1	ZB4BZ1033	0.062/0.137	
–		2	1	ZB4BZ1043	0.062/0.137	
		1	1	1	ZB4BZ1053	0.062/0.137

#### Contacts for specific applications

Application	Type of contact	Description			Sold in lots of	Unit reference	Weight kg/lb
Low power switching	Single	Standard	1	–	5	ZBE10163 (2)	0.012/0.026
			–	1	5	ZBE10263 (2)	0.012/0.026
		Dusty environments (3) (IP 5X, 50 µm dust)	1	–	5	ZBE1016P3 (2)	0.012/0.026
			–	1	5	ZBE1026P3 (2)	0.012/0.026
Staggered contacts	Single	Early make	1	–	5	ZBE2013 (2)	0.011/0.024
		Late break	–	1	5	ZBE2023 (2)	0.011/0.024
		N/C					
High power switching	Single	Standard (4)	1	–	1	ZBE5013	0.021/0.046
			–	1	1	ZBE5023	0.021/0.046
			2	–	1	ZBE5033	0.033/0.073
			–	2	1	ZBE5043	0.033/0.073
			1	1	1	ZBE5053	0.033/0.073

#### Clip-on legend holder for electrical blocks with screw clamp terminal connections (5)

For use with	Sold in lots of	Unit reference	Weight kg/lb
Identification of an XB4B control or signaling unit	10	ZBZ001	0.001/0.002

#### Sheet of 50 blank legends

Legend holder ZBZ001	10	ZBY001	0.023/0.051
----------------------	----	--------	-------------

#### “SIS Label” labelling software (for legends ZBY001)

For legend design for English, French, German, Italian, Spanish	1	XBY2U	0.100/0.220
---	---	-------	-------------

- (1) The contact blocks enable variable composition of body/contact assemblies. Maximum number of rows possible: 3. Either 3 rows of 3 single contacts or 1 row of 3 double contacts + 1 row of 3 single contacts (double contacts occupy the first 2 rows).
- (2) To order products with screw clamp terminal connections for lugs, replace the 3 at the end of the reference with a 9. Example: ZBE1013 becomes ZBE1019.
- (3) It is not possible to fit an additional contact block on the back of these contact blocks.
- (4) It is not possible to use these contacts with light blocks.
- (5) This legend holder is not compatible with high power switching contact blocks.

To combine with heads, see pages 14 to 36



ZB4BZ009



ZBE1014



ZBE1024




ZB4BZ1014



ZB4BZ1024



ZBVB14



APE1C2250

Body/fixing collar				
For use with	Sold in lots of	Unit reference	Weight kg/lb	
Electrical block (contact or light)	10	ZB4BZ009	0.038/0.084	

**Contact functions**  
**Plug-in connector (1)**  
**Contacts for standard applications**

Description	Type of contact	N/O	N/C	Sold in lots of	Unit reference	Weight kg/lb
Contact blocks	Single	1	–	5	ZBE1014	0.011/0.024
		–	1	5	ZBE1024	0.011/0.024
Contact blocks	Single with body/fixing collar	1	–	1	ZB4BZ1014	0.050/0.110
		–	1	1	ZB4BZ1024	0.050/0.110
		2	–	1	ZB4BZ1034	0.058/0.128
		–	2	1	ZB4BZ1044	0.058/0.128
		1	1	1	ZB4BZ1054	0.058/0.128
		1	2	1	ZB4BZ1414	0.064/0.141

**Light blocks**  
**Plug-in connector**

Description	Supply voltage (V)	Color of light source	Sold in lots of	Unit reference	Weight kg/lb
Integral LED (to combine with heads for integral LED)	≈ 24 (50/60 Hz)	White	5	ZBVB14	0.016/0.035
		Green	5	ZBVB34	0.016/0.035
		Red	5	ZBVB44	0.016/0.035
		Orange	5	ZBVB54	0.016/0.035
		Blue	5	ZBVB64	0.016/0.035
		Integral LED (to combine with heads for integral LED)	≈ 110...120 (50/60 Hz)	White	5
Green	5			ZBVG34	0.016/0.035
Red	5			ZBVG44	0.016/0.035
Orange	5			ZBVG54	0.016/0.035
Blue	5			ZBVG64	0.016/0.035
Integral LED (to combine with heads for integral LED)	≈ 230...240 (50/60 Hz)			White	5
		Green	5	ZBVM34	0.016/0.035
		Red	5	ZBVM44	0.016/0.035
		Orange	5	ZBVM54	0.016/0.035
		Blue	5	ZBVM64	0.016/0.035

**Connecting cables and connector**

Description	Number of connectors	Wire c.s.a. mm <sup>2</sup> /AWG	Length Ø mm/in.	Sold in lots of	Unit reference	Weight kg/lb
Cables with connectors 2-pin, Ø 5.08 mm/0.200 in. pitch	1	0.75/19	500/19.685	8	APE1C2150	0.120/0.265
	2	0.75/19	500/19.685	8	APE1C2250	0.180/0.397
Spring terminal connector 2-pin, Ø 5.08 mm/0.200 in. pitch	–	0.2 to .5 /25 to 14	–	10	APE1PRE21	0.003/0.007

(1) It is not possible to fit an additional contact block on the back of these contact blocks.

# Control and signaling units Ø 22

Harmony XB4, metal

Body/contact assemblies + light blocks with integral LED

To combine with:  
heads, see pages 17 to 33  
contacts, see page 38



Complete body/contact assemblies and light blocks (1)						
Screw clamp terminal connections (Schneider Electric anti-loosening system)						
Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb
		N/O	N/C			



Direct supply						
Integral LED <b>Protected LED</b>	~ 24 (50/60 Hz)	1	-	White	<b>ZB4BW0B11</b>	0.064/0.141
				Green	<b>ZB4BW0B31</b>	0.064/0.141
				Red	<b>ZB4BW0B41</b>	0.064/0.141
				Orange	<b>ZB4BW0B51</b>	0.064/0.141
				Blue	<b>ZB4BW0B61</b>	0.064/0.141
		-	1	White	<b>ZB4BW0B12</b>	0.064/0.141
				Green	<b>ZB4BW0B32</b>	0.064/0.141
				Red	<b>ZB4BW0B42</b>	0.064/0.141
				Orange	<b>ZB4BW0B52</b>	0.064/0.141
				Blue	<b>ZB4BW0B62</b>	0.064/0.141
	2	-	White	<b>ZB4BW0B13</b>	0.074/0.163	
			Green	<b>ZB4BW0B33</b>	0.074/0.163	
			Red	<b>ZB4BW0B43</b>	0.074/0.163	
			Orange	<b>ZB4BW0B53</b>	0.074/0.163	
			Blue	<b>ZB4BW0B63</b>	0.074/0.163	
	1	1	White	<b>ZB4BW0B15</b>	0.074/0.163	
			Green	<b>ZB4BW0B35</b>	0.074/0.163	
			Red	<b>ZB4BW0B45</b>	0.074/0.163	
			Orange	<b>ZB4BW0B55</b>	0.074/0.163	
			Blue	<b>ZB4BW0B65</b>	0.074/0.163	
~ 110...120 (50/60 Hz)	1	-	White	<b>ZB4BW0G11</b>	0.064/0.141	
			Green	<b>ZB4BW0G31</b>	0.064/0.141	
			Red	<b>ZB4BW0G41</b>	0.064/0.141	
			Orange	<b>ZB4BW0G51</b>	0.064/0.141	
			Blue	<b>ZB4BW0G61</b>	0.064/0.141	
	-	1	White	<b>ZB4BW0G12</b>	0.064/0.141	
			Green	<b>ZB4BW0G32</b>	0.064/0.141	
			Red	<b>ZB4BW0G42</b>	0.064/0.141	
			Orange	<b>ZB4BW0G52</b>	0.064/0.141	
			Blue	<b>ZB4BW0G62</b>	0.064/0.141	
2	-	White	<b>ZB4BW0G13</b>	0.074/0.163		
		Green	<b>ZB4BW0G33</b>	0.074/0.163		
		Red	<b>ZB4BW0G43</b>	0.074/0.163		
		Orange	<b>ZB4BW0G53</b>	0.074/0.163		
		Blue	<b>ZB4BW0G63</b>	0.074/0.163		
1	1	White	<b>ZB4BW0G15</b>	0.074/0.163		
		Green	<b>ZB4BW0G35</b>	0.074/0.163		
		Red	<b>ZB4BW0G45</b>	0.074/0.163		
		Orange	<b>ZB4BW0G55</b>	0.074/0.163		
		Blue	<b>ZB4BW0G65</b>	0.074/0.163		

**Other versions** Complete bodies with Faston connector terminals (Ø 6.35 or 2 x 2.8mm/0.250 or 2 x 0.110 in.). Please consult our Customer Care Centre.

(1) Can be fitted with additional contact blocks: see page 38.

To combine with:  
heads, see pages 17 to 33  
contacts, see page 38


**Complete body/contact assemblies and light blocks (continued) (1)**
**Screw clamp terminal connections (Schneider Electric anti-loosening system)**

Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb
						
<b>Direct supply (continued)</b>						
Integral LED <b>Protected LED</b>	~ 230...240 (50/60 Hz)	1	–	White	<b>ZB4BW0M11</b>	0.064/0.141
				Green	<b>ZB4BW0M31</b>	0.064/0.141
				Red	<b>ZB4BW0M41</b>	0.064/0.141
				Orange	<b>ZB4BW0M51</b>	0.064/0.141
				Blue	<b>ZB4BW0M61</b>	0.064/0.141
	–	1	–	White	<b>ZB4BW0M12</b>	0.064/0.141
				Green	<b>ZB4BW0M32</b>	0.064/0.141
				Red	<b>ZB4BW0M42</b>	0.064/0.141
				Orange	<b>ZB4BW0M52</b>	0.064/0.141
				Blue	<b>ZB4BW0M62</b>	0.064/0.141
2	–	–	White	<b>ZB4BW0M13</b>	0.074/0.163	
			Green	<b>ZB4BW0M33</b>	0.074/0.163	
			Red	<b>ZB4BW0M43</b>	0.074/0.163	
			Orange	<b>ZB4BW0M53</b>	0.074/0.163	
			Blue	<b>ZB4BW0M63</b>	0.074/0.163	
1	1	–	White	<b>ZB4BW0M15</b>	0.074/0.163	
			Green	<b>ZB4BW0M35</b>	0.074/0.163	
			Red	<b>ZB4BW0M45</b>	0.074/0.163	
			Orange	<b>ZB4BW0M55</b>	0.074/0.163	
			Blue	<b>ZB4BW0M65</b>	0.074/0.163	

**Other versions**

Complete bodies with Faston connector terminals (Ø 6.35 or 2 x 2.8mm/0.250 or 2 x 0.110 in.).  
Please consult our Customer Care Centre.

(1) Can be fitted with additional contact blocks, see page 38.

# Control and signaling units Ø 22

## Harmony XB4, metal

### Body/light assemblies for pilot lights with integral LED

To combine with:  
heads, see page 34  
contacts, see page 38



ZB4BV●●

#### Complete light bodies (fixing collar + light block with integral LED)

#### Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED <b>Protected LED</b>	≈ 12 (50/60 Hz)	White	ZB4BVJ1	0.054/0.119
		Green	ZB4BVJ3	0.054/0.119
		Red	ZB4BVJ4	0.054/0.119
		Orange	ZB4BVJ5	0.054/0.119
		Blue	ZB4BVJ6	0.054/0.119
		≈ 24 (1) (50/60 Hz)	White	ZB4BVB1
Green	ZB4BVB3		0.054/0.119	
Red	ZB4BVB4		0.054/0.119	
Orange	ZB4BVB5		0.054/0.119	
Blue	ZB4BVB6		0.054/0.119	
≈ 24...120 (50/60 Hz)	White		ZB4BVBG1	0.054/0.119
	Green	ZB4BVBG3	0.054/0.119	
	Red	ZB4BVBG4	0.054/0.119	
	Orange	ZB4BVBG5	0.054/0.119	
	Blue	ZB4BVBG6	0.054/0.119	
	≈ 110...120 (1) (50/60 Hz)	White	ZB4BVG1	0.054/0.119
Green		ZB4BVG3	0.054/0.119	
Red		ZB4BVG4	0.054/0.119	
Orange		ZB4BVG5	0.054/0.119	
Blue		ZB4BVG6	0.054/0.119	
≈ 230...240 (1) (50/60 Hz)		White	ZB4BVM1	0.054/0.119
	Green	ZB4BVM3	0.054/0.119	
	Red	ZB4BVM4	0.054/0.119	
	Orange	ZB4BVM5	0.054/0.119	
	Blue	ZB4BVM6	0.054/0.119	

(1) Complete bodies with Faston connector terminals (Ø 6.35 or 2 x 2.8mm/0.250 or 2 x 0.110 in.), see page 42.

# Control and signaling units Ø 22

## Harmony XB4, metal

### Body/light assemblies for pilot lights with integral LED

To combine with:  
heads, see page 34  
contacts, see page 38

PF512556



ZB4BVB●156

#### Complete light bodies with 3-terminal "test" function

(fixing collar + light block with integral LED + pre-wired block for "test light" function)  
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED <b>Protected LED</b>	≈ 24 (1) (50/60 Hz)	White	<b>ZB4BVB1156</b>	0.054/0.119
		Green	<b>ZB4BVB3156</b>	0.054/0.119
		Red	<b>ZB4BVB4156</b>	0.054/0.119
		Orange	<b>ZB4BVB5156</b>	0.054/0.119
		Blue	<b>ZB4BVB6156</b>	0.054/0.119

#### Complete bodies with flashing pilot light

(fixing collar + light block with integral LED)  
Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
Integral LED <b>Protected LED</b>	≈ 24 (50/60 Hz)	White	<b>ZB4BV18B1</b>	0.054/0.119
		Green	<b>ZB4BV18B3</b>	0.054/0.119
		Red	<b>ZB4BV18B4</b>	0.054/0.119
		Orange	<b>ZB4BV18B5</b>	0.054/0.119
		Blue	<b>ZB4BV18B6</b>	0.054/0.119
		White	<b>ZB4BV18G1</b>	0.054/0.119
	≈ 110...120 (50/60 Hz)	Green	<b>ZB4BV18G3</b>	0.054/0.119
		Red	<b>ZB4BV18G4</b>	0.054/0.119
		Orange	<b>ZB4BV18G5</b>	0.054/0.119
		Blue	<b>ZB4BV18G6</b>	0.054/0.119
		White	<b>ZB4BV18M1</b>	0.054/0.119
		≈ 230...240 (50/60 Hz)	Green	<b>ZB4BV18M3</b>
	Red		<b>ZB4BV18M4</b>	0.054/0.119
	Orange		<b>ZB4BV18M5</b>	0.054/0.119
	Blue		<b>ZB4BV18M6</b>	0.054/0.119



(1) For a ~ 120 or 230 V supply, use complete body **ZB4BVG●** or **ZB4BVM●** with block for "test light" function type **ZBZM156**, see page 46 and 39.

To combine with:  
heads, see page 19  
contacts, see page 38

#### Complete body/contact assemblies and light blocks <sup>(1)</sup>

For bulb with BA 9s base fitting (incandescent, neon or LED)

Screw clamp terminal connections (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Type of contact		Color of light source	Reference	Weight kg/lb
		 N/O	 N/C			
<b>Direct supply</b>						
BA9s base fitting bulb, 2.4 W max, not included (2)	≤ 250	1	–	–	<b>ZB4BW061</b>	0.063/0.139
		–	1	–	<b>ZB4BW062</b>	0.063/0.139
		2	–	–	<b>ZB4BW063</b>	0.073/0.161
		1	1	–	<b>ZB4BW065</b>	0.073/0.161
<b>Supply via integral transformer (1.2 VA, 6 V secondary)</b>						
BA9s base fitting incandescent bulb, included	~ 110...120 50/60 Hz	1	–	–	<b>ZB4BW031</b>	0.141/0.311
		1	1	–	<b>ZB4BW035</b>	0.151/0.333
	~ 230 50 Hz	1	–	–	<b>ZB4BW041</b>	0.141/0.311
		1	1	–	<b>ZB4BW045</b>	0.151/0.333
	~ 220...240 60 Hz	1	–	–	<b>ZB4BW051</b>	0.141/0.311
		1	1	–	<b>ZB4BW055</b>	0.151/0.333
	~ 110...120 50/60 Hz	1	1	White	<b>ZB4BW03D15</b>	0.151/0.333
				Green	<b>ZB4BW03D35</b>	0.151/0.333
				Red	<b>ZB4BW03D45</b>	0.151/0.333
				Orange	<b>ZB4BW03D55</b>	0.151/0.333
				Blue	<b>ZB4BW03D65</b>	0.151/0.333
	~ 230 50 Hz ~ 220...240 60 Hz	1	1	White	<b>ZB4BW04D15</b>	0.151/0.333
Green				<b>ZB4BW04D35</b>	0.151/0.333	
Red				<b>ZB4BW04D45</b>	0.151/0.333	
Orange				<b>ZB4BW04D55</b>	0.151/0.333	
Blue				<b>ZB4BW04D65</b>	0.151/0.333	
~ 400 50/60 Hz	1	1	White	<b>ZB4BW05D15</b>	0.152/0.335	
			Green	<b>ZB4BW05D35</b>	0.152/0.335	
			Red	<b>ZB4BW05D45</b>	0.152/0.335	
			Orange	<b>ZB4BW05D55</b>	0.152/0.335	
			Blue	<b>ZB4BW05D65</b>	0.152/0.335	

#### Other versions

Complete bodies with integral transformer incorporating Faston connector terminals (Ø 6.35 or

2 x 2.8 mm/0.250 or 2 x 0.110 in.).

Please consult our Customer Care Centre.

(1) Can be fitted with additional contact blocks, see page 38.

(2) Bulb to be ordered separately, see page 60.



ZB4BW06



ZB4BW05

To combine with:  
heads, see page 35  
contacts, see page 38

**Light blocks****Screw clamp terminal connections** (Schneider Electric anti-loosening system)

Description	Supply voltage V	Sold in lots of	Unit reference	Weight kg/lb
Direct supply for BA 9s base fitting bulb, 2.4 W max., not included (1)	≤ 250	5	ZBV6	0.016/0.035

**Complete light bodies** (fixing collar + light block)**For bulb with BA 9s base fitting (incandescent, neon or LED)****Screw clamp terminal connections** (Schneider Electric anti-loosening system)

Light source	Supply voltage V	Color of light source	Reference	Weight kg/lb
--------------	---------------------	--------------------------	-----------	-----------------

**Direct supply**

BA 9s base fitting bulb, 2.4 W max, not included (1)	≤ 250	–	ZB4BV6	0.052/0.335
--	-------	---	--------	-------------

**Supply via integral transformer (1.2 VA, 6 V secondary)**

BA 9s base fitting incandescent bulb, included	~ 110...120 - 50/60 Hz	–	ZB4BV3	0.130/0.287
	~ 230 - 50 Hz	–	ZB4BV4	0.130/0.287
	~ 220...240 - 60 Hz	–	ZB4BV5	0.131/0.289
	~ 400 - 50 Hz	–	ZB4BV8	0.128/0.282
	~ 440...480 - 60 Hz	–	ZB4BV9	0.131/0.289

BA 9s base fitting LED, included	~ 110...120 - 50/60 Hz	White	ZB4BV3D1	0.134/0.295
		Green	ZB4BV3D3	0.134/0.295
		Red	ZB4BV3D4	0.134/0.295
		Orange	ZB4BV3D5	0.134/0.295
		Blue	ZB4BV3D6	0.134/0.295

	~ 230 - 50 Hz ~ 220...240 - 60 Hz	White	ZB4BV4D1	0.134/0.295
		Green	ZB4BV4D3	0.134/0.295
		Red	ZB4BV4D4	0.134/0.295
		Orange	ZB4BV4D5	0.134/0.295
		Blue	ZB4BV4D6	0.134/0.295

	~ 400 - 50/60 Hz	White	ZB4BV5D1	0.134/0.295
		Green	ZB4BV5D3	0.134/0.295
		Red	ZB4BV5D4	0.134/0.295
		Orange	ZB4BV5D5	0.134/0.295
		Blue	ZB4BV5D6	0.134/0.295

**Complete light bodies with 3-terminal “test” function** (fixing collar + light block)**For bulb with BA 9s base fitting (incandescent, neon or LED)****Screw clamp terminal connections** (Schneider Electric anti-loosening system)**Direct supply**

BA 9s base fitting bulb, 2.4 W max, not included (1)	≤ 250	–	ZB4BV156	0.062/0.137
--	-------	---	----------	-------------

**Other versions** Complete bodies with Faston connector terminals (Ø 6.35 or 2 x 2.8 mm/0.250 or 2 x 0.110 in.), see page 42.

(1) Bulb to be ordered separately, see page 60.



ZB4BV6



ZB4BV



ZB4BV156



ZBA4



ZBL2



ZBA333

#### Pushbutton caps - unmarked

For use with	Type of push	Color	Sold in lots of	Unit reference	Weight kg/lb	
ZBABA0 pushbutton heads supplied without cap	Flush	White	10	ZBA1	0.001/0.002	
		Black	10	ZBA2	0.001/0.002	
		Green	10	ZBA3	0.001/0.002	
		Red	10	ZBA4	0.001/0.002	
		Yellow	10	ZBA5	0.001/0.002	
		Blue	10	ZBA6	0.001/0.002	
	6 colors (1)	1	ZBA9	0.006/0.013		
	Projecting	Projecting	White	10	ZBL1	0.001/0.002
			Black	10	ZBL2	0.001/0.002
Green			10	ZBL3	0.001/0.002	
Red			10	ZBL4	0.001/0.002	
Yellow			10	ZBL5	0.001/0.002	
Blue			10	ZBL6	0.001/0.002	
6 colors (1)			1	ZBL9	0.006/0.013	

#### Pushbutton caps - marked

For use with	Type of push	Marking		Color of cap	Unit reference	Weight kg/lb
		Text	Color			
ZBABA0 pushbutton heads supplied without cap (sold in lots of 10)	Flush	I (2)	White	Green	ZBA331	0.001/0.002
			Black	White	ZBA131	0.001/0.002
		II	White	Green	ZBA336	0.001/0.002
			Black	White	ZBA136	0.001/0.002
		III	White	Green	ZBA337	0.001/0.002
			Black	White	ZBA137	0.001/0.002
		IV	White	Green	ZBA338	0.001/0.002
			Black	White	ZBL138	0.001/0.002
		START (2)	White	Green	ZBA333	0.001/0.002
			Black	White	ZBA133	0.001/0.002
		ON	White	Green	ZBA341	0.001/0.002
			Black	White	ZBA141	0.001/0.002
		MARCHE	White	Green	ZBA342	0.001/0.002
			Black	White	ZBA142	0.001/0.002
		UP (2)	Black	White	ZBA343	0.001/0.002
		DOWN (2)	White	Black	ZBA344	0.001/0.002
		⊕ (2)	White	Black	ZBA245	0.001/0.002
			Black	White	ZBA145	0.001/0.002
		↑ (3)	White	Black	ZBA335	0.001/0.002
			Black	White	ZBA334	0.001/0.002
		O (2)	White	Red	ZBA432	0.001/0.002
				Black	ZBA232	0.001/0.002
		ARRET	White	Red	ZBA433	0.001/0.002
				Black	ZBA233	0.001/0.002
		STOP (2)	White	Red	ZBA434	0.001/0.002
				Black	ZBA234	0.001/0.002
		OFF	White	Red	ZBA435	0.001/0.002
				Black	ZBA235	0.001/0.002
		⚠	White	Green	ZBA346	0.001/0.002
		R (2)	White	Blue	ZBA639	0.001/0.002
		+	White	Black	ZBA2934	0.001/0.002
		-	White	Black	ZBA2935	0.001/0.002

(1) Set of 6 different colored caps: White, Black, Green, Red, Yellow, or Blue.

(2) Double injection moulded marking.

(3) Can be clipped-in at 90° steps, through 360°.

107360



ZBP0

## Transparent boots for pushbuttons (1)

Description	For use with XB4 metal pushbuttons	Sold in lots of	Unit reference	Weight kg/lb
Single boots (2)	Flush with circular head	10	ZBPA	0.002/0.004
	Projecting with circular head and push-push version	10	ZBP0	0.002/0.004
	Flush or projecting with circular head for food industry applications	10	ZBP0A	0.002/0.004

## Colored boots

Description	Color	For use with	Sold in lots of	Unit reference	Weight kg/lb
Colored boots (can be replaced without dismantling the head)	White	ZB4BP1S	10	ZBP011	0.003/0.007
	Black	ZB4BP2S	10	ZBP012	0.003/0.007
	Green	ZB4BP3S	10	ZBP013	0.003/0.007
	Red	ZB4BP4S	10	ZBP014	0.003/0.007
	Yellow	ZB4BP5S	10	ZBP015	0.003/0.007
	Blue	ZB4BP6S	10	ZBP016	0.003/0.007
Clear membrane	Transparent	ZB4BP83	10	ZBP017	0.003/0.007

## Lens caps

For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
--------------	-------	-----------------	----------------	--------------

## Lens caps for light sources with integral LED

Pilot lights	White	10	ZBV0113	0.002/0.004
	Green	10	ZBV0133	0.002/0.004
	Red	10	ZBV0143	0.002/0.004
	Orange	10	ZBV0153	0.002/0.004
	Blue	10	ZBV0163	0.002/0.004
	5 different colored grooved lenses (3)	10	ZBV0103S	0.010/0.022

Illuminated pushbuttons, with flush push	White	10	ZBW9113	0.002/0.004
	Green	10	ZBW9133	0.002/0.004
	Red	10	ZBW9143	0.002/0.004
	Orange	10	ZBW9153	0.002/0.004
	Blue	10	ZBW9163	0.002/0.004

Illuminated pushbuttons, with projecting push	White	10	ZBW9313	0.002/0.004
	Green	10	ZBW9333	0.002/0.004
	Red	10	ZBW9343	0.002/0.004
	Orange	10	ZBW9353	0.002/0.004
	Blue	10	ZBW9363	0.002/0.004

## Lens caps for light sources with BA 9s base fitting

Pilot lights	White	10	ZBV011	0.002/0.004
	Green	10	ZBV013	0.002/0.004
	Red	10	ZBV014	0.002/0.004
	Orange	10	ZBV015	0.002/0.004
	Blue	10	ZBV016	0.002/0.004
	Clear	10	ZBV017	0.002/0.004

Illuminated pushbuttons, with flush push	White	10	ZBW911	0.002/0.004
	Green	10	ZBW913	0.002/0.004
	Red	10	ZBW914	0.002/0.004
	Orange	10	ZBW915	0.002/0.004
	Blue	10	ZBW916	0.002/0.004
	Clear	10	ZBW917	0.002/0.004

Illuminated pushbuttons, with projecting push	White	10	ZBW931	0.002/0.004
	Green	10	ZBW933	0.002/0.004
	Red	10	ZBW934	0.002/0.004
	Orange	10	ZBW935	0.002/0.004
	Blue	10	ZBW936	0.002/0.004
	Clear	10	ZBW937	0.002/0.004

(1) Boots for multiple-headed pushbuttons: see page 21.

(2) Permissible panel thickness 1 to 5 mm/0.039 to 0.197 in., cannot be used with legend holders.

(3) Clear, Green, Red, Orange, or Blue.

PG113818



ZBV0153

PG113819



ZBV016


# Control and signaling units Ø 22

Harmony XB4 metal


8 x 27 mm legends with 30 x 40 mm legend holders




ZBZ34




ZBY•H101




ZBZ32



ZBY•101



ZBY4140



ZBY2107

### Ø 30 x 40 mm/1.181 x 1.575 in. legend holders (flush mounting with bezel) for Ø 8 x 27 mm/0.315 x 1.063 in. legends (1)


Description	Legend	Sold in lots of	Unit reference	Weight kg/lb
	Color		Marking	
Without legend	–	10	ZBZ34	0.003/0.007
With blank legend	Black or Red background	10	ZBY2H101	0.004/0.009
	White or Yellow background	10	ZBY4H101	0.004/0.009

### Standard (Ø 30 x 40 mm/1.181 x 1.575 in. ) legend holders for Ø 8 x 27 mm/0.315 x 1.063 in. legends (1)

Description	Legend	Sold in lots of	Unit reference	Weight kg/lb			
	Color		Marking				
Without legend	–	10	ZBZ32	0.001/0.002			
With blank legend (for engraving)	Black or Red background	10	ZBY2101	0.002/0.004			
	White or Yellow background	10	ZBY4101	0.002/0.004			
With 8 x 27 mm /0.315 x 1.063 in. legend (with International marking)	Black or Red background (2)	O (Black background)	10	ZBY2146	0.002/0.004		
		O (Red background)	10	ZBY2931	0.002/0.004		
		I	10	ZBY2147	0.002/0.004		
		II	10	ZBY2148	0.002/0.004		
		O-I	10	ZBY2178	0.002/0.004		
		I-II	10	ZBY2179	0.002/0.004		
		I-O-II	10	ZBY2186	0.002/0.004		
		AUTO	10	ZBY2115	0.002/0.004		
		STOP	10	ZBY2304	0.002/0.004		
		Yellow background	10	ZBY4140 (3)	0.002/0.004		
		With 8 x 27 mm /0.315 x 1.063 in. legend (with French language marking)	Black or red background (2)	ARRET (Red background)	10	ZBY2104	0.002/0.004
				ARRET (Black background)	10	ZBY0104	0.002/0.004
				ARRET GENERAL	10	ZBY2129	0.002/0.004
				ARRET REARMEMENT	10	ZBY2133	0.002/0.004
ARRET-MARCHE	10			ZBY2166	0.002/0.004		
ARRIERE	10			ZBY2106	0.002/0.004		
AUTO CYCLE-CYCLE	10			ZBY2198	0.002/0.004		
AUTO CYCLE-MAIN	10			ZBY2199	0.002/0.004		
AUTO-MAIN	10			ZBY2164	0.002/0.004		
AUTO-O-MAIN	10			ZBY2185	0.002/0.004		
AVANT	10			ZBY2105	0.002/0.004		
AVANT-O-ARRIERE	10			ZBY2184	0.002/0.004		
C-P-C-NORMAL	10			ZBY2165	0.002/0.004		
CYCLE-MAIN	10			ZBY2197	0.002/0.004		
DECLenchement	10	ZBY2132	0.002/0.004				
DEFAUT (Black background)	10	ZBY2134	0.002/0.004				
DEFAUT (Red background)	10	ZBY2135	0.002/0.004				
DEPART CYCLE	10	ZBY2195	0.002/0.004				
DESCENTE	10	ZBY2108	0.002/0.004				
DROITE	10	ZBY2109	0.002/0.004				
ENclenchement	10	ZBY2131	0.002/0.004				
EN SERVICE	10	ZBY2111	0.002/0.004				
FERMETURE	10	ZBY2114	0.002/0.004				
GAUCHE	10	ZBY2110	0.002/0.004				
HORS SERVICE	10	ZBY2112	0.002/0.004				
HORS-EN	10	ZBY2167	0.002/0.004				
LENT	10	ZBY2127	0.002/0.004				
MAIN	10	ZBY2116	0.002/0.004				
MARCHE	10	ZBY2103	0.002/0.004				
MONTEE	10	ZBY2107	0.002/0.004				
OUVERTURE	10	ZBY2113	0.002/0.004				
PHASE / PHASE	10	ZBY2196	0.002/0.004				
REARMEMENT (Red background)	10	ZBY2123	0.002/0.004				
REARMEMENT (Black background)	10	ZBY0123	0.002/0.004				
SOUS TENSION	10	ZBY2126	0.002/0.004				
VITE	10	ZBY2128	0.002/0.004				
Red background	ARRET D'URGENCE	10	ZBY2130 (3)	0.002/0.004			

(1) For legends, see pages 54 to 56.

(2) "Start" functions: White letters on Black background. "Stop" functions: White letters on Red background (unless otherwise specified above).


(3) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

# Control and signaling units Ø 22

## Harmony XB4 metal

### 8 x 27 mm legends with 30 x 40 mm legend holders

#### Standard (Ø 30 x 40 mm/1.181 x 1.575 in.) legend holders with Ø 8 x 27 mm 10.315 x 1.063 in. legends (continued)



ZBY2303

Description	Legend		Sold in lots of	Unit Reference	Weight kg/lb
	Color	Marking			
With legend (with English language marking)	Black or Red background (1)	AUTO-HAND	10	ZBY2364	0.002/0.004
		AUTO-O-HAND	10	ZBY2385	0.002/0.004
		CLOSE	10	ZBY2314	0.002/0.004
		DOWN	10	ZBY2308	0.002/0.004
		FAST	10	ZBY2328	0.002/0.004
		FORWARD	10	ZBY2305	0.002/0.004
		HAND	10	ZBY2316	0.002/0.004
		HAND-OFF-AUTO	10	ZBY2387	0.002/0.004
		INCH	10	ZBY2321	0.002/0.004
		LEFT	10	ZBY2310	0.002/0.004
		OFF	10	ZBY2312	0.002/0.004
		OFF-ON	10	ZBY2367	0.002/0.004
		ON	10	ZBY2311	0.002/0.004
		OPEN	10	ZBY2313	0.002/0.004
		POWER ON	10	ZBY2326	0.002/0.004
		RESET (Red background)	10	ZBY2323	0.002/0.004
		RESET (Black background)	10	ZBY2322	0.002/0.004
		REVERSE	10	ZBY2306	0.002/0.004
		RIGHT	10	ZBY2309	0.002/0.004
		RUN	10	ZBY2334	0.002/0.004
		SLOW	10	ZBY2327	0.002/0.004
		START	10	ZBY2303	0.002/0.004
		STOP-START	10	ZBY2366	0.002/0.004
UP	10	ZBY2307	0.002/0.004		
	Red background	EMERGENCY STOP	10	ZBY2330 (2)	0.002/0.004
With legend (with German language marking)	Black or red background (1)	AB	10	ZBY2208	0.002/0.004
		AUF	10	ZBY2207	0.002/0.004
		AUS	10	ZBY2204	0.002/0.004
		AUS-EIN	10	ZBY2266	0.002/0.004
		AUS-IN BETRIEB	10	ZBY2267	0.002/0.004
		AUS-RÜCKSTELLUNG	10	ZBY2233	0.002/0.004
		AUSSCHALTEN	10	ZBY2232	0.002/0.004
		AUTO-HAND	10	ZBY2364	0.002/0.004
		AUTO-O-HAND	10	ZBY2385	0.002/0.004
		AUTOZYKL-HAND	10	ZBY2299	0.002/0.004
		AUTOZYKL- 1 ZYKL	10	ZBY2298	0.002/0.004
		C-P-C-NORMAL	10	ZBY2265	0.002/0.004
		EIN	10	ZBY2203	0.002/0.004
		EINSCHALTEN	10	ZBY2231	0.002/0.004
		HAND	10	ZBY2316	0.002/0.004
		LANGSAM	10	ZBY2227	0.002/0.004
		LINKS	10	ZBY2210	0.002/0.004
		NOT-AUS (Red background)	10	ZBY2230	0.002/0.004
		ÖFFNEN	10	ZBY2213	0.002/0.004
		RECHTS	10	ZBY2209	0.002/0.004
		RÜCKSTELLUNG	10	ZBY2223	0.002/0.004
		SCHLIESSEN	10	ZBY2214	0.002/0.004
		SCHNELL	10	ZBY2228	0.002/0.004
		SPANNUNG EIN	10	ZBY2226	0.002/0.004
		STEUERUNG AUS	10	ZBY2212	0.002/0.004
		STEUERUNG EIN	10	ZBY2211	0.002/0.004
		STÖRUNG (Black background)	10	ZBY2234	0.002/0.004
		STÖRUNG (Red background)	10	ZBY2235	0.002/0.004
		VOR	10	ZBY2205	0.002/0.004
		VOR-O-ZURÜCK	10	ZBY2284	0.002/0.004
		ZURÜCK	10	ZBY2206	0.002/0.004
		ZYKLUS-HAND	10	ZBY2297	0.002/0.004
ZYKLUSSTART	10	ZBY2295	0.002/0.004		
	Red background	NOT-HALT	10	ZBY2229 (2)	0.002/0.004
	Yellow background	NOT-HALT	10	ZBY22420001 (2)	0.002/0.004

(1) "Start" functions: White letters on Black background. "Stop" functions: White letters on Red background (unless otherwise specified above).

(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

**Ø 8 x 27 mm/0.315 x 1.063 in. marked legends (for Ø 30 x 40 mm/1.181 x 1.575 in. legend holders ZBZ32 and ZBZ34)**

Language	Color of background	Marking	Sold in lots of	Unit Reference	Weight kg/lb		
<b>Without</b>	Black or Red	–	10	ZBY0101	0.001/0.002		
	White or Yellow	–	10	ZBY0102	0.001/0.002		
<b>International</b>	Black or Red (1)	O (Black background)	10	ZBY02146	0.001/0.002		
		O (Red background)	10	ZBY02931	0.001/0.002		
		I	10	ZBY02147	0.001/0.002		
		II	10	ZBY02148	0.001/0.002		
		O-I	10	ZBY02178	0.001/0.002		
		I-II	10	ZBY02179	0.001/0.002		
		I-O-II	10	ZBY02186	0.001/0.002		
		AUTO	10	ZBY02115	0.001/0.002		
		STOP	10	ZBY02304	0.001/0.002		
		Yellow		10	ZBY0140 (2)	0.001/0.002	
		<b>French</b>	Black or Red (1)	ARRET (Red background)	10	ZBY02104	0.001/0.002
				ARRET (Black background)	10	ZBY00104	0.001/0.002
				ARRET GENERAL	10	ZBY02129	0.001/0.002
				ARRET REARMEMENT	10	ZBY02133	0.001/0.002
				ARRET-MARCHE	10	ZBY02166	0.001/0.002
ARRIERE	10			ZBY02106	0.001/0.002		
AUTO CYCLE-CYCLE	10			ZBY02198	0.001/0.002		
AUTO CYCLE-MAIN	10			ZBY02199	0.001/0.002		
AUTO-MAIN	10			ZBY02164	0.001/0.002		
AUTO-O-MAIN	10			ZBY02185	0.001/0.002		
AVANT	10			ZBY02105	0.001/0.002		
AVANT-O-ARRIERE	10			ZBY02184	0.001/0.002		
C-P-C-NORMAL	10			ZBY02165	0.001/0.002		
CYCLE-MAIN	10			ZBY02197	0.001/0.002		
DECLENCHEMENT	10			ZBY02132	0.001/0.002		
DEFAULT (Black background)	10			ZBY02134	0.001/0.002		
DEFAULT (Red background)	10			ZBY02135	0.001/0.002		
DEPART CYCLE	10			ZBY02195	0.001/0.002		
DESCENTE	10			ZBY02108	0.001/0.002		
DROITE	10			ZBY02109	0.001/0.002		
ENCLENCHEMENT	10			ZBY02131	0.001/0.002		
EN SERVICE	10			ZBY02111	0.001/0.002		
FERMETURE	10			ZBY02114	0.001/0.002		
GAUCHE	10			ZBY02110	0.001/0.002		
HORS SERVICE	10			ZBY02112	0.001/0.002		
HORS-EN	10			ZBY02167	0.001/0.002		
LENT	10			ZBY02127	0.001/0.002		
MAIN	10			ZBY02116	0.001/0.002		
MARCHE	10			ZBY02103	0.001/0.002		
MONTEE	10			ZBY02107	0.001/0.002		
OUVERTURE	10			ZBY02113	0.001/0.002		
PHASE / PHASE	10			ZBY02196	0.001/0.002		
REARMEMENT (Red background)	10			ZBY02123	0.001/0.002		
REARMEMENT (Black background)	10	ZBY00123	0.001/0.002				
SOUS TENSION	10	ZBY02126	0.001/0.002				
VITE	10	ZBY02128	0.001/0.002				
Red	ARRET D'URGENCE		10	ZBY02130 (2)	0.001/0.002		

(1) "Start" functions: White letters on Black background. "Stop" functions: White letters on Red background (unless otherwise specified above)

(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

DG121191



ZBY02178

DF540629



ZBY0140

DG121117



ZBY0104

**Ø 8 x 27 mm/0.315 x 1.063 in. marked legends (for Ø 30 x 40 mm/1.181 x 1.575 in. legend holders ZBZ32 and ZBZ34) (continued)**

Language	Color of background	Marking	Sold in lots of	Unit Reference	Weight kg/lb		
English	Black or Red (1)	AUTO-HAND	10	ZBY02364	0.001/0.002		
		AUTO-O-HAND	10	ZBY02385	0.001/0.002		
		CLOSE	10	ZBY02314	0.001/0.002		
		DOWN	10	ZBY02308	0.001/0.002		
		FAST	10	ZBY02328	0.001/0.002		
		FORWARD	10	ZBY02305	0.001/0.002		
		HAND	10	ZBY02316	0.001/0.002		
		HAND-OFF-AUTO	10	ZBY02387	0.001/0.002		
		INCH	10	ZBY02321	0.001/0.002		
		LEFT	10	ZBY02310	0.001/0.002		
		OFF	10	ZBY02312	0.001/0.002		
		OFF-ON	10	ZBY02367	0.001/0.002		
		ON	10	ZBY02311	0.001/0.002		
		OPEN	10	ZBY02313	0.001/0.002		
		POWER ON	10	ZBY02326	0.001/0.002		
		RESET (Red background)	10	ZBY02323	0.001/0.002		
		RESET (Black background)	10	ZBY02322	0.001/0.002		
		REVERSE	10	ZBY02306	0.001/0.002		
		RIGHT	10	ZBY02309	0.001/0.002		
		RUN	10	ZBY02334	0.001/0.002		
		SLOW	10	ZBY02327	0.001/0.002		
		START	10	ZBY02303	0.001/0.002		
		STOP-START	10	ZBY02366	0.001/0.002		
UP	10	ZBY02307	0.001/0.002				
	Red	EMERGENCY STOP	10	ZBY02330 (2)	0.001/0.002		
German	Black or Red (1)	AB	10	ZBY02208	0.001/0.002		
		AUF	10	ZBY02207	0.001/0.002		
		AUS	10	ZBY02204	0.001/0.002		
		AUS-EIN	10	ZBY02266	0.001/0.002		
		AUS-IN BETRIEB	10	ZBY02267	0.001/0.002		
		AUS-RÜCKSTELLUNG	10	ZBY02233	0.001/0.002		
		AUSSCHALTEN	10	ZBY02232	0.001/0.002		
		AUTO-HAND	10	ZBY02364	0.001/0.002		
		AUTO-O-HAND	10	ZBY02385	0.001/0.002		
		AUTOZYKL-HAND	10	ZBY02299	0.001/0.002		
		AUTOZYKL- 1 ZYKL	10	ZBY02298	0.001/0.002		
		C-P-C-NORMAL	10	ZBY02265	0.001/0.002		
		EIN	10	ZBY02203	0.001/0.002		
		EINSCHALTEN	10	ZBY02231	0.001/0.002		
		HAND	10	ZBY02316	0.001/0.002		
		LANGSAM	10	ZBY02227	0.001/0.002		
		LINKS	10	ZBY02210	0.001/0.002		
		NOT-AUS (Red background)	10	ZBY02230	0.001/0.002		
		ÖFFNEN	10	ZBY02213	0.001/0.002		
		RECHTS	10	ZBY02209	0.001/0.002		
		RÜCKSTELLUNG	10	ZBY02223	0.001/0.002		
		SCHLIESSEN	10	ZBY02214	0.001/0.002		
		SCHNELL	10	ZBY02228	0.001/0.002		
		SPANNUNG EIN	10	ZBY02226	0.001/0.002		
		STEUERUNG AUS	10	ZBY02212	0.001/0.002		
		STEUERUNG EIN	10	ZBY02211	0.001/0.002		
		STÖRUNG (Black background)	10	ZBY02234	0.001/0.002		
		STÖRUNG (Red background)	10	ZBY02235	0.001/0.002		
		VOR	10	ZBY02205	0.001/0.002		
		VOR-O-ZURÜCK	10	ZBY02284	0.001/0.002		
		ZURÜCK	10	ZBY02206	0.001/0.002		
		ZYKLUS-HAND	10	ZBY02297	0.001/0.002		
		ZYKLUSSTART	10	ZBY02295	0.001/0.002		
			Red	NOT-HALT	10	ZBY02229 (2)	0.001/0.002
			Yellow	NOT-HALT	10	ZBY022420001 (2)	0.001/0.002

DG121279




ZBY02303

DG121264



ZBY02228

814309

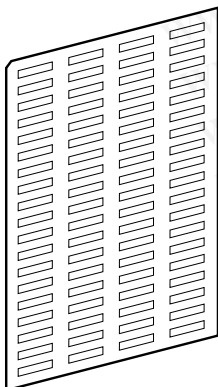

ZBY4100

**Sheets of peel-off legends (with backing board and protective transparent cover)**

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Sheet of 76 legends Ø 8 x 27 mm/0.315 x 1.063 in.	Ø 30 x 40 mm/1.181 x 1.575 in. legend holder ZBZ32 and ZBZ34	10	ZBY4100	0.043/0.095

(1) "Start" functions: White letters on Black background. "Stop" functions: White letters on Red background (unless otherwise specified above).


(2) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

## Control and signaling units Ø 22

Harmony XB4 metal

Legend holders for 18 x 27 mm legends

18 x 27 mm legends for engraving or printing




ZBZ33

ZBY610●

## Standard (Ø 30 x 50 mm/1.181 x 1.968 in.) legend holders for Ø 18 x 27 mm /0.709 x 1.063 in. legends

Description	Color of background	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZBZ33	0.001/0.002
With blank legend	Black or Red	10	ZBY6101	0.002/0.004
	White or Yellow	10	ZBY6102	0.002/0.004
	Yellow	10	ZBY6140 (1)	0.002/0.004




ZBZ35

ZBY6H10●

## Ø 30 x 50 mm/1.181 x 1.968 in. legend holder (flush mounting with bezel) for Ø 18 x 27 mm/0.709 x 1.063 in. legends

Description	Color of background	Sold in lots of	Unit reference	Weight kg/lb
Without legend	–	10	ZBZ35	0.003/0.007
With blank legend	Black or Red	10	ZBY6H101	0.004/0.009
	White or Yellow	10	ZBY6H102	0.004/0.009



ZBY6140

## Ø 18 x 27 mm/0.709 x 1.063 in. legends for engraving (for Ø 30 x 50 mm /1.181 x 1.968 in. legend-holders)


Description	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
Black or Red background	–	Without	10	ZBY5101	0.001/0.002
White or Yellow background	–	Without	10	ZBY5102	0.001/0.002
Yellow background	International		10	ZBY6140 (1)	0.001/0.002
	French	ARRET D'URGENCE	10	ZBY55130 (1)	0.001/0.002
	English	EMERGENCY STOP	10	ZBY55330 (1)	0.001/0.002

## Sheets of peel-off legends (with backing board and protective transparent cover)

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Sheet of 40 Ø 18 x 27 mm /0.709 x 1.063 in. legends	Ø 30 x 50 mm/1.181 x 1.968 in. legend holder ZBZ33 and ZBZ35	10	ZBY5100	0.044/0.097


(1) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo has been added.

DF540813

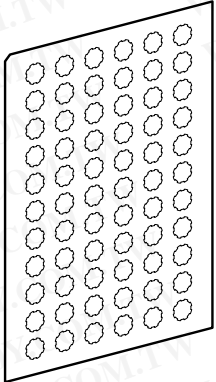

ZBY1101

DF540548




XBY2U

PF514403



ZBY9130

DF539842



ZBY9160

### Legends for XB4B pushbuttons, illuminated pushbuttons and pilot lights

Description	Language	Marking	Sold in lots of	Unit reference	Weight kg/lb
<b>Sheets of 66 circular peel-off, transparent, self-adhesive legends</b>	–	Without	10	ZBY1101	0.017/0.037
<b>Strips of 66 circular peel-off, transparent, self-adhesive legends</b>	International	O	10	ZBY1146	0.017/0.037
		I	10	ZBY1147	0.017/0.037
		II	10	ZBY1148	0.017/0.037
		III	10	ZBY1149	0.017/0.037
		STOP	10	ZBY1304	0.017/0.037
		↑	10	ZBY1912	0.017/0.037
	French	ARRET	10	ZBY1104	0.017/0.037
		ARRIERE	10	ZBY1106	0.017/0.037
		AUTO	10	ZBY1115	0.017/0.037
		AVANT	10	ZBY1105	0.017/0.037
		DESCENTE	10	ZBY1108	0.017/0.037
		MAIN	10	ZBY1116	0.017/0.037
		MARCHE	10	ZBY1103	0.017/0.037
	English	MONTEE	10	ZBY1107	0.017/0.037
		HAND	10	ZBY1316	0.017/0.037
		OFF	10	ZBY1312	0.017/0.037
		ON	10	ZBY1311	0.017/0.037
German	START	10	ZBY1303	0.017/0.037	
	AB	10	ZBY1208	0.017/0.037	
	AUF	10	ZBY1207	0.017/0.037	
	AUS	10	ZBY1204	0.017/0.037	
	EIN	10	ZBY1203	0.017/0.037	
ZU	10	ZBY1214	0.017/0.037		

### "SIS Label" labelling software

Application	For use with	Reference	Weight kg/lb
<b>Legend design for English, French, German, Spanish, Italian</b>	ZBY001, ZBY0101, ZBY0102, ZBY1101 ZBY4100, ZBY5100, ZBY5101 and ZBY5102	XBY2U	0.100/0.220


### Circular yellow legends for mushroom head pushbuttons




Used for "Emergency stop" function (1)

Diameter mm/in.	Conforming to standards	Marking on Yellow background	Sold in lots of	Unit Reference	Weight kg/lb
60/2.362	EN/IEC 60204-1 and EN/ISO 13850	–	10	ZBY9140	0.004/0.009
		ARRET D'URGENCE	10	ZBY9130	0.004/0.009
		EMERGENCY STOP	10	ZBY9330	0.004/0.009
		NOT-HALT	10	ZBY9230	0.004/0.009
		PARADA DE EMERGENCIA	10	ZBY9430	0.004/0.009
		ARRESTO DE EMERGENZA	10	ZBY9630	0.004/0.009
90/3.543	EN/IEC 60204-1 and EN/ISO 13850	–	10	ZBY8140	0.008/0.018
		ARRET D'URGENCE	10	ZBY8130	0.008/0.018
		EMERGENCY STOP	10	ZBY8330	0.008/0.018
		NOT-HALT	10	ZBY8230	0.008/0.018
		PARADA DE EMERGENCIA	10	ZBY8430	0.008/0.018
		ARRESTO DE EMERGENZA	10	ZBY8630	0.008/0.018

Used for "Emergency switching off" function

60/2.362	EN/IEC 60204-1	–	10	ZBY9101	0.004/0.009
		COUPURE D'URGENCE	10	ZBY9160	0.004/0.009
		EMERGENCY SWITCHING OFF	10	ZBY9360	0.004/0.009
		NOT-AUS	10	ZBY9260	0.004/0.009
		DESCONEXION DE EMERGENCIA	10	ZBY9460	0.004/0.009
90/3.543	EN/IEC 60204-1	–	10	ZBY9660	0.004/0.009
		INTERRUZIONE DI EMERGENZA	10	ZBY8101	0.008/0.018
		COUPURE D'URGENCE	10	ZBY8160	0.008/0.018
		EMERGENCY SWITCHING OFF	10	ZBY8360	0.008/0.018
		NOT-AUS	10	ZBY8260	0.008/0.018
DESCONEXION DE EMERGENCIA	10	ZBY8460	0.008/0.018		
INTERRUZIONE DI EMERGENZA	10	ZBY8660	0.008/0.018		

(1) For complying with EN/ISO 13850 standard, paragraph 4.4.6., Emergency Stop function logo  has been added.

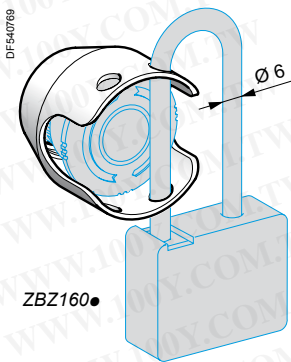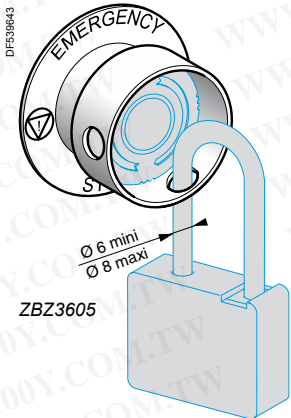

### Accessories for mushroom head pushbuttons

Description	Exclusive use with the following Ø 40 mm/1.575 in. trigger action pushbuttons	Color	Reference	Weight kg/lb
-------------	---	-------	-----------	--------------

<b>Padlocking kit</b> (1) (2) For Emergency stop (3) and Emergency switching off function (4), (padlockable)	XB4BS844●, XB4BS9445, ZB4BS844, ZB4BS944●.	Yellow	<b>ZBZ3605</b>	0.045/0.099
---	---	--------	----------------	-------------

<b>Metal guards</b> For Emergency stop (3) function Padlockable (2)	XB4BT8●,	Chromium plated	<b>ZBZ1600</b>	0.046/0.101
	XB4BS8●,	Black	<b>ZBZ1602</b>	0.046/0.101
	XB4BS9●,	Red	<b>ZBZ1604</b>	0.046/0.101
	ZB4BT8●, ZB4BS8●, ZB4BS9●.	Blue	<b>ZBZ1606</b>	0.046/0.101

Description	Marking	Color	Sold in lots of	Reference	Weight kg/lb
-------------	---------	-------	-----------------	-----------	--------------

Ø 60 mm/2.362 in. <b>legend</b> for padlocking device <b>ZBZ3605</b> For Emergency stop function (3)	Without	Yellow	–	<b>ZBY9140T</b>	0.004/0.009
	ARRET D'URGENCE	Yellow	–	<b>ZBY9130T</b>	0.004/0.009
	EMERGENCY STOP	Yellow	–	<b>ZBY9330T</b>	0.004/0.009
	NOT-HALT	Yellow	–	<b>ZBY9230T</b>	0.004/0.009

Ø 60 mm/2.362 in. <b>legend</b> for padlocking device <b>ZBZ3605</b> For Emergency switching off function (4)	Without	Yellow	–	<b>ZBY9101T</b>	0.004/0.009
	COUPURE D'URGENCE	Yellow	–	<b>ZBY9160T</b>	0.004/0.009
	EMERGENCY SWITCHING OFF	Yellow	–	<b>ZBY9360T</b>	0.004/0.009
	NOT-AUS	Yellow	–	<b>ZBY9260T</b>	0.004/0.009

Ø 60 mm/2.362 in. <b>circular legend</b> compatible with Emergency stop	-	Yellow	5	<b>ZBY9121</b>	0.007/0.015
	EMERGENCY STOP	Yellow	5	<b>ZBY9320</b>	0.007/0.015
	ARRET D'URGENCE	Yellow	5	<b>ZBY9120</b>	0.007/0.015
	NOT-HALT	Yellow	5	<b>ZBY9220</b>	0.007/0.015
	PARADA DE EMERGENCIA	Yellow	5	<b>ZBY9420</b>	0.007/0.015
	ARRESTO DI EMERGENZA	Yellow	5	<b>ZBY9620</b>	0.007/0.015

### Other accessories

Description	For use with	Color	Reference	Weight kg/lb
-------------	--------------	-------	-----------	--------------

<b>Plastic guard</b>	Selector switches and key switches	Black	<b>ZBZ2102</b>	0.005/0.011
----------------------	---------------------------------------	-------	----------------	-------------

<b>Padlockable flaps</b>	Pushbuttons	Black	<b>ZB4BZ62</b>	0.076/0.168
		Red	<b>ZB4BZ64</b>	0.076/0.168
		Yellow	<b>ZB4BZ65</b>	0.076/0.168
		Blue	<b>ZB4BZ66</b>	0.076/0.168

Description	Material	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
-------------	----------	--------------	-------	-----------------	----------------	--------------

<b>Bellows seals for harsh environments</b> (Environments subject to humidity, dust, high-pressure cleaning etc...) <b>IP 69K (5)</b>	Silicone	Emergency stop / Switching off function	Yellow	2	<b>ZBZ28</b>	0.009/0.020
		Other functions	Black	2	<b>ZBZ58</b>	0.009/0.020

(1) Standard circular legends are not compatible with this product. Use special legends **ZBY9●●●T**.

(2) No isolation function is possible when this guard is fitted.

(3) Ensures conformity with standards EN/IEC 60204-1 and EN/ISO 13850.

(4) Ensures conformity with standard EN/IEC 60204-1.


(5) Only when mounted on control stations. Use legends **ZBY9●●●T**.




ZB5SZ3




ZB4BZ007



ZB4BZ011



ZBZ007

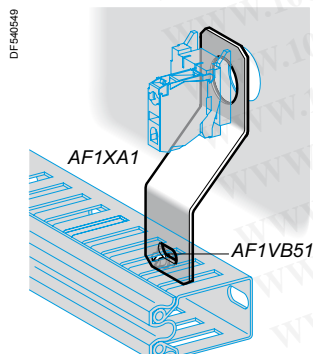

AF1XA1

AF1VB510

## Other accessories (continued)

Description	For use with	Color	Sold in lots of	Unit reference	Weight kg/lb
Metal circular blanking plug (1)	Ø 22 mm/0.866 in. control and signaling units	Chromium plated	10	ZB4SZ3	0.023/0.051
		Black	10	ZB4SZ37	0.023/0.051
Plastic blanking plug (with fixing nut)	Ø 22 mm/0.866 in. control and signaling units	Black	10	ZB5SZ3	0.009/0.020
Liquid spray protective washer to be fitted under the head	Ø 22 mm/0.866 in. control and signaling units	Chromium plated	50	ZB4BZ007	0.010/0.022
		Black	50	ZB4BZ0077	0.010/0.022
Flush mounting kit	Pushbutton ZB4B● with head mounted flush with bezel	Chromium plated	1	ZB4BZ011	0.007/0.015
		Black	1	ZB4BZ0117	0.007/0.015
Adapter (Ø 30 to Ø 22 mm/1.181 to 0.866 in. reducer)	All pushbuttons	Chromium plated	1	ZB4BZ012	–
Plastic clips	2 or 3 levels of contact blocks ZBE10● in high vibration environment	–	10	ZBZ007	–
Dummy contact block	Contact blocks ZBE10● and transformer blocks ZBV5B	–	5	ZBE000	–
Set of tabs for Faston connection	Contact blocks ZBE10● and light blocks ZBV●	–	10	ZBZ003	–
Description	Application		Sold in lots of	Unit reference	Weight kg/lb
Cable ducting support	Fixing beneath head		10	AF1XA1	0.030/0.066
M5 x 10 screw, with hexagonal slotted head	For fixing cable ducting		100	AF1VB510	0.003/0.007
Support	For pushbuttons, switches and pilot lights		1	DX1AP52	0.160/0.353
Boot for contact block	For protection against dusty environment		1	ZBZ60	0.098/0.216


(1) Body/fixing collar ZB4BZ009 required for mounting must be ordered separately, see page 41.

(2) Restriction for use: refer to the product instruction sheet on www.schneider-electric.com.

# Control and signaling units Ø 22

Harmony XB4 metal

Accessories for illuminated pushbuttons: bulbs



### Bulbs with BA 9s base fitting and associated accessories

Description	Characteristics	Color	Sold in lots of	Unit reference	Weight kg/lb
LEDs	≈ 24 V	White	1	DL1CJ0241	0.002/0.004
		Green	1	DL1CJ0243	0.002/0.004
		Red	1	DL1CJ0244	0.002/0.004
		Orange	1	DL1CJ0245	0.002/0.004
		Blue	1	DL1CJ0246	0.002/0.004
	≈ 48 V	Green	1	DL1CJ0483	0.002/0.004
		Red	1	DL1CJ0484	0.002/0.004
		Orange	1	DL1CJ0485	0.002/0.004
	6 V - 1.2 W	White	1	DL1CD0061	0.002/0.004
		Green	1	DL1CD0063	0.002/0.004
Red		1	DL1CD0064	0.002/0.004	
Orange		1	DL1CD0065	0.002/0.004	
Blue		1	DL1CD0066	0.002/0.004	
Incandescent bulbs	6 V - 1.2 W	–	10	DL1CB006	0.002/0.004
	24 V - 2 W	–	10	DL1CE024	0.002/0.004
	120...130 V 2.4 W	–	10	DL1CE130	0.002/0.004
Neon bulbs	120...130 V	–	10	DL1CF110	0.002/0.004
	230...240 V	–	10	DL1CF220	0.002/0.004
Bulb extractor	–	–	1	XBFX13	0.005/0.011
Lens cap tightening tool	Illuminated pushbuttons, with flush push	–	1	ZBZ8	0.009/0.020

# Control and signaling units Ø 22

Harmony XB4 metal

Accessories for pushbuttons: keys



ZBG455



ZBDLU1



ZBG455P



ZBGP



ZBDD2

## Replacement keys

Description	Key number	Reference	Weight kg/lb
<b>For latching mushroom head pushbuttons and selector switches</b>			
Sets of 2 keys	455	ZBG455	0.013/0.029
	421E	ZBG421E	0.014/0.031
	458A	ZBG458A	0.014/0.031
	520E	ZBG520E	0.014/0.031
	3131A	ZBG3131A	0.014/0.031
	4A185	ZBDA185	0.014/0.031
	LU1	ZBDLU1	0.014/0.031
	LU2	ZBDLU2	0.014/0.031
	LU3	ZBDLU3	0.014/0.031
	LU4	ZBDLU4	0.014/0.031
	LU5	ZBDLU5	0.014/0.031
	LU6	ZBDLU6	0.014/0.031
	LU7	ZBDLU7	0.014/0.031
	LU8	ZBDLU8	0.014/0.031
	LU9	ZBDLU9	0.014/0.031
	LU10	ZBDLU10	0.014/0.031
	LU11	ZBDLU11	0.014/0.031
	LU12	ZBDLU12	0.014/0.031
	LU13	ZBDLU13	0.014/0.031
	LU14	ZBDLU14	0.014/0.031
	8D1	ZBD8D1	0.014/0.031
	Specific key	ZBGK (1)	0.014/0.031

## For booted selector switches

Sets of 2 keys, one of which supplied booted (rubber boot)	455	ZBG455P	–
	421E	ZBG421EP	–
	458A	ZBG458AP	–
	520E	ZBG520EP	–
	3131A	ZBG3131AP	–

## Accessory for key switches (2)

Description	Function	Reference	Weight kg/lb
Keyhole cover (rubber boot)	Protection of lock barrel when no key inserted in lock	ZBGP	0.005/0.011

## Boot for standard handle

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Boot for standard handle	ZB4BD●● and ZB5AD●●	5	ZBDD2	0.005/0.011

(1) Key number to be added when ordering.

(2) Not compatible with products with key TEC10.

<b>A</b>					
AF1VB510	59	XB4BVB●	34	ZB4BD●●	31
AF1XA1	59	XB4BVG●	34	ZB4BD912	36
APE1C2150	43	XB4BVM●	34	ZB4BD922	36
APE1C2250	43	XB4BW31B5	17	ZB4BG●	30
APE1PRE21	43	XB4BW31G5	17	ZB4BG0●	30
		XB4BW31M5	17	ZB4BG●TEC10	31
		XB4BW33B5	17	ZB4BG05TEC10	31
		XB4BW33G5	17	ZB4BH●	26
<b>D</b>		XB4BW33M5	17	ZB4BH●●	27
DL1CB006	60	XB4BW34B5	17	ZB4BH0●	26
DL1CD006●	60	XB4BW34G5	17	ZB4BH0●●	27
DL1CE024	60	XB4BW34M5	17	ZB4BJ●	29
DL1CE130	60	XB4BW35B5	17	ZB4BJ●●●	29
DL1CF110	60	XB4BW35G5	17	ZB4BK1●●●	33
DL1CF220	60	XB4BW35M5	17	ZB4BL●	14
DL1CJ0241	60	XB4BW36B5	17	ZB4BL●●●	16
DL1CJ0243	60	XB4BW36G5	17	ZB4BL7340	20
DL1CJ0244	60	XB4BW36M5	17	ZB4BL7341	20
DL1CJ0245	60	XB4BW36S5	17	ZB4BP●	15
DL1CJ0246	60	XB4BW3135	19	ZB4BP●S	15
DL1CJ0483	60	XB4BW3145	19		51
DL1CJ0484	60	XB4BW3165	19	ZB4BP18	15
DL1CJ0485	60	XB4BW3335	19	ZB4BP38	15
DX1AP52	59	XB4BW3345	19	ZB4BP48	15
		XB4BW3365	19	ZB4BP58	15
		XB4BW3435	19	ZB4BP68	15
<b>X</b>		XB4BW3445	19	ZB4BP183	15
XB4BA●●	14	XB4BW3465	19	ZB4BP383	15
XB4BA●●●	36	XB4BW3535	19	ZB4BP483	15
XB4BA●●●●	16	XB4BW3545	19	ZB4BP583	15
XB4BA711237	21	XB4BW3565	19	ZB4BP683	15
XB4BA731327	21	XB4BW73731B5	20	ZB4BP●83	51
XB4BC21	22	XB4BW73731G5	20	ZB4BR●	22
XB4BD●●	28	XB4BW73731M5	20	ZB4BR●16	22
XB4BG●●	30	XB5DSB	36	ZB4BS834	24
XB4BJ●●	29	XB5DSG	36	ZB4BS844	24
XB4BK123B5	32	XB5DSM	36	ZB4BS864	24
XB4BK123G5	32	XB5DT1S	36	ZB4BS934	24
XB4BK123M5	32	XB5KSB	36	ZB4BS944	24
XB4BK124B5	32	XB5KSG	36	ZB4BS964	24
XB4BK124G5	32	XB5KSM	36	ZB4BT2	23
XB4BK124M5	32	XBFX13	60	ZB4BT84	24
XB4BK125B5	32	XB52U	38	ZB4BT844	24
XB4BK125G5	32		40	ZB4BV01	35
XB4BK125M5	32		42	ZB4BV01S	35
XB4BK133B5	32		57	ZB4BV003	34
XB4BK133G5	32			ZB4BV03	35
XB4BK133M5	32	XD4PA●●	37	ZB4BV3	49
XB4BK134B5	32			ZB4BV3D1	49
XB4BK134G5	32	<b>Z</b>		ZB4BV3D3	49
XB4BK134M5	32	ZB2BE101	38	ZB4BV3D4	49
XB4BK135B5	32	ZB2BE102	38	ZB4BV3D5	49
XB4BK135G5	32	ZB4BA●	14	ZB4BV3D6	49
XB4BK135M5	32	ZB4BA●●	14	ZB4BV03S	35
XB4BL42	14		15	ZB4BV04	35
XB4BL4325	16		18	ZB4BV4	49
XB4BL73415	20		20	ZB4BV4D1	49
XB4BP●●	15	ZB4BA●●●	16	ZB4BV4D3	49
XB4BS8444	24		21	ZB4BV4D4	49
XB4BS84441	24	ZB4BA7●●●	20	ZB4BV4D5	49
XB4BS8445	24	ZB4BA7●●●●	21	ZB4BV4D6	49
XB4BS9445	24	ZB4BB2	37	ZB4BV04S	35
XB4BT842	24	ZB4BB4	37	ZB4BV05	35
XB4BT845	24	ZB4BC●	22	ZB4BV5	49
XB4BV5B●	35	ZB4BC●●	22		
XB4BV●●	35	ZB4BD●	28		
				ZB4BV5D1	49
				ZB4BV5D3	49
				ZB4BV5D4	49
				ZB4BV5D5	49
				ZB4BV5D6	49
				ZB4BV05S	35
				ZB4BV06	35
				ZB4BV6	49
				ZB4BV06S	35
				ZB4BV07	35
				ZB4BV07S	35
				ZB4BV8	49
				ZB4BV9	49
				ZB4BV013	34
				ZB4BV013E	34
				ZB4BV013S	34
				ZB4BV18B1	47
				ZB4BV18B3	47
				ZB4BV18B4	47
				ZB4BV18B5	47
				ZB4BV18B6	47
				ZB4BV18G1	47
				ZB4BV18G3	47
				ZB4BV18G4	47
				ZB4BV18G5	47
				ZB4BV18G6	47
				ZB4BV18M1	47
				ZB4BV18M3	47
				ZB4BV18M4	47
				ZB4BV18M5	47
				ZB4BV18M6	47
				ZB4BV033	34
				ZB4BV033E	34
				ZB4BV033S	34
				ZB4BV043	34
				ZB4BV043E	34
				ZB4BV043S	34
				ZB4BV053	34
				ZB4BV053E	34
				ZB4BV053S	34
				ZB4BV063	34
				ZB4BV063E	34
				ZB4BV063S	34
				ZB4BV156	49
				ZB4BVB●	46
				ZB4BVB1156	47
				ZB4BVB3156	47
				ZB4BVB4156	47
				ZB4BVB5156	47
				ZB4BVB6156	47
				ZB4BVBG●	46
				ZB4BVG●	46
				ZB4BVG35	40
				ZB4BVG45	40
				ZB4BVJ1	46
				ZB4BVJ3	46
				ZB4BVJ4	46
				ZB4BVJ5	46
				ZB4BVJ6	46
				ZB4BVM1	46
				ZB4BVM3	46
				ZB4BVM4	46
				ZB4BVM5	46
				ZB4BVM6	46
				ZB4BW0B●●	44
				ZB4BW0G●●	44
				ZB4BW0M●●	45
				ZB4BW03D●●	48
				ZB4BW7A9	20
				ZB4BW7A1715	20
				ZB4BW7A1720	20
				ZB4BW7A1721	20
				ZB4BW7A1724	20
				ZB4BW7A3740	20
				ZB4BW7A3741	20
				ZB4BW7L3740	20
				ZB4BW7L3741	20
				ZB4BW11	19
				ZB4BW11S	19
				ZB4BW13	19
				ZB4BW13S	19
				ZB4BW14	19
				ZB4BW14S	19
				ZB4BW15	19
				ZB4BW15S	19
				ZB4BW16	19
				ZB4BW16S	19
				ZB4BW17	19
				ZB4BW17S	19
				ZB4BW31	19
				ZB4BW031	48
				ZB4BW31S	19
				ZB4BW33	19
				ZB4BW33S	19
				ZB4BW34	19
				ZB4BW34S	19
				ZB4BW35	19
				ZB4BW035	48
				ZB4BW35S	19
				ZB4BW36	19
				ZB4BW36S	19
				ZB4BW37	19
				ZB4BW37S	19
				ZB4BW041	48
				ZB4BW045	48
				ZB4BW051	48
				ZB4BW055	48
				ZB4BW061	48
				ZB4BW062	48
				ZB4BW063	48
				ZB4BW065	48
				ZB4BW113	18
				ZB4BW113S	18
				ZB4BW133	18
				ZB4BW133S	18
				ZB4BW143	18
				ZB4BW143S	18
				ZB4BW153	18
				ZB4BW153S	18
				ZB4BW163	18
				ZB4BW163S	18
				ZB4BW313	18
				ZB4BW313S	18
				ZB4BW333	18
				ZB4BW333S	18
				ZB4BW343	18
				ZB4BW343S	18
				ZB4BW353	18

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ZB4BW353S	18	ZB4SZ37	59	ZBL4	50	ZBW9343	51	ZBY912●	25	
ZB4BW363	18	ZB5SZ3	59	ZBL5	50	ZBW9353	51	ZBY9130	57	
ZB4BW363S	18	ZBA●	50	ZBL6	50	ZBW9363	51	ZBY9130T	58	
ZB4BW413	22	ZBA●●●	50	ZBL9	50	ZBY001	38	ZBY9140	57	
ZB4BW433	22	ZBA2934	50	ZBL138	50		40	ZBY9140T	58	
ZB4BW443	22	ZBA2935	50	ZBP0	51		42	ZBY9160	57	
ZB4BW453	22	ZBD8D1	61	ZBP0A	51	ZBY2H101	52	ZBY9160T	58	
ZB4BW463	22	ZBDA185	61	ZBP011	51	ZBY4H101	52	ZBY9220	25	
ZB4BW513	18	ZBDD2	61	ZBP012	51	ZBY6H101	56	58	ZBY9230	57
ZB4BW533	18	ZBDLU●	61	ZBP013	51	ZBY6H102	56	ZBY9230T	58	
ZB4BW543	18	ZBDLU10	61	ZBP014	51	ZBY0101	54	ZBY9260	57	
ZB4BW553	18	ZBDLU11	61	ZBP015	51	ZBY0102	54	ZBY9260T	58	
ZB4BW563	18	ZBDLU12	61	ZBP016	51	ZBY0104	52	ZBY9320	25	
ZB4BW613	23	ZBDLU13	61	ZBP017	51	ZBY00104	54	58	ZBY9330	57
ZB4BW633	23	ZBDLU14	61	ZBPA	51	ZBY0123	52	ZBY9330T	58	
ZB4BW643	24	ZBE●●●	39	ZBV5B	39	ZBY00123	54	ZBY9360	57	
ZB4BW653	23		41	ZBV6	49	ZBY0140	54	ZBY9360T	58	
ZB4BW663	23		59	ZBV011	51	ZBY110●	57	ZBY9420	25	
ZB4BW913	18	ZBE000	59	ZBV013	51	ZBY1115	57	58	ZBY9430	57
ZB4BW933	18	ZBE1013	42	ZBV014	51	ZBY1116	57	ZBY9460	57	
ZB4BW943	18	ZBE1014	43	ZBV015	51	ZBY1146	57	ZBY9620	25	
ZB4BW953	18	ZBE1015	40	ZBV016	51	ZBY1147	57	58	ZBY9630	57
ZB4BW963	18	ZBE1016	38	ZBV017	51	ZBY1148	57	ZBY9660	57	
ZB4BX2	23	ZBE1016P	38	ZBV18B●	39	ZBY1149	57	ZBY55130	56	
ZB4BX84	24	ZBE1016P3	42	ZBV18G●	39	ZBY1203	57	ZBY55330	56	
ZB4BZ007	59	ZBE1023	42	ZBV18M●	39	ZBY1204	57	ZBY22420001	53	
ZB4BZ009	38	ZBE1024	43	ZBV0103S	51	ZBY1207	57	ZBY022420001	55	
	40	ZBE1025	40	ZBV0113	51	ZBY1208	57	ZBZ001	38	
	41	ZBE1026	38	ZBV0133	51	ZBY1214	57	42	ZBZ003	59
	43	ZBE1026P	38	ZBV0143	51	ZBY1303	57	ZBZ006	41	
ZB4BZ011	59	ZBE1026P3	42	ZBV0153	51	ZBY1304	57	ZBZ007	59	
ZB4BZ012	59	ZBE2013	42	ZBV0163	51	ZBY1311	57	ZBZ8	60	
ZB4BZ62	58	ZBE2023	42	ZBVB●	39	ZBY1312	57	ZBZ010	41	
ZB4BZ64	58	ZBE2033	42	ZBVB●●	40	ZBY1316	57	ZBZ011	41	
ZB4BZ65	58	ZBE2043	42		41	ZBY1912	57	ZBZ012	41	
ZB4BZ66	58	ZBE2053	42		43	ZBY21●●	52	ZBZ●●	24	
ZB4BZ0077	59	ZBE5013	42	ZBVBG●	39	ZBY021●●	54	52	ZBZ003	59
ZB4BZ079	41	ZBE5023	42	ZBVG●	39	ZBY22●●	53	ZBZ006	41	
ZB4BZ101	38	ZBE5033	42	ZBVG●●	40	ZBY022●●	55	ZBZ007	59	
ZB4BZ102	38	ZBE5043	42		43	ZBY23●●	53	ZBZ8	60	
ZB4BZ103	38	ZBE5053	42	ZBVJ●	39	ZBY023●●	55	ZBZ010	41	
ZB4BZ104	38	ZBE7016	41	ZBVJ●●	40	ZBY4100	55	ZBZ011	41	
ZB4BZ105	38	ZBE7026	41	ZBVM●	39	ZBY4101	52	ZBZ012	41	
ZB4BZ106	38	ZBE10163	42	ZBVM●●	40	ZBY4140	52	24	ZBZ●●	52
ZB4BZ107	38	ZBE10263	42		43	ZBY5100	56	56	ZBZ003	59
ZB4BZ0117	59	ZBG421E	61	ZBW911	51	ZBY5101	56	ZBZ006	41	
ZB4BZ141	38	ZBG421EP	61	ZBW913	51	ZBY5102	56	ZBZ007	59	
ZB4BZ1013	42	ZBG455	61	ZBW914	51	ZBY6101	56	ZBZ8	60	
ZB4BZ1014	43	ZBG455P	61	ZBW915	51	ZBY6102	56	ZBZ010	41	
ZB4BZ1015	40	ZBG458A	61	ZBW916	51	ZBY6140	56	ZBZ011	41	
ZB4BZ1023	42	ZBG458AP	61	ZBW917	51	ZBY8101	57	ZBZ012	41	
ZB4BZ1024	43	ZBG520E	61	ZBW931	51	ZBY8130	57	24	ZBZ●●	52
ZB4BZ1025	40	ZBG520EP	61	ZBW933	51	ZBY8140	57	56	ZBZ003	59
ZB4BZ1033	42	ZBG2201	37	ZBW934	51	ZBY8160	57	58	ZBZ006	41
ZB4BZ1034	43	ZBG2401	37	ZBW935	51	ZBY8230	57	ZBZ007	59	
ZB4BZ1035	40	ZBG3131A	61	ZBW936	51	ZBY8260	57	ZBZ8	60	
ZB4BZ1043	42	ZBG3131AP	61	ZBW937	51	ZBY8330	57	ZBZ010	41	
ZB4BZ1044	43	ZBG4201	37	ZBW9113	51	ZBY8360	57	ZBZ011	41	
ZB4BZ1045	40	ZBG4401	37	ZBW9133	51	ZBY8430	57	ZBZ012	41	
ZB4BZ1053	42	ZBGK	61	ZBW9143	51	ZBY8460	57	24	ZBZ●●	52
ZB4BZ1054	43	ZBGP	61	ZBW9153	51	ZBY8630	57	56	ZBZ003	59
ZB4BZ1055	40	ZBL1	50	ZBW9163	51	ZBY8660	57	ZBZ006	41	
ZB4BZ1414	43	ZBL2	50	ZBW9313	51	ZBY9101	57	ZBZ007	59	
ZB4SZ3	59	ZBL3	50	ZBW9333	51	ZBY9101T	58	ZBZ8	60	

WWW.100Y.COM.TW



**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

[www.schneider-electric.com/control](http://www.schneider-electric.com/control)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric  
Printed by: