
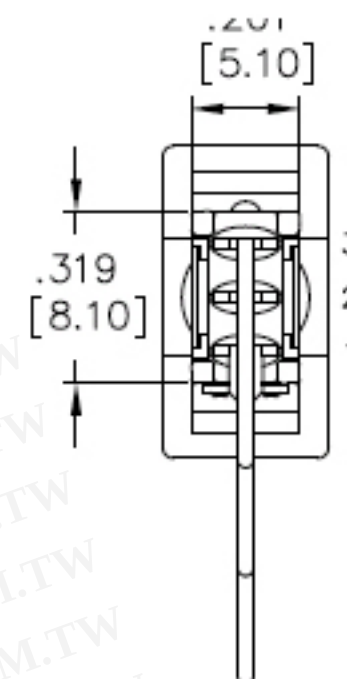
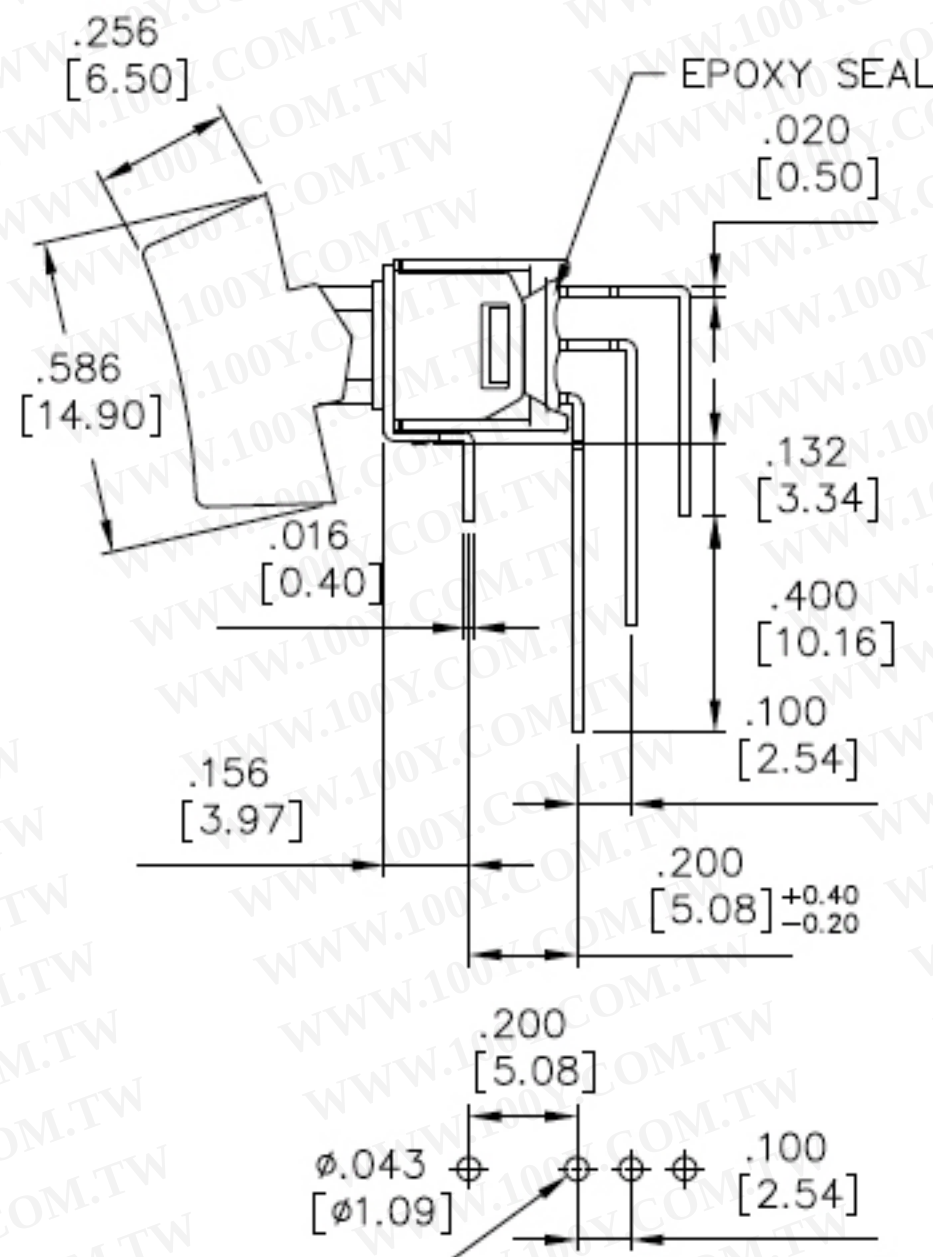


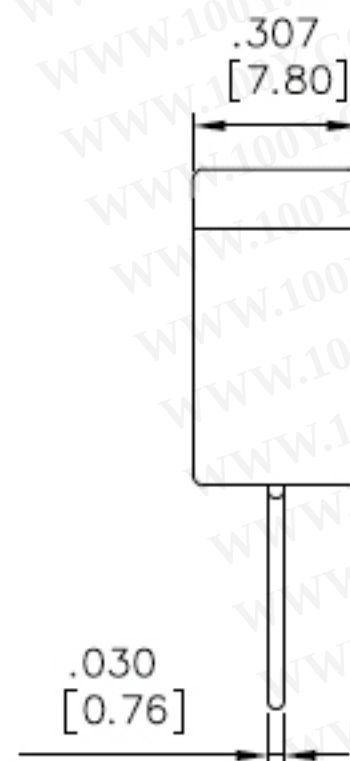

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATIONS:

- 1.MOVABLE CONTACT: Copper alloy, silver plated
- 2.TERMINALS: Copper alloy, silver plated
- 3.RATING: 3Amps with resistive load @ 125VAC or 28VDC
1.5Amps with resistive load @ 250VAC
- 4.CONTACT RESISTANCE: 20m-ohms max. initial
- 5.INSULATION RESISTANCE: 1,000M-ohms min.
- 6.DIELECTRIC STRENGTH: 1,500V RMS @ sea level
- 7.ELECTRICAL LIFE: 30,000 make and break cycles at full load
- 8.OPERATING TEMPERATURE: -30°C to +85°C


Model No.	Switching Position		
	ON	NONE	ON
MSP-1	ON	NONE	ON
MSP-2	ON	NONE	(ON)
MSP-3	ON	OFF	ON
MSP-4	(ON)	OFF	(ON)
MSP-5	ON	OFF	(ON)
TERM. COMM.	2-3	OPEN	2-1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TAIWAY ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF TAIWAY ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°	
DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.20mm
30.01 TO 80.00mm	±0.25mm
80.01 TO 150.00mm	±0.30mm
150.01 +	±0.40mm

USED 用途	400	
FINISH 處理		
SCALE 比例	2 / 1	UNIT 單位 in(mm)
TITLE 名稱	ROCKER SWITCH	
DWG NO. 圖號	400-MSP-1-R102M7QE	
FILE NAME 檔案名稱	4MS17QE-NEW.DWG	SHEET 1 / 1
REV. 更改	2	

ITEM NO. 料號	400-MSP-1-R102M7QE 4MS1R102M7QE
-------------	------------------------------------

MATERIAL



SIZE 圖紙 A4