
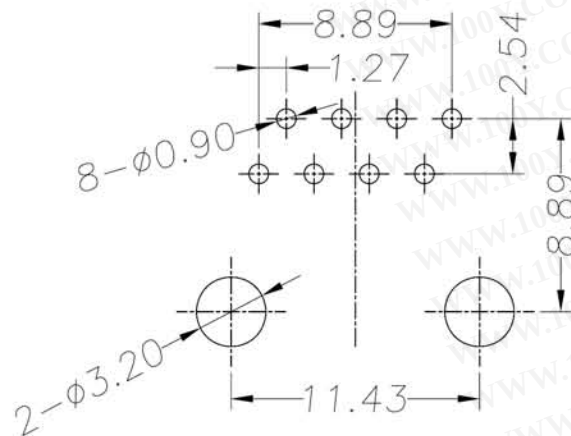


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

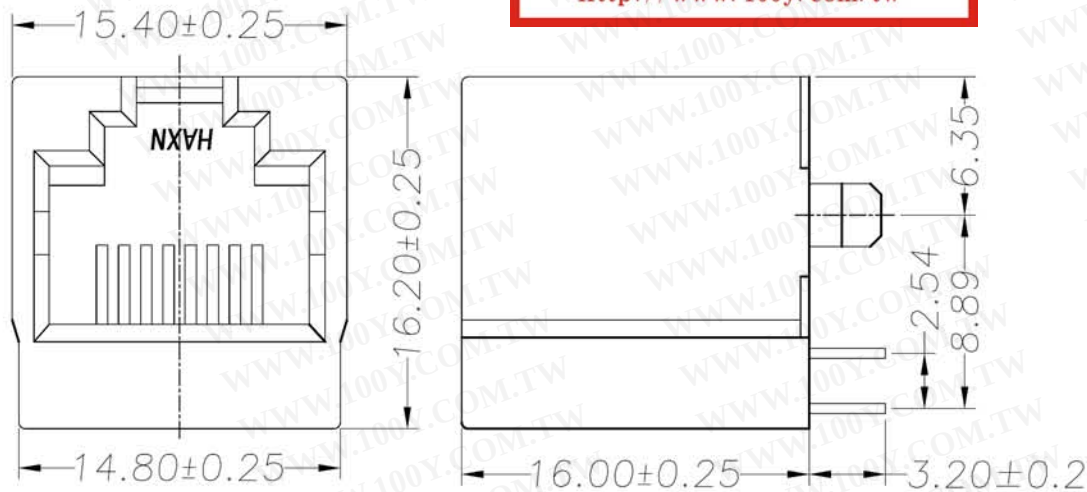

PC Board Layout

PART NUMBER:

5224-011880X1XX

5224 SERIES PCB JACK
(5224系列PCB接口)

SHIELD (屏蔽壳): 1-W/O SHIELD (非屏)
2-HALF SHIELD (半包); 3-FULL SHIELD (全包)
PORTS (插口):

1-1X1 (一口), 4-1X4 (四口), 8-1X8 (八口)

POSITIONS (金针位置):

4-4POSITIONS (4P); 6-6POSITIONS (6P)
8-8POSITIONS (8P); 0-10POSITIONS (10P)

CONTACTS (金针根数): 4-4CONTACTS (4C)
6-6CONTACTS (6C); 8-8CONTACTS (8C); 0-10CONTACTS (10C)

PEG/TAB (边定位铁脚):

0-W/O PEG (无铁脚); 1-FRONT PEG 3.05 (前脚3.05); 2-FRONT PEG3.68 (前脚3.68)
3-FRONT PEG4.57 (前脚4.57); 4-BACK PEG3.05 (后脚3.05)

NOTES:

MATERIAL:

- 1.HOUSING MATERIAL :GLASS FILLED POLYESTER(UL94V-0).
- 2.CONTACT MATERIAL :PHOSPHOR BRONZE φ0.46mm (C5100).
- 3.PLATING :GOLD PLATING OVER NICKEL.

ELECTRICAL:

- 1.VOLTAGE RATING :125 VAC RMS.
- 2.CURRENT RATING :1.5 AMP.
- 3.CONTACT RESISTANCE :50 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE :500 MEGOHMS MIN @ 500V DC.
- 5.DIELECTRIC WITHSTANDING RESISTANCE :1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

- 1.DURRABILITY :750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER :1 LB MIN.

ENVIRONMENTAL:

- 1.STORAGE : -40°C TO +85°C.
 2. OPERATION : 0°C TO 70°C.
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68,SUBPART F.

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
△		原始版本	PEILEI	05.08.10
△		增加料号,更改图号增加 "HAXN"	xushiyong	07.02.05

GOLD PLATING (镀金厚度)
1-F U", 2-1.5U", 3-3U", 4-6U",
5-15U", 6-30U", 7-50U"

LOGO (标识):
0-W/O LOGO (无标识).
1-W/ HAXN (有HAXN标识)
2-W/ UL (有UL标识).
3-W/ HAXN, UL (有HAXN, UL)

COLOR (颜色): 1-BLACK (黑色), 2-WHITE (白色)

PLASTIC (塑料):
1-PBT, 2-NYLON66 (尼龙66), 3-NYLON46 (尼龙46).

MM (INCH)		设计 peilei	日期 05.08.10
一般公差		审核 GANBO	日期 05.08.10
MM	±	批准 xushiyong	日期 05.08.10
.0 ± 0.20	±	材料:	
.00 ± 0.15	±	数量:	
.000 ± 0.075	±	表面处理:	
角度 ± 0.01°		比例: 1:1	
第三角视图		图号 B ED-HX-5224-8P-001	料号 请查注释

系列 52 名称 522401-8P8C-1X1

图号 B ED-HX-5224-8P-001

料号 请查注释

不 按 比 例

共 页 第 页