

Surface Mount RF Transformer

50Ω

0.04 to 80 MHz

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

JT-1975+
 JT-1975



CASE STYLE: BH292

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

PRIMARY DOT	1
PRIMARY	3
SECONDARY DOT	6
SECONDARY	4
SECONDARY CT	5
NOT USED	2

Features

- excellent return loss, 20 dB typ. in 1 dB bandwidth
- excellent amplitude unbalance, 0.05 dB typ. and phase unbalance, 1.0 deg. typ. in 1 dB bandwidth

Applications

- impedance matching
- balanced amplifiers

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
2.5	0.04-80	0.04-80	0.05-60	0.1-30	1	2	0.05	0.2

* Insertion Loss is referenced to mid-band loss, 0.2 dB typ.

Outline Drawing

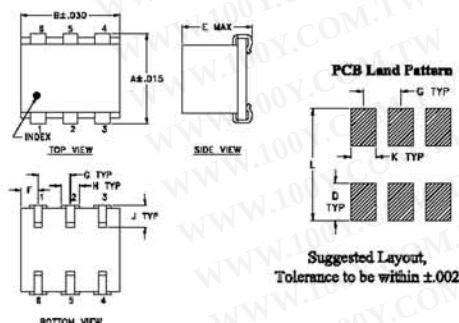

Outline Dimensions (inch)




A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
0.03	0.33	14.60	0.01	0.13
0.05	0.22	18.75	0.01	0.09
0.07	0.19	21.58	0.01	0.06
0.10	0.18	24.55	0.01	0.05
1.00	0.16	34.88	0.01	0.08
10.00	0.22	23.43	0.00	0.42
16.75	0.29	19.49	0.01	0.66
20.00	0.33	18.11	0.01	0.78
60.00	1.07	9.71	0.14	2.45
80.00	1.65	7.72	0.26	3.54

Config. A

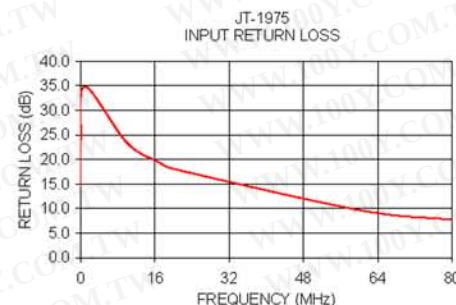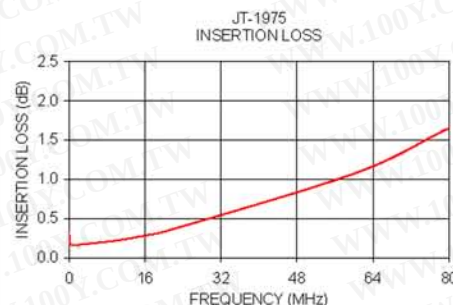

Mini-Circuits®
 ISO 9001 ISO 14001 AS 9100 CERTIFIED

The Design Engineers Search Engine



Provides ACTUAL Data Instantly at minicircuits.com

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCStore/terms.jsp.

REV. B
 M98898
 JT-1975
 EDR-1975
 WZTD/CP/AM
 070718