


支持 CC2530,CC2540,不支持 CC2541

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>



- 发货清单: 1、SmartRF04EB仿真器 *1
2、优质10P下载连接线 *1
3、优质全铜芯usb线一条 *1

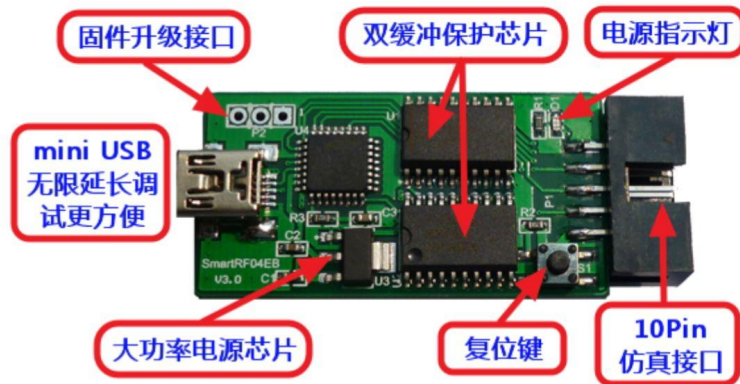

【SmartRF04EB简介】

SmartRF04EB, CC系列无线芯片调试工具, 可以用于CC11xx、CC24xx、CC25xx等多个系列, 支持常用多种调试手段如下载、仿真、调试、断点、单步、全速、擦除、读取、加密等, 支持协议分析;

可以与IAR for MCS-51 编译器进行连接, 如IAR730B、IAR751、IAR760、IAR810;

支持如下工具软件: SmartRF Studio、SmartRF Flash Programmer、IEEE Address Programmer、Packet Sniffer;

支持操作系统: XP、WIN7、WIN8;

【产品特点及性能】

电路不简化, 双缓冲输出, 大功率电源芯片, 稳定, 可靠, 兼容国内大多数模块引脚;

自动识别速度, 下载速度高达150KB/S;


输出3.3V电压可直接驱动目标板;

10Pin接口定义为TI官方标准版:

【产品特点】

七星

必须 GND	1	2	Target Voltage Sense	10Pin接口为TI官方标准版
必须 DC (Debug Clock)	3	4	DD (Debug Data)	必须 GND/DC/DD/RESET
CSn (SPI Chip Select)	5	6	SCLK (SPI Clock)	必须连接的引脚, 若想支持Packet Sniffer
必须 RESETn	7	8	MOSI (SPI Data Out)	软件, 其余SPI引脚也要连接。
3.3V (from debugger)	9	10	MISO (SPI Data In)	

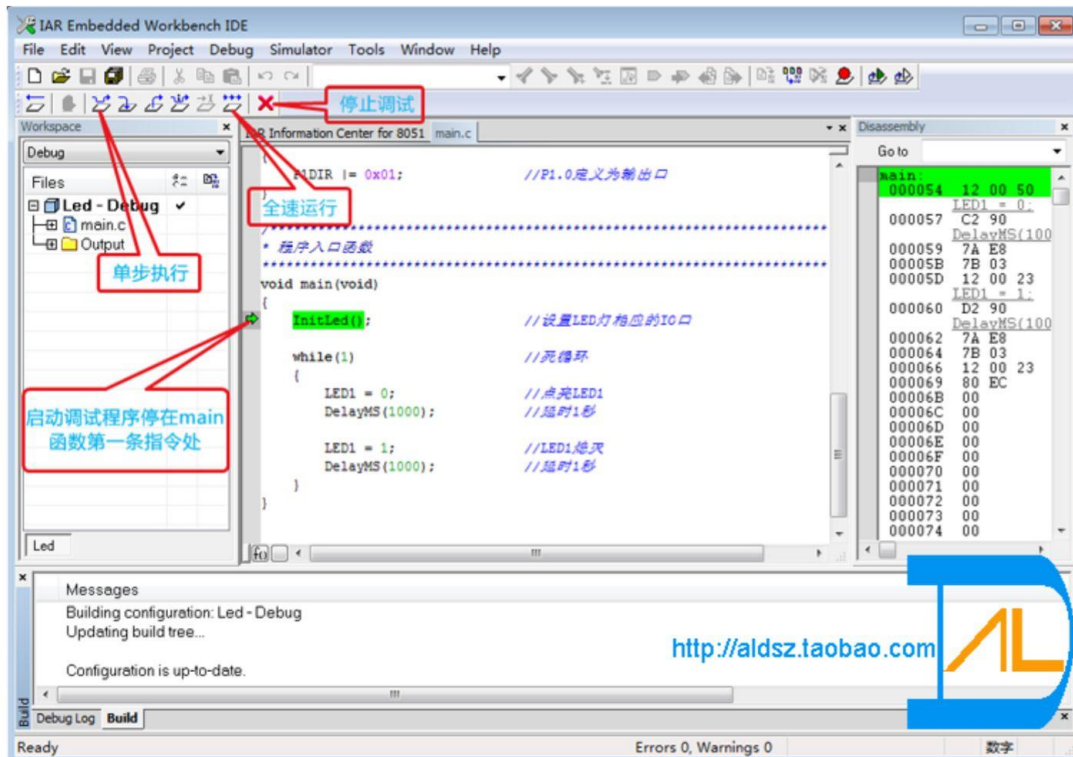

Texas Instruments SmartRF Packet Sniffer IEEE 802.15.4 MAC and ZigBee 2007/PRO

File Settings Help

</

支持CC2540, 不支持2541哦, 购买时请注意

Texas Instruments SmartRF? Flash Programmer

System-on-Chip | EB application (USB) | EB application (serial) | EB bootloader | MSP430

EB ID	Chip type	EB type	EB firmware ID	EB firmware rev
0050	CC2540	SmartRF04EB	0400	0045

Interface: Slow

Flash image: C:\Users\vald\Desktop\出厂程序\项目固件\Coordinator.hex

Read IEEE | **Write IEEE** | Location: Primary | IEEE 0x:

☐ Retain IEEE address when reprogramming the chip

View Info Page

Actions:

- ☒ Erase and program
- ☐ Erase, program and verify
- ☐ Append and verify
- ☐ Verify against hex-file
- ☐ Read flash into hex-file

Flash lock (effective after program/append):

Write protect:

☐ Block debug commands (incl. read access)

NB: Cannot "Append and verify" when set!

Perform actions