

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw



FLIR TG167

Spot Thermal Camera

The FLIR TG167 Spot Thermal Camera bridges the gap between single spot infrared thermometers and FLIR's legendary thermal cameras. Equipped with FLIR's exclusive Lepton® micro thermal sensor, the TG167 lets you see the heat so you know where to reliably measure it. Designed for indoor electrical inspection, the TG167 will help you easily find unseen hot and cold spots in electrical cabinets or switch boxes, giving you quality image detail on even small connectors and wires. Then you can store images and download data to show customers and include in reports.

See the Heat™ - Speed Electrical Troubleshooting.

FLIR's Innovative Lepton® IR Imaging Engine

- Instantly shows what's hot and where to aim
- Eliminates blind guesswork
- 24:1 spot size ratio for safer distance measuring

Grab and Go Simplicity.


Fire It Up and Get to Work in Seconds

- Intuitive to operate with no special training required
- Easily save images and data for documentation
- Download images fast over USB or from removable micro SD


Rugged and Reliable.

Designed for the Harshest Environments

- Built to withstand a 2 meter drop
- Covered by FLIR's exclusive 2-10 warranty
- Compact and durable to easily stow in a crowded tool bag

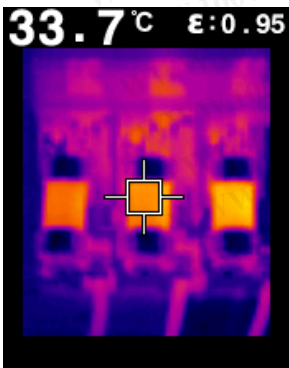

Electrical Troubleshooting

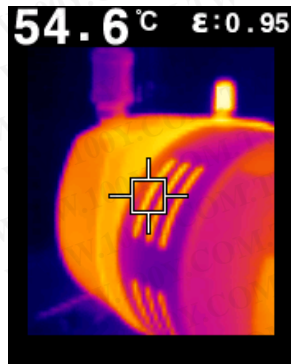

Mechanical Overheating

Specifications

Imaging and optical data	
IR resolution	80 × 60 pixels
Thermal sensitivity/NETD	< 150 mK
Field of view (FOV)	25° × 19.6°
Minimum focus distance	0.1 m (4 in.)
Distance to spot ratio	24:01:00
Image frequency	9 Hz
Focus	Focus free
Detector type	Focal plane array (FPA), uncooled microbolometer
Spectral range	8–14 μm
Display	2.0 in. TFT LCD
Object temperature range	–25 to +380°C (–13 to +716°F)
Accuracy	±1.5% or 1.5°C (2.7°F)
Minimum measurement distance	26 cm (10 in.)
Center spot	Yes
Color palettes	Hot Iron, Rainbow, Grayscale
Memory type	Micro SD card
Image storage capacity	75 000 pictures with included 8 GB Micro SD card
Memory expansion	32 GB SD card maximum
Saved image format	Bitmap (BMP) image with temperature and emissivity
Laser	Dual diverging lasers indicate the temperature measurement area, activated by pulling the trigger
General	
Battery type	Rechargeable Li ion battery
Battery voltage	3.7 V
Battery operating time	>5 hours of continuous scanning with lasers
Battery charge life	30 days minimum
Camera weight, incl. battery	0.312 kg (11 oz.)
Camera size (L × W × H)	186 mm × 55 mm × 94 mm (7.3 in. × 2.2 in. × 3.7 in.)
Tripod mounting	1/4 in.–20 on handle bottom
Includes	Wrist strap lanyard, 8 GB Micro SD card, power supply with separate USB cable, printed documentation

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information	UPC	EAN
FLIR TG167 Spot Thermal Camera	845188011505	07332558010815
FLIR TA13 EVA Protective Case for TG165	793950377727	0793950377727
FLIR TA14 Belt Holster for TG165	793950377741	0793950377741

USA-NASHUA

FLIR Systems, Inc.
 9 Townsend West
 Nashua, NH 03063
 USA
 PH: +1 866.477.3687

USA-PORTLAND

Corporate Headquarters
 FLIR Systems, Inc.
 27700 SW Parkway Ave.
 Wilsonville, OR 97070
 USA
 PH: +1 866.477.3687

EUROPE

FLIR Systems
 Luxemburgstraat 2
 2321 Meer
 Belgium
 PH: +32 (0) 3665 5100

www.flir.com
 NASDAQ: FLIR

UNITED KINGDOM

FLIR Systems UK
 2 Kings Hill Av. - Kings Hill
 West Malling
 Kent
 ME19 4AQ
 United Kingdom
 Tel.: +44 (0)1732 220 011
 Fax: +44 (0)1732 843 707
 E-mail: flir@flir.com

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2015 FLIR Systems, Inc. All rights reserved. (Updated 09/22/15)