


TSIC-U101 Mini USB Thermo-Hygrometer

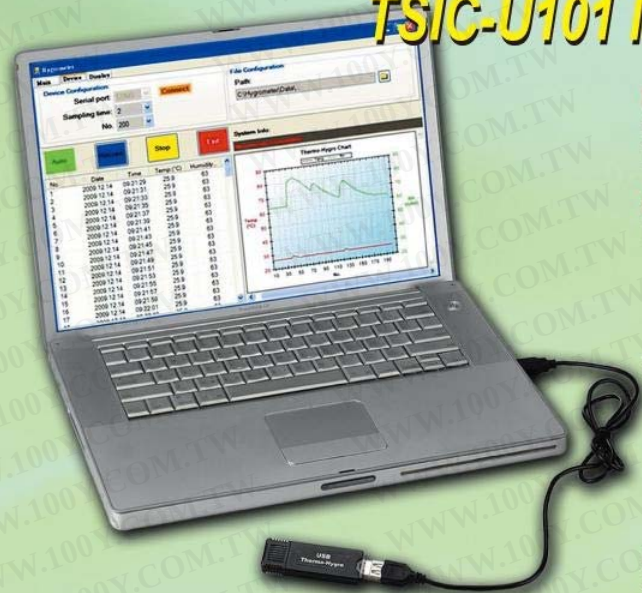

FEATURES:


Humidity : 10%RH ~ 95%RH
Temperature : -20°C ~ +65.0°C (-4°F ~ +149°F)

SPECIFICATIONS:

Temperature : Measuring Range -20°C ~ +65.0°C (-4°F ~ +149°F)
Accuracy ±1°C (0°C ~ +40°C)
Resolution 0.1°C (0.1°F)
Sampling Time program setting (2, 5, 10, 20, 30Sec)

Humidity : Measuring Range 10%RH ~ 95%RH
Accuracy 30%RH ~ 80%RH
(±3%RH +1 digital at +25°C)
Others within 5%RH
Resolution 1%RH
Sampling Time program setting (2, 5, 10, 20, 30Sec)

PC Interface : USB 2.0 compatible virtual com port (RS232 mode)
Operation Condition : Temperature 0°C ~ +65°C, Humidity 10%RH~95%RH
Storage Condition : Recommend 0°C ~ +40°C, < 90%RH
Software Function : Display 、 Storage 、 Recorder 、 Setting 、 Chart....
USB cable & software included.
Reg. No. M385685

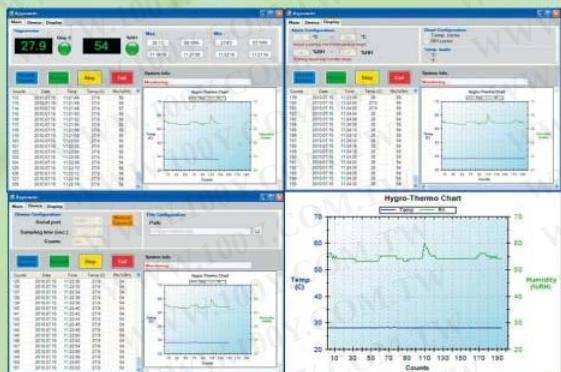

9606U USB Thermo-Hygrometer

FEATURES:


Humidity 10%RH ~ 95%RH
Temperature -20°C ~ +65.0°C (-4°F ~ +149°F)
Uncomfortable Indicator COLD/HOT, DRY/WET

SPECIFICATIONS:

Temperature : Measuring Range -20°C ~ +65.0°C (-4°F ~ +149°F)
Accuracy ±1°C (0°C ~ +40°C)
Resolution 0.1°C (0.1°F)
Sampling Time program setting (2, 5, 10, 20, 30Sec)

Humidity : Measuring Range 10%RH ~ 95%RH
Accuracy 30%RH ~ 80%RH
(±3%RH +1 digital at +25°C)
Others within 5%RH
Resolution 1%RH
Sampling Time program setting (2, 5, 10, 20, 30Sec)

LCD: 95mm X 27mm
Power: UM-4 1.5V (AAA) x 2 or USB power
Low Power Indicator < 2.8V
PC Interface: USB 2.0 compatible virtual com port (RS232 mode)
Operation Condition : Temperature 0°C ~ +65°C, Humidity 10%RH ~ 95%RH
Storage Condition : Recommend 0°C ~ +40°C, < 90%RH
Software Function : Display 、 Storage 、 Recorder 、 Setting 、 Chart....
USB cable & software included.
Patent Pending

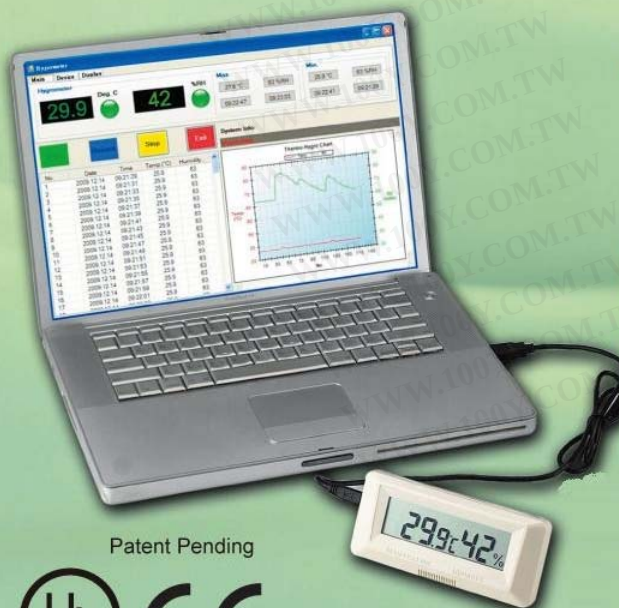

Patent Pending



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)