


Panel meter


FREQUENCY METER

Model : FC-422D

ISO-9001, CE, IEC1010

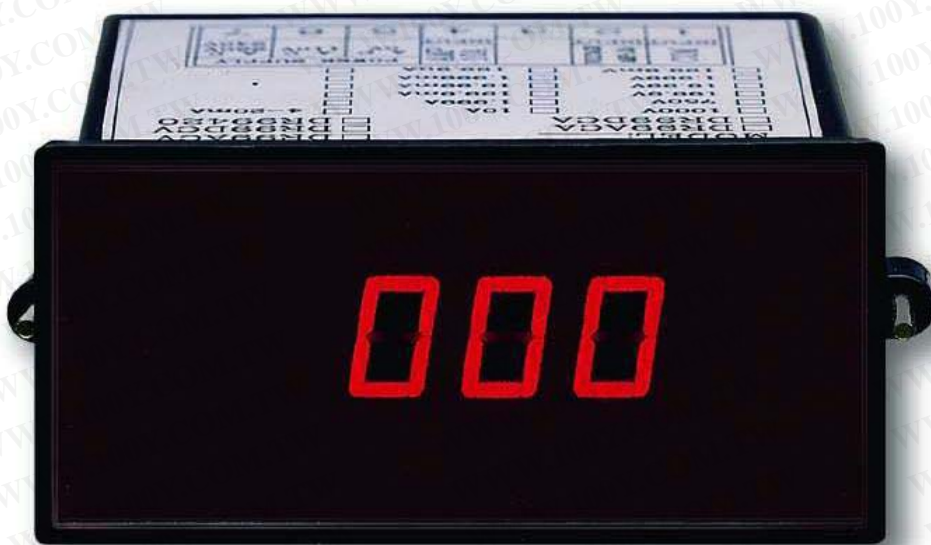

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Lutron

LUTRON ELECTRONIC

The Art of Measurement

PANEL FREQUENCY METER

Model : FC-422D

SPECIFICATIONS	
Display	14.3 mm (0.56") high brightness red red LED. 4 digits.
Frequency Range	0.5 to 500.0 Hz.
Resolution	0.01 Hz \geq 100 Hz,
	0.1 Hz $<$ 100 Hz.
Input Voltage	5 to 250 ACV.
Accuracy	\pm (0.05% + 1 d).
Sampling Time	1 sec.- over 1 Hz.
Operating Temp.	0 to 50°C (32 to 122 °F).
Operating Humidity	Less than 80% RH.
Power Supply	AC 110V, AC220V, 50/60 Hz (or 230V internal adjustment).
Power Consumption.	Approx. AC 16 mA (AC 110V power). Approx. AC 9 mA (AC 220V/230 power).

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DIMENSION		
Case Size	Front panel	96 mm x 48 mm
	Case	92 mm x 42 mm
	Depth	behind panel 104 mm.
Panel cut size	93 mm x 43 mm	
Standard	DIN standard.	

* Appearance and specifications listed in this brochure are subject to change without notice.

0604-FC422D