






A
B
C
D
E
F
G
H

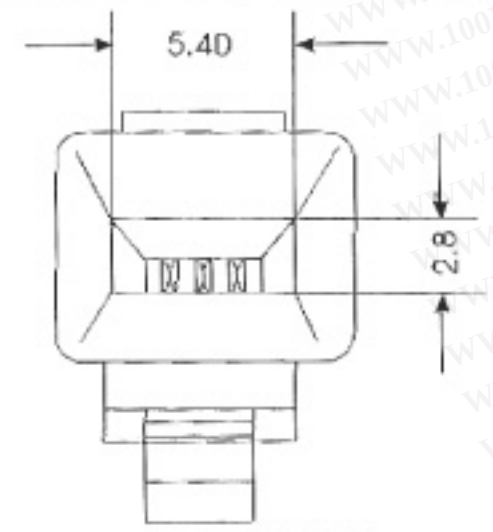

WITH FLAT CABLE

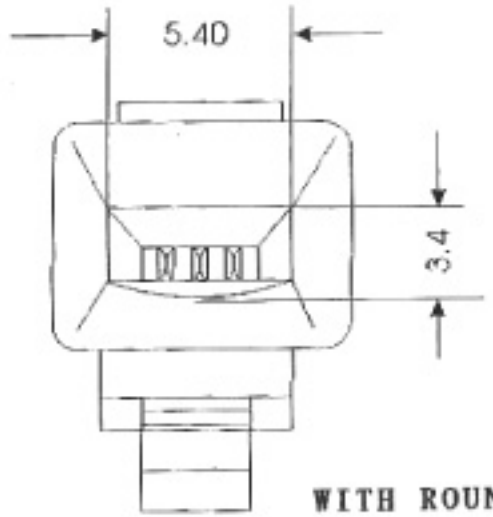

WITH ROUND CABLE

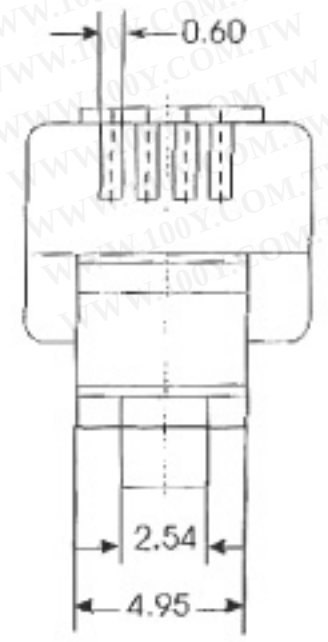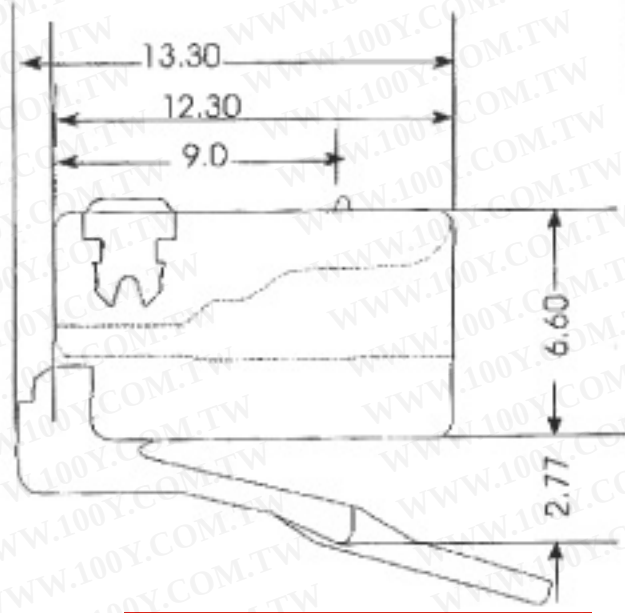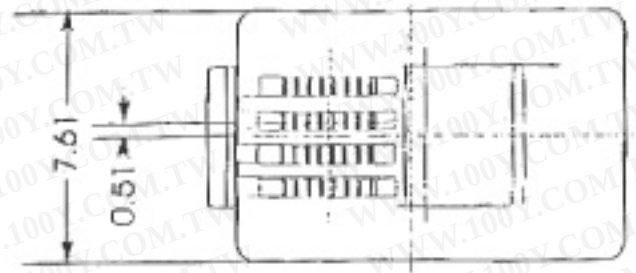

SPECIFICATIONS:

1.ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITH STANDING VOLTAGE : 500 VOLTS AC.
INSULATION RESISTANCE: 500
TERMINATION: RESISTANCE 35 MEGAOHMS.

2.MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20 lbs (89N) MIN.
DURABILITY : 2500 MATING CYCLES.

3.MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR : (TRANSPARENT COLOR AVAILABLE).
CONTACT BLADE: PHOSPHOR BRONZE
CONDUCTOR : STRANDED, 24-26 AWG.
GOLD PLATING: 3-50u" ARE AVAILABLE

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

			UNIT		SCALE	PART NAME	
			MM		2 : 1	MODULAR PLUG 4P4C	
			APPD.	CKD.	TOLERANCE	PART NO.	REV.
製表日:2000/05/14	DWG.	APPROVED			± 0.5		A
	TINA						

1 2 3 4 5 6 7 8