

International IOR Rectifier

60EPU02
60APU02

Ultrafast Soft Recovery Diode

Features

- Ultrafast Recovery
- 175°C Operating Junction Temperature

Benefits

- Reduced RFI and EMI
- Higher Frequency Operation
- Reduced Snubbing
- Reduced Parts Count

$$t_{rr} = 35ns$$
$$I_{F(AV)} = 60Amp$$
$$V_R = 200V$$

Description/ Applications

These diodes are optimized to reduce losses and EMI/ RFI in high frequency power conditioning systems. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are not significant portion of the total losses.

Absolute Maximum Ratings

Parameters	Max	Units
V_R Cathode to Anode Voltage	200	V
$I_{F(AV)}$ Continuous Forward Current, $T_C = 127^\circ C$	60	A
I_{FSM} Single Pulse Forward Current, $T_C = 25^\circ C$	800	
$I_{FRM} \text{ ①}$ Maximum Repetitive Forward Current	120	
T_J, T_{STG} Operating Junction and Storage Temperatures	- 55 to 175	$^\circ C$

① Square Wave, 20kHz

Case Styles

60EPU02  BASE COMMON CATHODE 2 1 CATHODE 3 ANODE TO-247AC (Modified)	60APU02  BASE COMMON CATHODE 2 1 ANODE 3 ANODE TO-247AC
--	--

60EPU02/ 60APU02

Bulletin PD-20739 rev. C 05/01

International
IR Rectifier

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
V_{BR}, V_r Breakdown Voltage, Blocking Voltage	200	-	-	V	$I_R = 100\mu\text{A}$
V_F Forward Voltage	-	0.98	1.08	V	$I_F = 60\text{A}$
	-	0.81	0.88	V	$I_F = 60\text{A}, T_J = 175^\circ\text{C}$
I_R Reverse Leakage Current	-	-	50	μA	$V_R = V_R \text{ Rated}$
	-	-	2	mA	$T_J = 150^\circ\text{C}, V_R = V_R \text{ Rated}$
C_T Junction Capacitance	-	87	-	pF	$V_R = 200\text{V}$
L_S Series Inductance	-	8.0	-	nH	Measured lead to lead 5mm from package body

Dynamic Recovery Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

Parameters	Min	Typ	Max	Units	Test Conditions
t_{rr} Reverse Recovery Time	-	-	35	ns	$I_F = 1.0\text{A}, di_F/dt = 200\text{A}/\mu\text{s}, V_R = 30\text{V}$
	-	28	-		$T_J = 25^\circ\text{C}$
	-	50	-		$T_J = 125^\circ\text{C}$
I_{RRM} Peak Recovery Current	-	4	-	A	$T_J = 25^\circ\text{C}$
	-	8	-		$T_J = 125^\circ\text{C}$
Q_{rr} Reverse Recovery Charge	-	59	-	nC	$T_J = 25^\circ\text{C}$
	-	220	-		$T_J = 125^\circ\text{C}$

Thermal - Mechanical Characteristics

Parameters	Min	Typ	Max	Units
R_{thJC} Thermal Resistance, Junction to Case			0.70	K/W
$R_{thCS} \text{ ②}$ Thermal Resistance, Case to Heatsink		0.2		
W_t Weight		5.5		g
		0.2		(oz)
T Mounting Torque			1.2	N*m

② Mounting Surface, Flat, Smooth and Greased

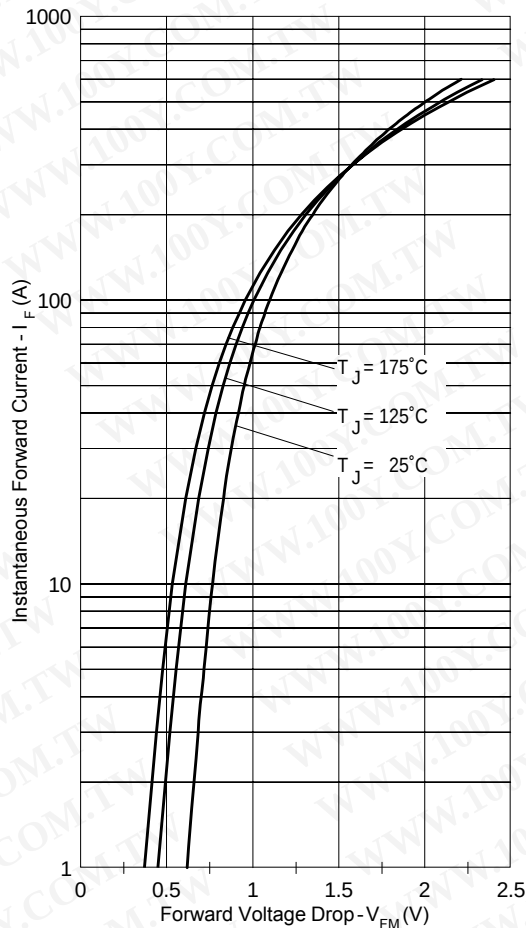


Fig. 1 - Typical Forward Voltage Drop Characteristics

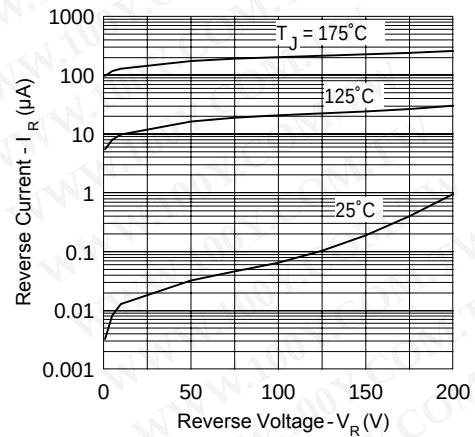


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

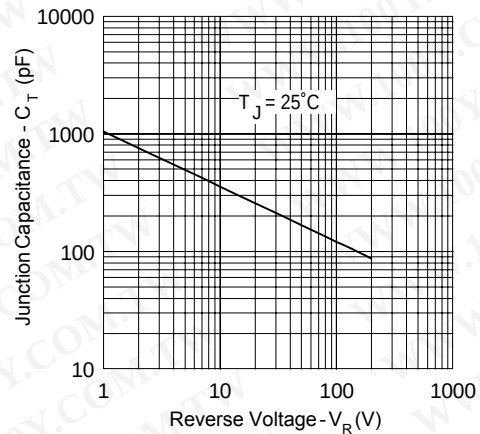


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

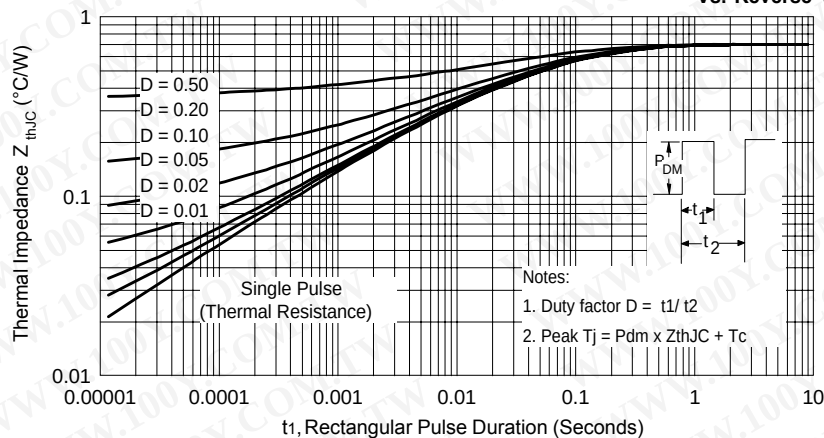


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics

60EPU02/ 60APU02

Bulletin PD-20739 rev. C 05/01

International
IOR Rectifier

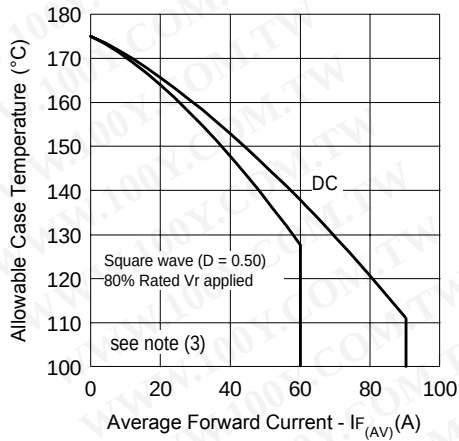


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current

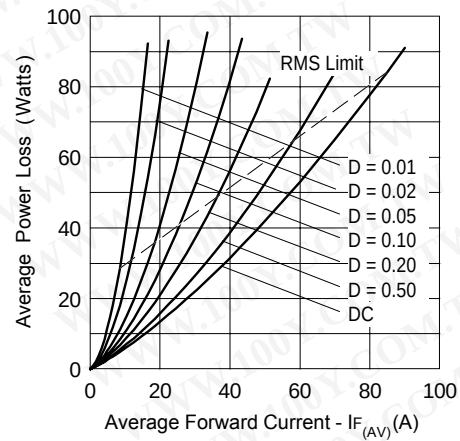


Fig. 6 - Forward Power Loss Characteristics

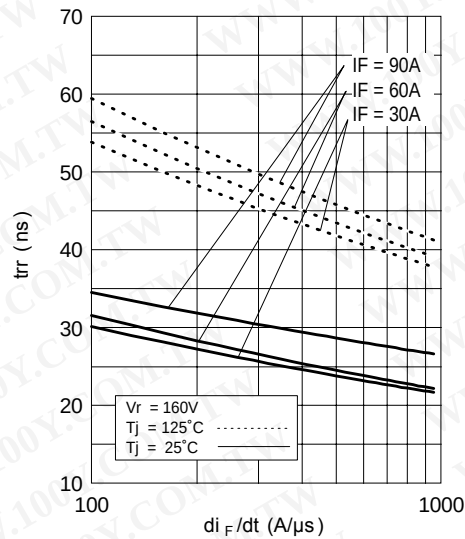


Fig. 7 - Typical Reverse Recovery time vs. di_F/dt

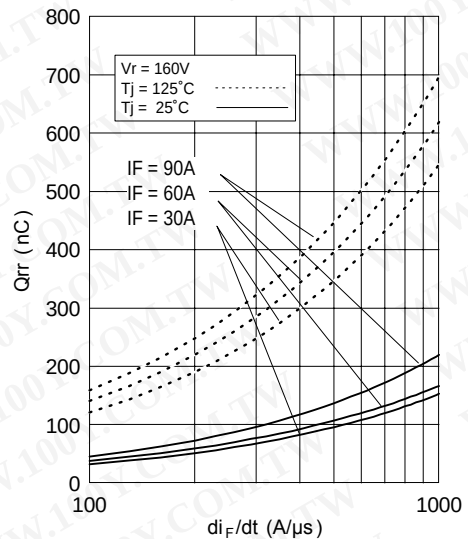


Fig. 8 - Typical Stored Charge vs. di_F/dt

- (3) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 P_d = Forward Power Loss = $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}}$ = Inverse Power Loss = $V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

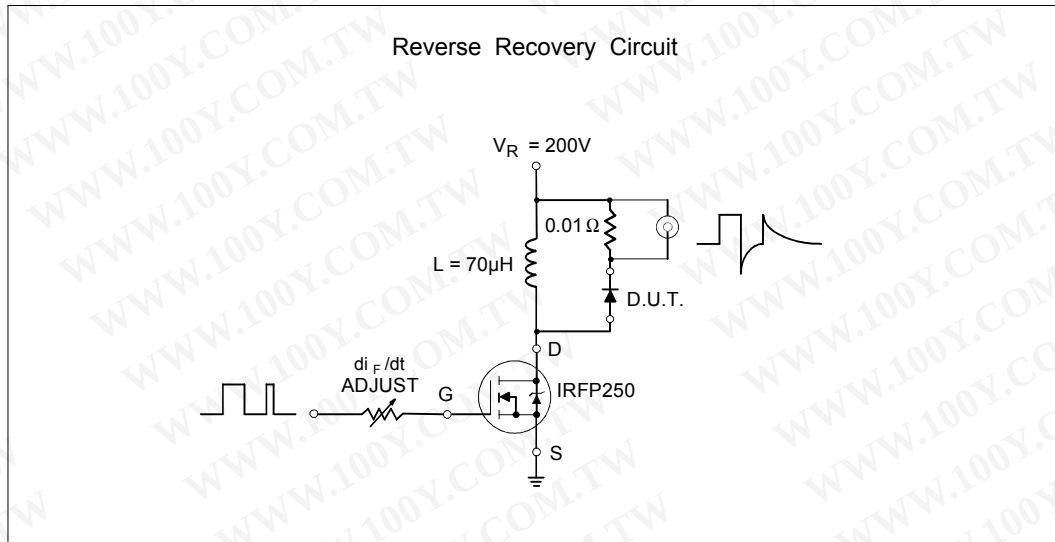


Fig. 9- Reverse Recovery Parameter Test Circuit

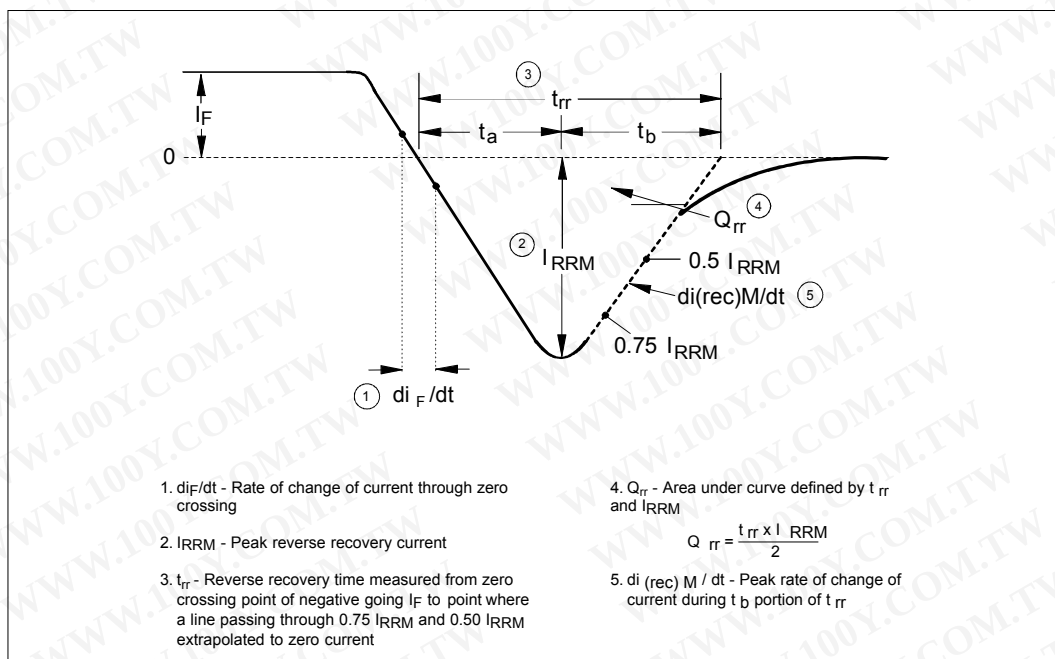



Fig. 10 - Reverse Recovery Waveform and Definitions

60EPU02/ 60APU02


Bulletin PD-20739 rev. C 05/01

International
IOR Rectifier

Outline Table

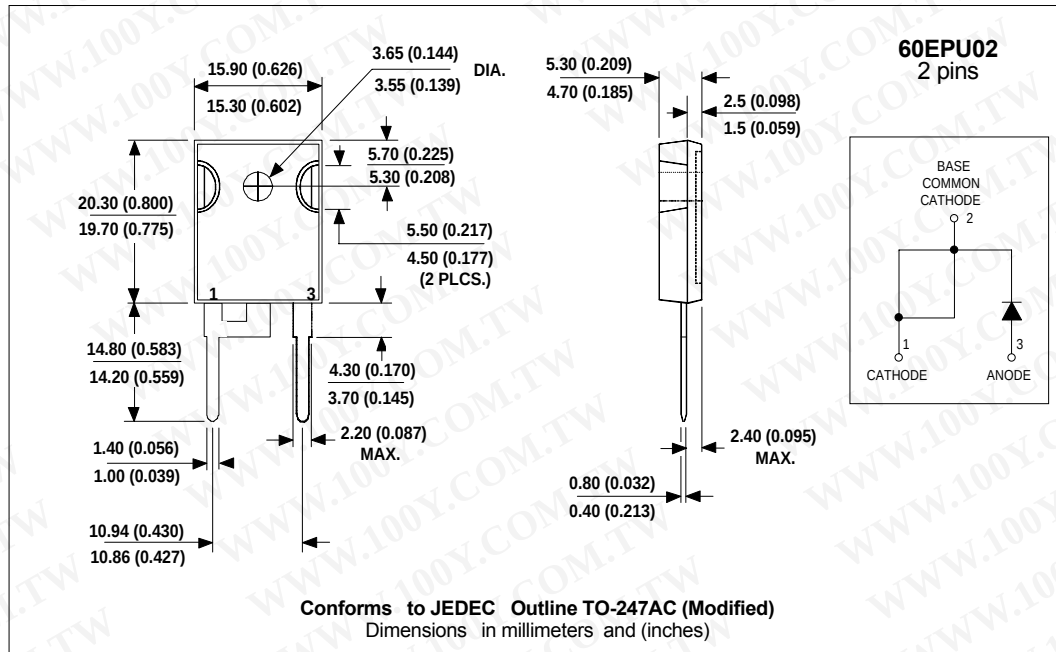

Outline Table

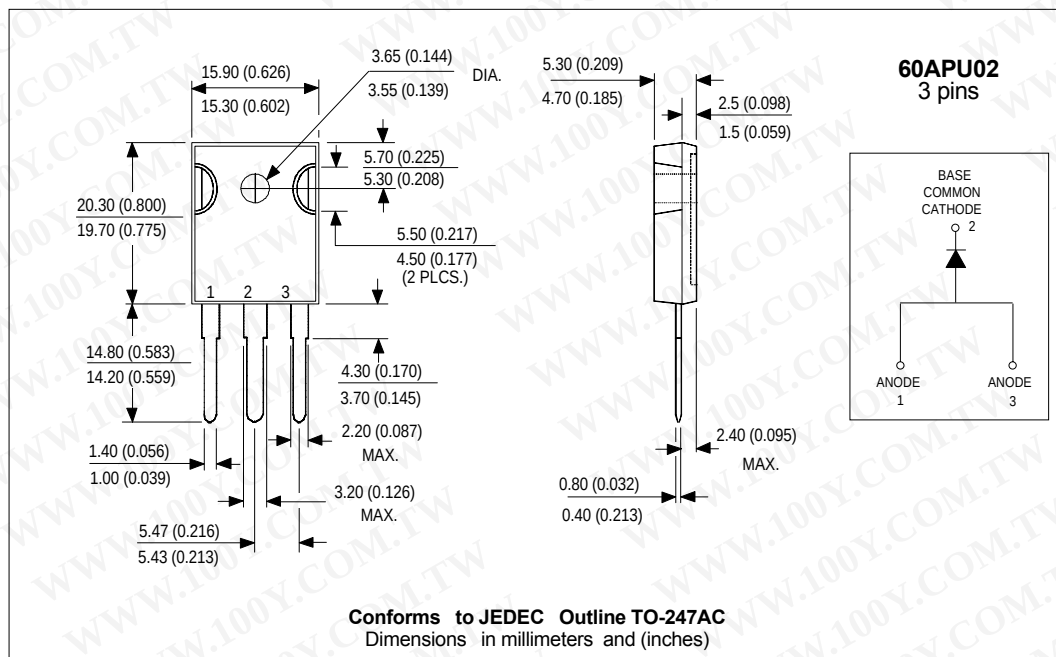

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

International
IR Rectifier

60EPU02/ 60APU02

Bulletin PD-20739 rev. C 05/01

Ordering Information Table

Device Code				
60	E	P	U	02
1	2	3	4	5
1	-	Current Rating	(60 = 60A)	
2	-	Single Diode:	E = Single Diode	
			A = Single Diode (3 pins)	
3	-	TO-247AC (Modified)		
4	-	Ultrafast Recovery		
5	-	Voltage Rating	(02 = 200V)	

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
Visit us at www.irf.com for sales contact information. 05/01