


Flanged plug

IP44 splashproof

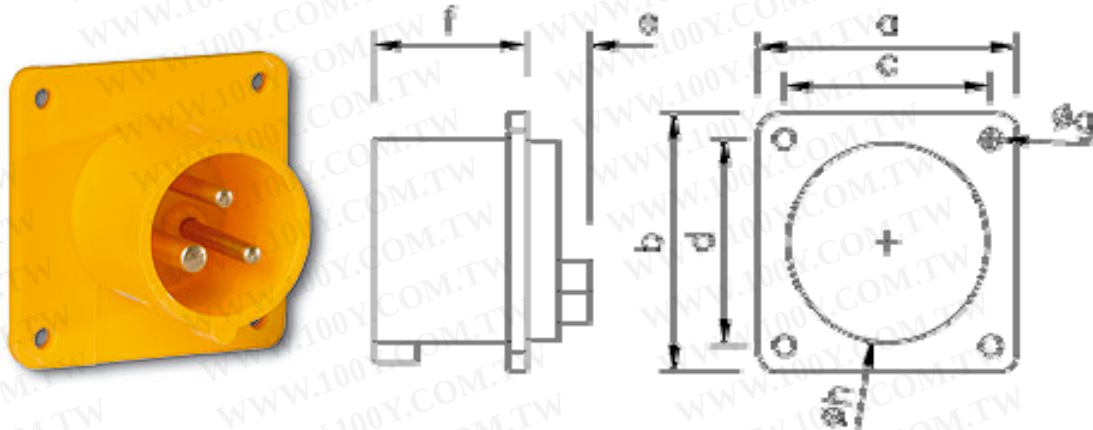

- straight
- According to EN 60309: For correct use a locking device has to be provided
- to order nickel-plated contacts please add a "v" e.g. 613-6v

Dimensions:

Ampere	16	16	16	32	32	32
Poles	3	4	5	3	4	5
Flange a x b	70	70	70	70	70	70
Fix. center c x d	56	56	56	56	56	56
e	25	25	26	30	30	30
f	41	41	42	50	50	50
g	5	5	5	5	5	5
h	43	43	55	55	55	55
Weight	87	100	112	140	160	178

Catalogue Numbers:

Ampere	Poles	110V~ 50/60Hz 4h Cat.No.	230V~ 50/60Hz 3p=6h 4p+5p=9h Cat.No.	400V~ 50/60Hz 3p=9h 4p+5p=6h Cat.No.	500V~ 50/60Hz 7h Cat.No.	>50- 500V~ 100-300Hz 10h Cat.No.	>50- 500V~ 301-500Hz 2h Cat.No.
16	3	613-4	613-6	613-9	613-7	613-10	613-2
16	4	614-4	614-9	614-6	614-7	614-10	614-2
16	5	615-4	615-9	615-6	615-7	615-10	615-2
32	3	623-4	623-6	623-9	623-7	623-10	623-2
32	4	624-4	624-9	624-6	624-7	624-10	624-2
32	5	625-4	625-9	625-6	625-7	625-10	625-2