



M2

◆MATERIAL:PC (UL) / NYLON 66 (UL)


◆FLAME CLASS:94V-2

◆COLOR:NATURAL

◆UNIT:mm

用途:用於固定需絕緣之零件，重量輕，耐腐蝕。

PART NO	A	B	C	D	PACKAGE
M2-3	3.3	1.4	3.0	M2X0.4P	2000
M2-4			4.0		
M2-5			5.0		
M2-6			6.0		
M2-6.5			6.5		
M2-8			8.0		
M2-10			10.0		
★M2-12			12.0		
M2.6-4	4.3	1.5	4.0	M2.6X0.45P	
M2.6-5			5.0		
M2.6-6			6.0		
M2.6-8			8.0		
M2.6-10			10.0		
M3-4	5.5	2.1	4.0	M3X0.5P	1000
M3-5			5.0		
M3-6			6.0		
M3-8			8.0		
M3-10			10.0	M3X0.5P	2000
M3-12			12.0		
M3-15			15.0		
M3-17	7.0	2.5	17.0	M4X0.7P	1000
M3-18			18.0		
M3-20			20.0		
M3-25			25.0		
★M4-6			6.0		
M4-8			8.0		
M4-10			10.0		
M4-12	9.1	3.6	12.0	M5X0.8P	
M4-14			14.0		
M4-16			16.0		
M4-20			20.0		
M4-25			25.0		
M4-30			30.0		
M4-35			35.0		
M5-20	9.1	3.6	20.0	M5X0.8P	
R440-6	5.2	2.4	6.4	4-40 UNC	2000
R440-8			8.0		
R440-9			9.5		1000
R440-12			12.7		
R440-15			15.5		
R440-4SNV0	5.8	1.8	4.75		
R632-6	6.7	2.5	6.35	6-32 UNC	2000
R632-8			8.0		
R632-9			9.5		
R632-12			12.7		1000
R632-15			15.9		
R632-19			19.1		

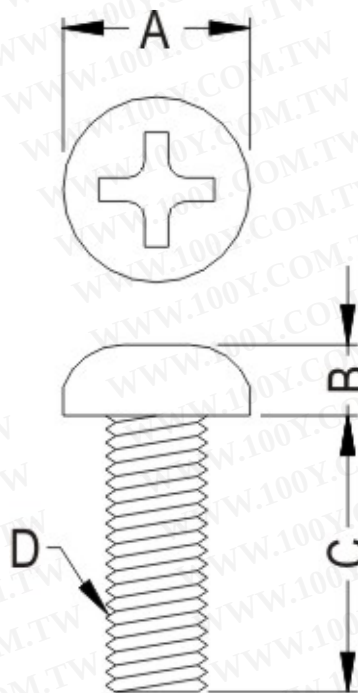

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)