

wiha



Tools that work for you



源自於德國

德國WIHA工具在90年代就進軍台灣，在台灣享有高知名度，也是各大科技產業愛好者，品質優良，也是工具品牌中送禮的優先考量。

目前也是各種產業，機械、電子、航太、汽車、建築、維修站..等 優先指定品牌。

在2010年由德國總公司授權在台總代理正式成立，把所有WIHA產品統整合理後已有以下產品系列。

螺絲起子、精密螺絲起子、六角板手、起子頭、扭力起子、絕緣產品、抗靜電產品、鉗子系列....等

創辦於1939年



Wiha design awards

Ergonomics, highly prized by all.



2013 / iTorque



2013 / MaxxTor



2013 ■



2013 / BitBuddy®



reddot design award winner 2013



Focus Open 2013 Silver



2014 / Magazine Bit Holder LiftUp



reddot award 2014 best of the best





To us, positive feedback from people for whom we make our tools is the most rewarding confirmation of our work. All the same, we can also be more than a little proud when the high ergonomic quality of our products is confirmed at the "highest" level, as many of them have been distinguished with coveted design awards. In addition to this, our company and production quality were also honoured with awards. With this praise and confirmation from every direction, it's no wonder that Wiha are on the right track with ergonomic tool concepts and a future-oriented philosophy.



2014 / BiCut®



reddot award 2014 winner



2015 / Bit Holder CentroFix MagicFlip



2015 / FlipSelector



reddot award 2015 winner



2017 / 2018 / FlipSelector



reddot design award winner 2017



Focus Open 2017 Silver





人體工程學卓越！

德國Wiha是世界第一個工具製造商收到德國AGR 脊椎痠痛預防協會的認證與醫學人士推薦使用產品。具有AGR認證的Wiha工具人體工學卓越-Wiha螺絲起子手柄尺寸設計概念和Wiha Inomic鉗子手柄設計概念。當你是世界上第一家工廠，擁有產品具有著名的AGR認證推薦，這是一種被認可與榮耀。多年來AGR一直致力於促進和研究預防背痛，提供關於有助於預防的產品，預防肌肉骨骼疾病和背部疼痛。





590

SpeedE電動螺絲起子組 set1

Slotted, Phillips, PlusMinus/Pozidriv, 10 pcs in L Boxx Mini with slimBits, batteries and EU charger

Order-No.		
41911	with USB and Europlug	1
42266	with USB and UK plug	1
E-screwdriver handle speedE®		
⊖	slimBit electric bit Slotted, VDE and GS tested / 3,5 x 75 (41159) / 5,5 x 75 (34581)	
⊕	slimBit electric bit Phillips, VDE and GS tested / PH1 x 75 (34583) / PH2 x 75 (34584)	
⊕	slimBit electric bit PlusMinus/Pozidriv, VDE and GS tested / SL/PZ1 x 75 (34589) / SL/PZ2 x 75 (34590)	
Battery set, 18500 Li-ion 2 units in box (41914)		
Charger for 18500 Li-ion batteries (41915)		

easyTorque electric torque adapter



2970

絕緣扭力頭

for slimBits and slimVario® holder in blister

Order-No.	Nm	±%	⊖	⊕		
41341	0,8	10 %	59	5,5	1	1,800
41342	2,0	10 %	59	5,5	1	1,800
41343	2,5	10 %	59	5,5	1	1,800
41344	2,8	10 %	59	5,5	1	1,800
41345	4,0	10 %	59	5,5	1	1,800



Wiha SF通用型 SoftFinish®.



手柄頂端印有螺絲樣式的標誌，選用工具時能一目了然。



增強螺絲起子桿與模塑實心之間連接。



實心鋼帽(鐵頭)內部設計，使用連貫穿透手柄的六角起子桿，在承受敲擊時，不會造成衝擊能量損失。



螺絲起子桿上有附六角設計，如有遇到螺絲栓過緊，可以搭配扳手使用。

- TPR 橡膠
- PP 耐衝擊塑膠
- 德國鉻鉬鋼



302 一字起子(細頭)
SoftFinish® slotted cabinet screwdriver.
Round blade.

Order-No.	①	—	⊖	●	—	+	—	—
00684	2.0	65	0.4	2.0	169	23	10	205
00685	2.5	75	0.4	2.5	179	23	10	205
00686	3.0	80	0.5	3.0	184	23	10	220
00687	3.0	100	0.5	3.0	204	23	10	238
00689	3.0	150	0.5	3.0	254	23	10	273
00690	3.0	200	0.5	3.0	304	23	10	320
32383	3.0	300	0.5	3.0	404	23	5	380
00691	3.5	100	0.6	3.5	204	23	10	238
26931	3.5	200	0.6	3.5	304	23	10	320
00692	4.0	100	0.8	4.0	211	30	10	265
00694	4.0	150	0.8	4.0	261	30	10	280
00695	4.0	200	0.8	4.0	311	30	10	288
00696	4.0	300	0.8	4.0	411	30	5	450
00697	4.5	125	0.8	4.5	236	30	10	280
00698	5.5	125	1.0	5.5	236	30	10	413
00700	5.5	150	1.0	5.5	261	30	10	413
00701	5.5	200	1.0	5.5	311	30	10	450
00702	5.5	300	1.0	5.5	411	30	5	520
32384	6.0	300	1.0	6.0	418	36	5	520

• Additional dimension. Non-DIN size.



302 一字起子(寬頭)
SoftFinish® slotted workshop screwdriver.
Round blade.

Order-No.	①	—	⊖	●	—	+	—	—
27754	6.0	100	1.0	5.5	218	36	10	413
27755	6.0	150	1.0	5.5	268	36	10	450
00704	6.5	100	1.2	6.0	218	36	10	425
00703	6.5	150	1.2	6.0	268	36	10	440
00706	6.5	200	1.2	6.0	318	36	5	500
00708	8.0	150	1.2	7.0	274	41	10	565
00707	8.0	175	1.2	7.0	299	41	5	650
00709	8.0	175	1.6	7.0	299	41	5	650
32399	8.0	300	1.2	7.0	424	41	5	700
00711	10.0	200	1.6	8.0	324	41	5	850
32400	10.0	300	1.6	8.0	424	41	5	900

• Additional dimension. Non-DIN size.



308 一字附六角起子
SoftFinish® slotted screwdriver.
Hex blade with hex bolster.



Order-No.	①	—	⊖	●	○	—	+	—	—
00731	3.5	75	0.6	4.0	-	186	30	10	273
00732	4.5	90	0.8	4.0	-	201	30	10	355
00733	5.5	100	1.0	5.0	8	213	36	10	500
00734	6.5	125	1.2	6.0	10	238	36	10	543
00735	7.0	125	1.1	6.0	10	238	36	10	543
00736	8.0	150	1.2	8.0	13	268	41	10	720
00737	9.0	150	1.4	8.0	13	268	41	10	750
00738	10.0	175	1.6	8.0	13	293	41	5	950
00739	12.0	200	2.0	10.0	16	318	41	5	1,200
00740	14.0	250	2.5	10.0	16	368	41	5	1,400

• Additional dimension. Non-DIN size.



530 一字鐵頭起子
SoftFinish® slotted screwdriver.
Hex blade with hex bolster,
solid steel cap.



Order-No.	①	—	⊖	●	○	—	+	—	—
03223	3.5	75	0.6	4.0	-	186	30	10	480
03224	4.5	90	0.8	4.0	-	201	30	10	520
03225	5.5	100	1.0	5.0	8	213	36	10	650
03226	6.5	125	1.2	6.0	10	238	36	10	800
03228	8.0	150	1.2	8.0	13	271	41	5	1,100
03230	10.0	175	1.6	8.0	13	296	41	5	1,400
03231	12.0	200	2.0	10.0	16	321	41	5	2,000
03232	14.0	250	2.5	10.0	16	371	41	5	2,200

• Additional dimension. Non-DIN size.



398 一字防脫落起子
SoftFinish® slotted screw-holding screwdriver.
Clamping sleeve holds the screw.

Order-No.	①	—	⊖	—	+	—	—
32867	2.5	75	0.4	186	30	5	800
32869	4.0	125	0.8	243	36	5	1,000
32871	6.0	175	1.2	293	36	5	1,300

Wiha SF通用型 SoftFinish®.



311 十字起子
SoftFinish® Phillips screwdriver.
Round blade.

Order-No.	+	→	●	←	+	→	→
00754	PH0	60	3.0	164	23	10	248
27756	PH0	100	3.0	204	23	10	275
00756	PH1	80	4.5	191	30	10	290
27757	PH1	100	4.5	211	30	10	320
00757	PH1•	200	4.5	311	30	10	380
03738	PH1•	300	4.5	411	30	5	500
00759	PH2	100	6.0	218	36	10	408
27758	PH2	150	6.0	268	36	10	425
00760	PH2•	200	6.0	318	36	5	500
03739	PH2•	300	6.0	418	36	5	600
00762	PH3	150	8.0	274	41	10	600
00763	PH4	200	10.0	324	41	5	900

• Additional dimension. Non-DIN size.



312 十字附六角起子
SoftFinish® Phillips screwdriver.
Hex blade with hex bolster.

Order-No.	+	→	●	○	←	+	→
00764	PH1	80	5.0	8	186	30	400
00765	PH2	100	6.0	10	213	36	525
00766	PH3	150	8.0	13	268	41	800
00767	PH4	200	10.0	16	318	41	1,100



531 十字鐵頭起子
SoftFinish® Phillips screwdriver.
Hex blade with hex bolster,
solid steel cap.

Order-No.	+	→	●	○	←	+	→
03237	PH1	80	5.0	8	186	30	575
03238	PH2	100	6.0	10	213	36	825
03239	PH3	150	8.0	13	268	41	1,300



397 十字防脫落起子
SoftFinish® Phillips screw-holding screwdriver.
Clamping sleeve holds the screw.

Order-No.	+	→	→	+	→
32406	PH0	100	211	30	850
32404	PH1	125	236	36	1,025
32405	PH2	175	286	36	1,200



313 米字起子
SoftFinish® Pozidriv screwdriver.
Round blade.

Order-No.	+	→	●	←	+	→	→
00768	PZ0	60	3.0	164	23	10	350
00770	PZ1	80	4.5	191	30	10	420
00772	PZ2	100	6.0	218	36	10	600
00774	PZ3	150	8.0	274	41	10	900



532 米字鐵頭起子
SoftFinish® Pozidriv screwdriver.
Hex blade with hex bolster,
solid steel cap.

Order-No.	+	→	●	○	←	+	→
03245	PZ1	80	5.0	8	186	30	700
03246	PZ2	100	6.0	10	213	36	950
03247	PZ3	150	8.0	13	268	41	1,400



372 六角軟管套筒起子
SoftFinish® hex nut driver.
Flexible shaft for hard to reach areas.

Order-No.	○	→	+	+	→	→
01439 1	8	150	268	36	12	1,000

INFOBOX:
Wiha SoftFinish® screwdriver

- The convenient expert for dry applications.
- The SoftFinish® handle provides optimal grip for dry applications in trade and industry.
- The position of the soft and hard zones on the handle also supports the perfect grip for quick and powerful turning.

**362****星型起子**SoftFinish® TORX® screwdriver.
Round blade.

Order-No.	☉	←	●	→	+	←	→
26259	T3	60	2,5	164	23	10	400
26260	T4	60	2,5	164	23	10	400
01285	T5	60	2,5	164	23	10	400
01286	T6	60	3,5	164	23	10	330
01287	T7	60	3,5	164	23	10	330
01288	T8	60	3,5	164	23	10	330
01289	T9	60	4,0	171	30	10	350
01290	T10	80	4,0	191	30	10	350
01291	T15	80	4,0	191	30	10	350
01292	T20	100	4,0	218	36	10	350
01293	T25	100	4,5	218	36	10	380
01294	T27	115	5,5	233	36	10	380
01295	T30	115	6,0	233	36	10	420
01296	T40	130	7,0	254	41	10	420
01297	T45	130	8,0	254	41	5	550

**362BE****星型球頭起子**SoftFinish® TORX® ball end screwdriver.
Hex blade.

Order-No.	☉	←	●	→	+	←	→	
32250	T9	60	7/64	2,8	164	23	10	500
32251	T10	60	1/8	3,2	184	23	10	500
32252	T15	80	9/64	3,6	191	30	10	500
32253	T20	80	5/32	4,0	211	30	10	500
32254	T25	100	3/16	4,8	218	36	10	550
32255	T27	115	7/32	5,6	233	36	10	550
32256	T30	115	1/4	6,4	233	36	10	650

**362R****星型防脫落起子**SoftFinish® TORX® MagicSpring® screwdriver.
Retaining spring holds TORX® screws in place.

Order-No.	☉	←	●	→	+	←	→
27736	T6	60	3,5	164	23	10	500
27737	T7	60	3,5	164	23	10	500
27738	T8	60	3,5	164	23	10	500
27739	T9	60	4,0	171	30	10	500
27740	T10	80	4,0	191	30	10	500
27741	T15	80	4,0	191	30	10	500
27742	T20	100	4,0	218	36	10	500
27743	T25	100	4,5	218	36	10	500
27811	T27	115	5,5	233	36	10	600
27744	T30	115	6,0	233	36	10	600
27745	T40	130	7,0	254	41	10	700

**362TR****星型中洞起子**SoftFinish® TORX® Tamper Resistant screwdriver.
With borehole in the blade tip.
For TORX® screws with locking pin.

Order-No.	☉	←	●	→	+	←	→
03106	T7H	60	3,5	164	23	10	500
03107	T8H	60	3,5	164	23	10	500
03108	T9H	60	4,0	171	30	10	500
26456	T9H	300	4,0	411	30	5	650
01300	T10H	80	4,0	191	30	10	500
26457	T10H	300	4,0	411	30	5	650
01301	T15H	80	4,0	191	30	10	525
26458	T15H	300	5,0	411	30	5	650
01302	T20H	100	4,0	211	30	10	525
28005	T20H	300	5,0	411	30	5	650
01303	T25H	100	4,5	211	30	10	525
01304	T27H	115	5,5	233	36	10	575
01305	T30H	115	6,0	233	36	10	588
01306	T40H	130	7,0	254	41	10	613

• 星型中洞也適用於星型螺絲，但不可顛倒使用。

**362IP****星型圓角起子**SoftFinish® TORX PLUS® screwdriver.
Round blade.

Order-No.	☉	←	●	→	+	←	→
26091	6IP	60	3,5	164	23	10	400
26093	7IP	60	3,5	164	23	10	400
26095	8IP	60	3,5	164	23	10	400
26097	9IP	60	4,0	171	30	10	400
26099	10IP	80	4,0	191	30	10	430
26101	15IP	80	4,0	191	30	10	430
26103	20IP	100	4,0	218	36	10	450
26105	25IP	100	4,5	218	36	10	480
26107	27IP	115	5,5	233	36	10	500
26109	30IP	115	6,0	233	36	10	550
26111	40IP	130	7,0	254	41	10	580

**362RIP****星型防脫落圓角起子**SoftFinish® TORX PLUS® MagicSpring® screwdriver.
Retaining spring holds TORX PLUS® screws in place.

Order-No.	☉	←	●	→	+	←	→
28765	15IP	80	4,0	191	30	10	640

Wiha 小知識**星型防脫落起子**其卡簧的止動彈簧，由不銹鋼製成，可將星型螺絲，安全的固定
在任何位置。
這項發明，讓每個使用者倍感
方便。

Wiha SF通用型 SoftFinish®.



341 六角套筒起子
SoftFinish® hex nut driver.
Round blade. 德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔	↔
01018	4	125	236	30	6,9	10	400
01020	5	125	236	30	7,9	10	400
01021	5.5	125	236	30	7,9	10	400
01022	6	125	236	30	8,9	10	400
01023	7	125	243	36	10,9	10	500
01024	8	125	243	36	11,9	10	520
01025	9	125	243	36	12,9	10	550
01026	10	125	243	36	14,4	10	550
01027	11	125	249	41	15,9	5	700
01028	12	125	249	41	16,9	5	750
01029	13	125	249	41	18,4	5	800
01030	14	125	249	41	19,4	5	850
01033	17	125	249	41	23,4	5	1,100



347 Zoll 英制六角套筒起子
SoftFinish® hex nut driver. Inch sizes.
Round blade with hex bolster.
德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	mm	↔	↔
02836	3/16	125	10	231	30	4,76	8 10 480
02837	1/4	125	10	238	36	6,35	10 10 550
02838	5/16	125	10	238	36	7,94	12 10 600
02839	3/8	125	10	238	36	9,53	14 10 650
02840	7/16	125	13	246	41	11,11	16 10 800
02841	1/2	125	13	246	41	12,70	19 10 850



343 六角套筒短起子
SoftFinish® hex nut driver.
Short round blade.

Order-No.	Ø	↔	↔	↔	↔	↔
01076	5.5	65	176	30	8	10 400
01077	6	65	176	30	9	10 400
01078	7	65	183	36	11	10 520
01079	8	65	183	36	12	10 525
01081	10	65	183	36	14	10 550



305 音響起子
SoftFinish® slotted nut driver.
Round blade. 德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔	↔
32364	M1.7	80	0,5	4,0	184	23	5 500
32363	M2	80	1,0	4,5	184	23	5 500
32362	M2.3	90	1,0	5,0	201	30	5 550
32361	M2.6	90	1,2	5,5	201	30	5 550
32360	M3	100	1,2	6,0	211	30	5 600
32358	M3.5	100	1,4	7,0	218	36	5 650
32359	M4	100	1,4	8,0	218	36	5 750
32357	M5	125	2,0	10,0	243	36	5 900
32356	M6	125	2,5	11,0	243	36	5 1,000
32355	M8	150	3,0	14,0	274	41	5 1,300
32354	M10	150	3,5	18,0	274	41	5 1,500




356 內六角起子
SoftFinish® hex screwdriver.
Hex blade. 德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔
32264	1.5	60	164	23	10	183
32265	2.0	60	164	23	10	183
26190	2.5	75	179	23	10	183
26191	3	75	179	23	10	183
26192	4	75	186	30	10	208
26193	5	75	186	30	10	255
26194	6	100	218	36	10	335
26195	8	100	218	36	10	410




357 90°內六角起子
SoftFinish® offset hex screwdriver.
Hex blade. 德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔
26230	3	35	20	139	23	10 220
26231	4	40	25	151	30	10 250
26232	5	45	28	156	30	10 320
26233	6	50	32	168	36	10 350
26234	8	60	36	178	36	10 480



367 內六角球頭起子
SoftFinish® ball end hex screwdriver.
Hex blade. 德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔
26303	1.5	75	179	23	10	300
26304	2	100	204	23	10	288
26305	2.5	100	204	23	10	288
26328	3	100	204	23	10	288
26329	4	100	211	30	10	300
26330	5	100	211	30	10	325
26331	6	125	243	36	10	400
26332	8	150	268	36	10	580
26333	10	150	271	41	5	720
26307	12	150	271	41	5	950



367R 內六角防脫落球頭起子
SoftFinish® MagicRing® ball end hex screwdriver.
Ring made of spring steel holds hex screws in place.
德國鉻釩鋼.

Order-No.	Ø	↔	↔	↔	↔	↔
26077	3	100	204	23	10	380
26079	4	100	211	30	10	400
26081	5	100	211	30	10	465
26083	6	125	243	36	10	562
26085	8	150	268	36	10	787
26087	10	150	271	41	5	950

**302**

迷你大頭一字起子
SoftFinish® slotted screwdriver.
Short round blade.

Order-No.	①	↔	⊖	●	↔	+	↔	①
26964	4.0	25	0.8	4.0	81	34	10	280
26965	5.5	25	1.0	5.5	81	34	10	280
26966	6.5	25	1.2	6.5	81	34	10	305
26967	8.0	25	1.2	8.0	81	34	10	350

311


迷你大頭十字起子
SoftFinish® Phillips screwdriver.
Short round blade.

Order-No.	⊕	↔	●	↔	+	↔	①
26968	PH1	25	4.5	81	34	10	300
26969	PH2	25	6.0	81	34	10	320
26970	PH3	25	8.0	81	34	10	350

313

迷你大頭米字起子
SoftFinish® Pozidriv screwdriver.
Short round blade.

Order-No.	⊕	↔	●	↔	+	↔	①
26971	PZ1	25	4.5	81	34	10	360
26972	PZ2	25	6.0	81	34	10	400
26973	PZ3	25	8.0	81	34	10	480

**59813 4**

SF 30孔起子架
適用於所有雙色柄系列

Order-No.	↔	↔	↕	①
59813	245	205	165	1 500

**SB 430 4010**

刮除工具組
Universal scraper set.
With 10 razor-edged replacement blades, 13 mm wide.

Order-No.	①	①	①
26920 3	Universal scraper with 1 blade and 10 replacement blades	5	1,500

**302 HK6 SO**

一字 / 十字起子六件組
SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.
Round blades.

Order-No.	Series	①	⊕	①	①	①	①
07152	302 HK6 SO	1	2,100				
①	302	3.5x100	4.5x125	5.5x150	6.5x150		
⊕	311	PH1x80	PH2x100				

**362 K7**

7件星型起子組
SoftFinish® TORX® screwdriver set, 7 pcs.
Round blades.

Order-No.	Series	①	①	①	①	①
01299	362 K7	1	2,400			
⊕	362	T8x60	T9x60	T10x80	T15x80	
		T20x100	T25x100	T30x115		

530 HK6

6件鐵頭一字/十字起子組
SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.
Hex blades with hex bolster, solid steel cap.

Order-No.	Series	①	⊕	①	①	①	①
21250	530 HK6	1	3,800				
①	530	3.5x75	4.5x90	5.5x100	6.5x125		
⊕	531	PH1x80	PH2x100				

362 K6 SO

6件星型起子組
SoftFinish® TORX® screwdriver set, 6 pcs.
Round blades.

Order-No.	Series	①	①	①	①	①
07155	362 K6 SO	1	2,200			
⊕	362	T10x80	T15x80	T20x100	T25x100	
		T30x115	T40x130			

362TR K6

6件星型中洞起子組
SoftFinish® TORX® Tamper Resistant screwdriver set, 6 pcs.
For TORX® screws with locking pin.

Order-No.	Series	①	①	①	①	①
24506	362TR K6	1	3,000			
⊕	362TR	T10Hx80	T15Hx80	T20Hx100	T25Hx100	
		T30Hx115	T40Hx130			

362R K6 SO

6件星型防脫落起子
SoftFinish® TORX® MagicSpring® screwdriver set, 6 pcs.
Retaining spring holds TORX® screws in place.




Order-No.	Series	①	①	①	①	①
27746	362R K6 SO	1	3,000			
⊕	362R	T10x80	T15x80	T20x100	T25x100	
		T30x115	T40x130			

**308 HK6**

6件一字/十字附六角起子組
SoftFinish® slotted/ Phillips screwdriver set, 6 pcs.
Hex blades with hex bolster.

Order-No.	Series	①	⊕	①	①	①
21248	308 HK6	1	2,700			
①	308	3.5x75	4.5x90	5.5x100	7.0x125	
⊕	312	PH1x80	PH2x100			

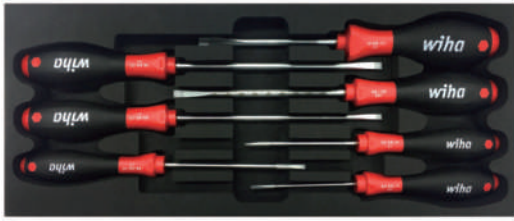

WH00003 6件一字起子組 **2,061**

DU56-E 365 x 146 x 36mm

302	Order-No.	⌀	→	⊖	●	→	→
	00685	2.5	75	0.4	2.0	169	23
	00686	3.0	80	0.5	3.0	184	23
	00691	3.5	100	0.6	3.5	204	23
	00694	4.0	150	0.8	4.0	261	30
	00704	6.5	100	1.2	6.0	218	36


302	Order-No.	⌀	→	⊖	●	→	→
	00698	5.5	125	1.0	5.5	236	30

WH00002 6件一字起子組 **2,061**

DU56-E 365 x 146 x 36mm

302	Order-No.	⌀	→	⊖	●	→	→
	00685	2.5	75	0.4	2.0	169	23
	00686	3.0	80	0.5	3.0	184	23
	00691	3.5	100	0.6	3.5	204	23
	00703	6.5	150	1.2	6.0	268	36

302	Order-No.	⌀	→	⊖	●	→	→
	00692	4.0	100	0.8	4.0	211	30
	00698	5.5	125	1.0	5.5	236	30

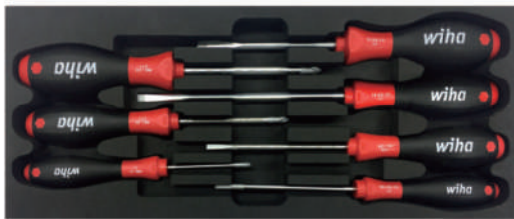

WH00001 7件十字/一字起子組 **2,564**


DU56-E 365 x 146 x 36mm

302	Order-No.	⌀	→	⊖	●	→	→
	00686	3.0	80	0.5	3.0	184	23
	00700	5.5	150	1.0	5.5	261	30
	00703	6.5	150	1.2	6.0	268	36

302	Order-No.	⌀	→	⊖	●	→	→
	00692	4.0	100	0.8	4.0	211	30

311	Order-No.	⊕	→	●	→	→
	00754	PH0	60	3.0	164	23


311	Order-No.	⊕	→	●	→	→
	00756	PH1	80	4.5	191	30
	00759	PH2	100	6.0	218	36

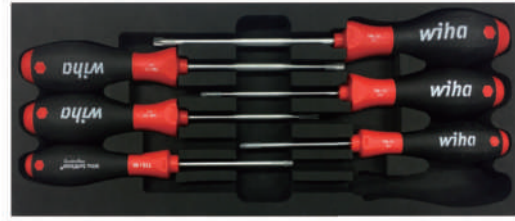

WH00008 6件星型起子組 **2,480**

DU56-E 365 x 146 x 36mm

362	Order-No.	⊛	→	●	→	→
	01290	T10	80	4.0	191	30
	01291	T15	80	4.0	191	30
	01292	T20	100	4.0	218	36
	01293	T25	100	4.5	218	36
	01295	T30	115	6.0	233	36
	01296	T40	130	7.0	254	41

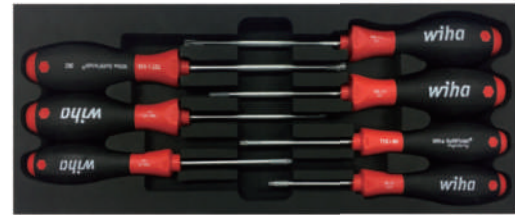

WH00007 7件星型起子組 **2,860**

DU56-E 365 x 146 x 36mm


362	Order-No.	⊛	→	●	→	→
	01289	T9	60	4.0	171	30
	01290	T10	80	4.0	191	30
	01291	T15	80	4.0	191	30
	01292	T20	100	4.0	218	36
	01293	T25	100	4.5	218	36
	01294	T27	115	5.5	233	36
	01295	T30	115	6.0	233	36



WH00006 7件星型起子組 **2,390**

DU56-E 365 x 146 x 36mm

362	Order-No.	⊛	→	●	→	→
	01286	T6	60	3.5	164	23
	01287	T7	60	3.5	164	23
	01288	T8	60	3.5	164	23
	01289	T9	60	4.0	171	30
	01290	T10	80	4.0	191	30
	01291	T15	80	4.0	191	30
	01292	T20	100	4.0	218	36

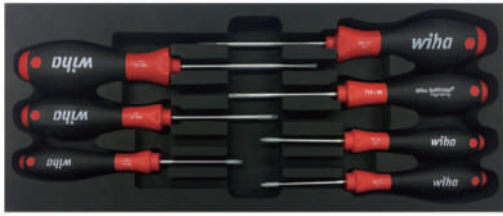

WH00005 7件星型起子組

2,700

DU56-E 365 x 146 x 36mm

362	Order-No.	⊕	⊖	⦿	⦿	⦿	⦿
	01286	T6	60	3.5	164	23	
	01287	T7	60	3.5	164	23	
	01288	T8	60	3.5	164	23	
	01290	T10	80	4.0	191	30	
	01291	T15	80	4.0	191	30	
	01292	T20	100	4.0	218	36	
	01293	T25	100	4.5	218	36	



WH00004 7件一字/十字起子組

2,597

DU56-E 365 x 146 x 36mm

302	Order-No.	⊕	⊖	⦿	⦿	⦿
	00691	3.5	100	0.6	3.5	204
	00697	4.5	125	0.8	4.5	236
	00700	5.5	150	1.0	5.5	261
	00703	6.5	150	1.2	6.0	268

311	Order-No.	⊕	⦿	⦿	⦿
	00754	PH0	60	3.0	164

311	Order-No.	⊕	⦿	⦿	⦿
	00756	PH1	80	4.5	191
	00759	PH2	100	6.0	218



SB 400 10 增消磁器

Magnetiser/ demagnetiser.

泡殼包裝

52 x 50 x 29 mm(b x h x d)

對於增加或消除鋼鐵類工具的磁性

Order-No.	5	500
02568		



308ST 一字不鏽鋼起子

SoftFinish® stainless steel slotted screwdriver.
Hex blade.

Order-No.	⊕	⊖	⦿	⦿	⦿	⦿	
32608 1	5.5	100	1.0	5.5	213	36	10
32609 8	6.5	125	1.2	6.0	238	36	10



312ST 十字不鏽鋼起子

SoftFinish® stainless steel Phillips screwdriver.
Hex blade.

Order-No.	⊕	⦿	⦿	⦿	⦿	
32610 4	PH1	80	5.0	186	30	10



NEW 6件星型不鏽鋼起子組

367ST K6 SO SoftFinish® stainless steel TORX® screwdriver set, 6 pcs.
Hexagon blades.

Order-No.	Series					
32628 9	367ST K6 SO					1
	376ST	T10x80	T15x80	T20x100	T25x100	
		T30x115	T40x130			

Wiha 防油防滑型 Microfinish.



防滑




附六角起子和實心鋼帽(鐵頭)的系列，最適合鬆開過緊的螺絲。



防滑系列的手柄，是用醋酸纖維素製造的，表面結構細微，可以傳遞極大的扭矩。
在潮濕、多油的工作環境下，非常的適用。手柄頂端印有螺絲樣式的標示。

- CA 醋酸纖維
- PP 耐衝擊塑膠
- 德國鉻鉬鋼




5520 防滑一字起子
MicroFinish slotted screwdriver.
Round blade.

Order-No.	⌀	—	⊖	●	—	+	—	—
29115	3.5	100	0.6	3.5	204	23	10	400
29116	4.0	100	0.8	4.0	211	30	10	400
29118	5.5	125	1.0	5.5	236	30	10	480
29120	6.5	150	1.2	6.0	268	36	10	580

• Additional dimension, Non-DIN size.

5521 防滑十字起子
MicroFinish Phillips screwdriver.
Round blade.

Order-No.	⊕	—	●	—	+	—	—
29140	PH0	60	3.0	165	23	10	380
29141	PH1	80	4.5	192	30	10	420
29143	PH2	100	6.0	220	36	10	550

• Additional dimension, Non-DIN size.

5527 防滑星型起子
MicroFinish TORX® screwdriver.
Round blade.

Order-No.	⊛	—	●	—	+	—	—
29162	T10	80	4.0	192	30	10	500
29163	T15	80	4.0	192	30	10	500
29164	T20	100	4.0	212	30	10	500
29165	T25	100	4.5	212	30	10	500

5525 防滑六角起子
MicroFinish hex nut driver.
Round blade.

Order-No.	⊙	—	—	+	—	—
29173	8	125	245	36	11.9	10 720



5520 HK6 防滑7件一字/十字起子組 **2,980**
DU56-E 365 x 146 x 36mm

5520	Order-No.	⌀	—	⊖	●	—	+	—
	29115	3.5	100	0.6	3.5	204	23	
	29116	4.0	100	0.8	4.0	211	30	
	29118	5.5	125	1.0	5.5	236	30	
	29120	6.5	150	1.2	6.0	268	36	

5521	Order-No.	⊕	—	●	—	+	—
	29141	PH1	80	4.5	192	30	
	29143	PH2	100	6.0	220	36	



5534 防滑十字鐵頭起子
MicroFinish Phillips screwdriver.
One-piece hexagon blade with hexagon head, solid steel cap.

Order-No.	⊕	—	●	⊖	—	+	—	—
29149	PH1	80	5.0	8	187	30	10	700
29150	PH2	100	6.0	10	214	36	10	950
29151	PH3	150	8.0	13	271	41	10	1,400

5533 防滑一字鐵頭起子
MicroFinish slotted screwdriver.
One-piece hexagon blade with hexagon head, solid steel cap.

Order-No.	⌀	—	⊖	●	⊖	—	+	—	—
29133	4.5	90	0.8	4.0	-	201	30	10	600
29134	5.5	100	1.0	5.0	8	213	36	10	750
29135	6.5	125	1.2	6.0	10	238	36	10	850
29136	8.0	150	1.2	8.0	13	271	41	5	1,150

• Additional dimension, Non-DIN size.



5520 HK6 防滑一字 / 十字起子六件組
MicroFinish slotted/ Phillips screwdriver set, 6 pcs Round blades

Order-No.	Series	—	—	—	—
29124	5520 HK6	1			2,700
⌀	5520	3.5x100	4.0x100	5.5x125	6.5x150
⊕	5521	PH1x80	PH2x100		

5533 HK5 防滑一字 / 十字鐵頭起子五件組

MicroFinish slotted/ Phillips screwdriver set, 5 pcs. Hex blades with hex bolster, solid steel cap.

Order-No.	Series	—	—	—	—
29138	5533 HK5	1			3,800
⌀	5533	5.5x100	6.5x125	8.0x150	
⊕	5534	PH1x80	PH2x100		

Wiha 木頭柄 Wooden handle.



■ 山毛櫸
■ 德國鉻鈦鋼

起子桿一體成型的設計，附六角起子桿和皮革帽搭配成為特別的專業特色。

加強附六角起子桿設計，可大大加強扭力。



162 HK6 SO 木頭柄一字/十字起子六件組
Wooden slotted/ Phillips screwdriver set, 6 pcs.
Round blades with hex bolster.

Order-No.	Series							
07149	162 HK6 SO						1	1,400
①	162	3.5x75	4.5x90	5.5x100	7.0x125			
⊕	129	PH1x80	PH2x100					



SB 400 10 增消磁器
Magnetiser/ demagnetiser.
泡殼包裝
52 x 50 x 29 mm(b x h x d)
對於增加或消除鋼鐵類工具的磁性。

Order-No.		
02568	5	500



161 雙頭十字扳手
Phillips offset screwdriver with handle.

Order-No.	⊕	⊕	↖	↗	●	
00144	PH1	PH2	125	14.5	5.5	10 330
00145	PH2	PH3	150	21.0	8.0	10 500



207 雙頭一字扳手
Slotted offset screwdriver with handle.

Order-No.	①	⊖	↖	↗	●	
00373	3.5	0.6	90	8.5	3.5	10 270
00374	4.0	0.8	100	9.0	4.0	10 270
00375	5.5	1.0	125	10.5	5.5	10 320
00376	6.5	1.2	125	13.5	6.5	10 350
00377	8.0	1.2	150	17.0	8.0	10 450
00378	10.0	1.6	175	24.0	9.0	10 650
00379	12	2.0	200	27.0	10.0	5 800

• Additional dimension. Non-DIN size.



K430 20 刮除工具
Seal scraper.

Order-No.	↖	↗	↖	↗	
01532	25	150	260	36	10 695



K430 10 調整工具
Trim pin remover.

Order-No.	↖	↗	↖	↗	
01531	7.5	175	285	36	10 695

Wiha 經典型 Classic.

德國 Wiha 水晶 水晶(彩條)手柄方(彩條)堅韌和多途的經典之作。

經典水晶(彩條)螺絲起子手柄耐衝擊·無鏽。

- Acetate 高密度塑膠
- 德國鉻釩鋼

水晶(彩條)手柄方便放置於口袋。



• **301-2** 尖錐起子
Awl with round tip and plastic handle.

Order-No.	●	↔	↔	+	↔	
00683	6.0	100	185	34		10 278



• **300-2** 鑽孔起子
Reamer with square tip and plastic handle.

Order-No.	■	↔	↔	+	↔	
00679	6.0	100	185	34		10 278



500 Slotted pocket screwdriver.

Order-No.	⊙	⊖	●	↔	+	↔	
01537 4	3.0	40	3.0	100	11		50 105
01538 1	3.0	60	3.0	120	11		50 105
01539 8	3.0	80	3.0	140	11		50 105



• **148** 經典一字起子
Classic slotted screwdriver.
Round blade.

Order-No.	⊙	↔	⊖	●	↔	+	↔	
00099	4.5	100	0.7	5.0	195	24		10 310

• **153** 經典十字起子
Classic Phillips screwdriver.
Round blade.

Order-No.	⊕	↔	●	↔	+	↔	
00119	PH3	150	8.0	265	32		10 620



• **186** 經典一字起子
Classic slotted screwdriver.
Round blade.

Order-No.	⊙	↔	⊖	●	↔	+	↔	
00206	3.0	75	0.5	3.0	150	19		10 150
00207	3.0	100	0.5	3.0	175	19		10 170
00208	3.0	150	0.5	3.0	225	19		10 200
00218	5.0	100	0.9	5.0	195	24		10 280
00219	5.0	150	0.9	5.0	245	24		10 300
00220	5.0	200	0.9	5.0	295	24		10 350
00236	10.0	300	1.6	8.0	415	32		5 700



• **360** 經典星型起子
Classic TORX® screwdriver. Round blade.


Order-No.	⊛	↔	●	↔	+	↔	
05280	T5	50	2.5	110	14		10 350
01264	T6	50	3.5	125	19		10 260
01265	T7	60	3.5	125	19		10 280
01266	T8	60	3.5	135	19		10 260
01267	T9	60	4.0	145	22		10 280
01268	T10	80	4.0	175	24		10 280
01269	T15	80	4.0	175	24		10 300
01270	T20	100	4.0	205	28		10 320
01271	T25	100	4.5	205	28		10 340



• **353** 經典內六角起子
Classic hex screwdriver. Hex blade.

Order-No.	⊕	↔	↔	+	↔	
01224	1.5	60	120	14		10 150
01225	2	60	120	14		10 150
01226	2.5	75	150	19		10 150
01227	3	75	150	19		10 150
01228	4	75	160	22		10 160
01229	5	75	170	24		10 208

Wiha 絕緣細頭 SoftFinish® electric slimFix.



超薄技術:
前端起子桿直徑減少33%
·毫不費力的通過深孔的
緊固件和彈簧元件。



手柄頂端印有螺絲樣式的標誌·
選用工具時能一目了然。

- 絕緣塑料材質
- 德國鉻鉬鋼

AC 1000V
IEC 60900:2004



1000 V
IEC 60900:2004

3201 一字絕緣細頭起子

SoftFinish® electric slimFix slotted screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	①	➤	⊕	➤	➤	➤	➤	➤
35446	3.5	100	0,6	204	23			10 500
35390	4.0	100	0,8	211	30			10 600
35391	5.5	125	1,0	243	36			10 700
35392	6.5	150	1,2	268	36			10 900

3211 十字絕緣細頭起子

SoftFinish® electric slimFix Phillips screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	⊕	➤	➤	➤	➤	➤	➤	➤
35393	PH1	80	191	30				10 650
35394	PH2	100	218	36				10 850

3241 米字絕緣細頭起子

SoftFinish® electric slimFix Pozidriv screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	⊕	➤	➤	➤	➤	➤	➤	➤
35395	PZ1	80	191	30				10 750
35396	PZ2	100	218	36				10 1,000

3251 絕緣slim星型起子

SoftFinish® electric slimFix TORX® screwdriver.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	⊕	➤	➤	➤	➤	➤	➤	➤
36536	T10	100	204	23				10 600
36537	T15	100	211	30				10 600
36538	T20	100	211	30				10 650
36539	T25	125	243	36				10 650

3271 絕緣SlimFix Xeno起子 (十字割勾)

SoftFinish® electric slimFix Xeno screwdriver.
For terminal screws (slotted/ Phillips).

Order-No.	⊕	➤	➤	➤	➤	➤	➤	➤
35503	SL/PH2	100	218	36				10 1,000

3281 絕緣SlimFix Xeno起子 (米字割勾)

SoftFinish® electric slimFix Xeno screwdriver.
For terminal screws (slotted/ Pozidriv).

Order-No.	⊕	➤	➤	➤	➤	➤	➤	➤
36329	SL/PZ1	80	191	30				10 880
36330	SL/PZ2	100	218	36				10 1,100



1000 V
IEC 60900:2004

3201 K6 一字/十字絕緣細頭起子六件組

SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 6 pcs.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	Series	➤	➤	➤	➤	➤	➤
35389	3201 K6						1 3,400
①	3201	3.5x100	4.0x100	5.5x125	6.5x150		
⊕	3211	PH1x80	PH2x100				



1000 V
IEC 60900:2012

3251 K6 6件絕緣slim星形起子組

SoftFinish® electric slimFix TORX® screwdriver set, 6-pcs.
Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	Series	➤	➤	➤	➤	➤	➤
36558	3251 K6						1 3,200
⊕	325	T8x60	T9x60				
⊕	3251	T10x100	T15x100	T20x100	T25x125		

AC 1000V
IEC 60900:2004

當使用VDE絕緣工具工作·
需遵守國家的安全和事故預防條例。




Wiha 絕緣型 SoftFinish® electric.



德國Wiha 為帶電性作業的使用者，設計擁有符合特殊需求的細部，並為了保證使用者絕對安全展示其安全性能。此外，SoftFinish®獨特的手柄形狀，讓使用上更加舒適。



手柄頂端印有螺旋樣式的標誌，選用工具時能一目了然。

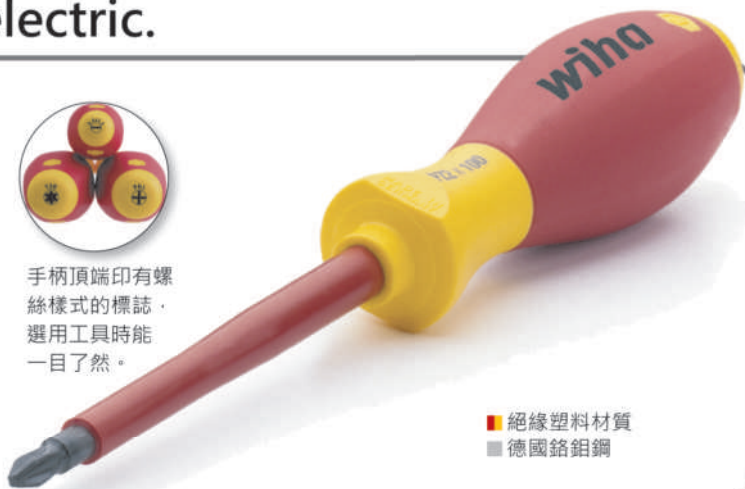

■ 絕緣塑料材質
■ 德國鉻鉬鋼



320N

一字絕緣起子

SoftFinish® electric slotted screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	Ø	—	—	—	—	—	—
00819	2.0	60	0,4	164	23	10	330
00820	2.5	75	0,4	179	23	10	340
00821	3.0	100	0,5	204	23	10	340
00822	3.5	100	0,6	204	23	10	340
00823	4.0	100	0,8	211	30	10	420
00824	4.5	125	1,0	236	30	10	470
00825	4.5	175	1,0	286	30	5	530
31863	4.5	200	1,0	311	30	10	530
00826	5.5	125	1,0	243	36	10	530
00827	5.5	175	1,0	293	36	5	570
00828	6.0	150	1,2	268	36	10	570
00829	6.5	150	1,2	268	36	10	570
00830	8.0	175	1,2	299	41	10	700
00831	8.0	175	1,6	299	41	10	700
00832	10.0	200	1,6	324	41	10	950

• Additional dimension. Non-DIN size.

321N

十字絕緣起子

SoftFinish® electric Phillips screwdriver.

Order-No.	+	—	—	—	—	—	—
00846	PH0	60	164	23	10	400	
00847	PH1	80	191	30	10	480	
00848	PH2	100	218	36	10	540	
00849	PH3	150	268	41	10	730	
00850	PH4	200	318	41	5	1,100	

324

米字絕緣起子

SoftFinish® electric Pozidriv screwdriver.

Order-No.	+	—	—	—	—	—	—
00877	PZ0	60	164	23	10	450	
00878	PZ1	80	191	30	10	530	
00879	PZ2	100	218	36	10	630	
00880	PZ3	150	268	41	5	850	

358N

方形絕緣起子

SoftFinish® electric square (Robertson) screwdriver.

Order-No.	⊕	⊖	—	—	—	—	—
32396	Robertson 1	2,3	100	211	30	10	630
32397	Robertson 2	2,8	150	268	36	10	700

322

六角套筒絕緣起子

SoftFinish® electric hex nut driver.

Order-No.	⊕	—	—	—	—	—	—
00853	4	125	236	30	10,2	10	630
00855	5	125	236	30	11,2	10	630
00856	5.5	125	236	30	11,2	10	630
00857	6	125	236	30	12,2	10	630
00858	7	125	243	36	14,5	10	800
00859	8	125	243	36	15,2	10	800
00860	9	125	243	36	16,0	10	850
00861	10	125	243	36	17,2	10	850
00862	11	125	243	41	19,2	5	1,050
00863	12	125	243	41	20,2	5	1,050
00864	13	125	243	41	22,2	5	1,250
00865	14	125	243	41	23,2	5	1,250
00866	15	125	243	41	25,2	5	1,500
00867	16	125	243	41	25,2	5	1,500
00868	17	125	243	41	27,2	5	1,500

323N

內六角絕緣起子

SoftFinish® electric hex screwdriver.

Order-No.	⊕	—	—	—	—	—	—
30361	2.5	75	179	23	10	500	
30362	3.0	75	179	23	10	520	
30363	4.0	75	186	30	10	620	
30364	5.0	75	186	30	10	620	
30365	6.0	100	218	36	10	680	
30366	8.0	100	218	36	10	850	

325

星型絕緣起子

SoftFinish® electric TORX® screwdriver.
Individually tested protective insulation

Order-No.	⊕	—	—	—	—	—	—
03760	T5	60	164	23	10	500	
03761	T6	60	164	23	10	480	
03762	T7	60	164	23	10	500	
00881	T8	60	164	23	10	500	
00882	T9	60	164	23	10	530	
00883	T10	60	164	23	10	530	
00884	T15	80	191	30	10	530	
00885	T20	80	191	30	10	530	
00886	T25	80	198	36	10	530	
00887	T27	100	218	36	10	630	
00888	T30	100	218	36	10	630	
00889	T40	150	274	41	5	650	



wiha
The work for you



3201 K6 6件一字/十字絕緣細頭起子組 **3,680**
 DU56-E 365 x 146 x 36mm

3201	Order-No.	⊖	⊕	⊖	⊕	
	35446	3.5	100	0.6	204	23
	35390	4.5	125	0.8	236	30
	35391	5.5	125	1.0	243	36
	35392	6.5	150	1.2	268	36

3211	Order-No.	⊕	⊖	⊖	⊕
	35393	PH1	80	191	30
	35394	PH2	100	218	36

320N K7 7件一字/十字絕緣細頭起子組 **2,980**
 DU56-E 365 x 146 x 36mm

320N	Order-No.	⊖	⊕	⊖	⊕	
	00820	2.5	75	0.4	179	23
	00823	4.0	100	0.8	211	30
	00826	5.5	125	1.0	243	36
	00829	6.5	150	1.2	268	36

321N	Order-No.	⊕	⊖	⊖	⊕
	00847	PH1	80	191	30
	00848	PH2	100	218	36

255-11	Order-No.	⊖	⊕	⊖	⊕	
	34745	3.0	60	0.5	140	19

320N K6 6件一字/十字絕緣細頭起子組 **2,880**
 DU56-E 365 x 146 x 36mm

320N	Order-No.	⊖	⊕	⊖	⊕	
	00821	3.0	100	0.5	204	23
	00823	4.0	100	0.8	211	30
	00826	5.5	125	1.0	243	36
	00829	6.5	150	1.2	268	36

321N	Order-No.	⊕	⊖	⊖	⊕
	00847	PH1	80	191	30
	00848	PH2	100	218	36



3201 K6 6件一字/十字絕緣細頭起子組 **3,400**
 SoftFinish® electric slimFix slotted/ Phillips screwdriver set, 6 pcs.

Order-No.	Series	⊖	⊕	⊖	⊕	
35389	3201 K6				1	3,400
⊖	3201	3.5x100	4.0x100	5.5x125	6.5x150	
⊕	3211	PH1x80	PH2x100			

3251 TR K6 6件星型中洞絕緣細頭起子組 **3,400**
 TORX® Tamper Resistant (with hole) 6-pcs.

Order-No.	Series	⊖	⊕	⊖	⊕	
41245					1	3,400
⊖		T10H x 100 / T15H x 100 / T20H x 100 / T25H x 125 / T30H x 125 / T40H x 150				



59813 4 SF 30孔起子架
 適用於所有雙色柄系列

Order-No.	mm	mm	mm	⊖	⊕	
59813	245	205	165		1	500



帶有驗電筆的組合

320N K7 7件一字/十字絕緣細頭起子組 **2,700**
 SoftFinish® electric slotted/ Phillips screwdriver set, 7 pcs.
 Individually tested protective insulation 1,000 V AC, VDE and GS tested.



Order-No.	Series	⊖	⊕	⊖	⊕	
00834	320N K7				1	2,700
⊖	320N	2.5x75	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			
⊖	255-11	3.0x0.5				

320N K6 6件一字/十字絕緣細頭起子組 **2,600**
 SoftFinish® electric slotted/ Phillips screwdriver set, 6 pcs.
 Individually tested protective insulation 1,000 V AC, VDE and GS tested.



Order-No.	Series	⊖	⊕	⊖	⊕	
00833	320N K6				1	2,600
⊖	320N	3.0x100	4.0x100	5.5x125	6.5x150	
⊕	321N	PH1x80	PH2x100			



NEW 2270P K6 6件精密絕緣一字/十字起子組 **2,000**
 PicoFinish electric slotted/Phillips screwdriver set, 6-pcs.
 Individually tested protective insulation 1,000 V AC, VDE and GS tested.



Order-No.	Series	⊖	⊕	⊖	⊕	
38996	2270P K6				1	2,000
⊖	2270P	1.5x40	2.0x60	2.5x60	3.0x60	
⊕	2271P	PH00x60	PH0x60			

Wiha Xeno型.



SoftFinish® Xeno型抗高壓絕緣割溝螺絲起子，適用於保險絲盒、接線板和繼電器的工作。



■ 絕緣塑料材質
■ 德國鉻鉬鋼



Wiha
新VDE絕緣
認證端子螺
絲起子。



327

十字割溝絕緣起子

SoftFinish® electric Xeno.

For terminal screws (slotted/ Phillips).

Individually tested protective

insulation 1,000 V AC, VDE and GS tested.

Order-No.	+	+	+	+	+	
30716	SL/PH1	80	191	30		500
30715	SL/PH2	100	218	36		620



328

米字割溝絕緣起子

SoftFinish® electric Xeno.

For terminal screws (slotted/ Pozidriv).

Individually tested protective

Order-No.	+	+	+	+	+	
30700	SL/PZ1	80	191	30		550
30701	SL/PZ2	100	218	36		680

無熔絲開關螺絲(割溝螺絲)，假如使用一般螺絲起子，磨耗快，容易產生斷裂。

Wiha驗電筆 Single-pole voltage tester.



255-11

螺絲起子驗電筆 110-250 volts

Single-pole SoftFinish® voltage tester,

110-250 volts.

Order-No.	①	⊖	+	+	+	
34745	3.0	0.5	60	140	19	480

SB 255-11

Order-No.	①	+	⊖	+	+	
35378	3.0	60	0.5	140	19	480



255-3

驗電筆220-250伏特

Single-pole voltage tester, 220-250 volts.

Order-No.	①	+	+	+	
05271	3.0	60	140	15	150



當使用VDE絕緣工具工作，需遵守國家的安全和事故預防條例。

Wiha 小知識

Wiha SoftFinish® 驗電筆

- 德國鉻鉬鋼，熱處理，完美使用
- 高品質螺絲起子結合 Wiha SoftFinish® 設計和驗電功能
- 全球110至250V的電壓測試功能
- 堅韌不生鏽的不鏽鋼彈簧夾
- 實體銅的接地觸點
- VDE和GS認證



Wiha 精密型 PicoFinish.



螺絲起子在製作過程中產品經過鍍鉻和熱處理。
精密的ChromTop® 螺絲起子頭確保螺絲牢牢就位。



可旋轉的轉帽用來保護手掌，避免工作傷害。



各種螺絲起子轉帽上，印有螺絲規格的標示，便於認別。

- TPR 橡膠
- PP 耐衝擊塑膠
- 德國鉻鉬鋼



260P

精密一字起子

PicoFinish slotted screwdriver.

Handle with rotating cap and rapid-turning zone.

Order-No.	①	—	⊖	●	—	+	—	—
00475	0.8	40	0,16	2,0	134	9	10	385
00476	1.0	40	0,18	2,0	134	9	10	345
00477	1.2	40	0,2	2,0	134	9	10	300
00478	1.5	40	0,25	2,0	134	9	10	270
00479	1.5	60	0,25	2,0	154	9	10	280
00480	1.8	40	0,3	2,0	134	9	10	270
00481	1.8	60	0,3	2,0	154	9	10	270
00482	2.0	40	0,4	2,0	140	18	10	225
00484	2.0	60	0,4	2,0	160	18	10	240
00485	2.0	100	0,4	2,0	200	18	10	270
00486	2.5	50	0,4	2,5	150	18	10	220
00487	2.5	75	0,4	2,5	175	18	10	225
00488	2.5	100	0,4	2,5	200	18	10	240
00490	3.0	50	0,5	3,0	150	18	10	210
00492	3.0	100	0,5	3,0	200	18	10	260
00493	3.0	150	0,5	3,0	250	18	10	270
00495	3.5	60	0,6	3,5	160	18	10	240
00497	4.0	60	0,8	4,0	160	18	10	250
00498	4.0	100	0,8	4,0	200	18	10	270
00499	4.0	150	0,8	4,0	250	18	10	280

261P

精密十字起子

PicoFinish Phillips screwdriver.

Handle with rotating cap and rapid-turning zone.

Order-No.	+	—	●	—	+	—	
00513	PH000	40	2,0	134	9	10	440
00512	PH00	40	2,0	134	9	10	300
00514	PH00	60	2,0	154	9	10	330
00511	PH0	50	3,0	150	18	10	235
00515	PH0	75	3,0	175	18	10	270
00516	PH1	60	4,0	160	18	10	275
00517	PH1	80	4,0	180	18	10	290
00518	PH1	150	4,0	250	18	10	340

262P

精密米字起子

PicoFinish Pozidriv screwdriver.

Handle with rotating cap and rapid-turning zone.

Order-No.	+	—	●	—	+	—	
04462	PZ1	60	4,0	160	18	10	320

265P

精密六角套筒起子

PicoFinish hex nut driver.

Handle with rotating cap and rapid-turning zone.

Order-No.	○	—	⊖	⊕	—	+	—	—
00544	1.5	60	2,5	3,0	160	18	10	570
00545	1.8	60	2,9	3,5	160	18	10	570
00546	2	60	3,2	4,0	160	18	10	520
00547	2.5	60	4,0	4,0	160	18	10	450
00548	3	60	5,0	5,0	160	18	10	450
00549	3.2	60	5,0	5,0	160	18	10	450
00550	3.5	60	5,3	6,0	160	18	10	480
00551	4	60	5,5	6,0	160	18	10	480
00552	4.5	60	6,2	7,0	160	18	10	500
00553	5	60	6,8	7,0	160	18	10	500
00554	5.5	60	7,6	8,0	160	18	10	500
00555	6	60	8,2	9,0	160	18	10	500
00556	7	60	9,6	10,0	160	18	10	550

265P Zoll

精密英制六角套筒起子

PicoFinish hex nut driver. Inch sizes.

Order-No.	—	—	+	mm	—	—	
00561	3/32	60	160	18	2,38	10	560
00561	3/32	60	160	18	2,38	10	600
00564	7/64	60	160	18	2,78	10	560
00559	1/8	60	160	18	3,18	10	560
00565	9/64	60	160	18	3,57	10	560
00562	5/32	60	160	18	3,97	10	600
00560	3/16	60	160	18	4,76	10	600
00563	7/32	60	160	18	5,56	10	600
00558	1/4	60	160	18	6,35	10	600

266PY

精密Y型起子

Order-No.	+	—	●	mm	+	—	
42470	0	40	2	134	9	10	700

Wiha 精密起子泡卡包裝加購請洽詢業務

- ① 包裝產品精美化
- ② 防塵、防撞、防盜、防潮、防鏽
- ③ 採透明彩色包裝，且增加產品的美觀與價值
- ④ 方便吊掛銷售展示
- ⑤ 需另收費用



Wiha 精密型 PicoFinish.



- **263P** 內六角起子
PicoFinish hex screwdriver.
Handle with rotating cap and rapid-turning zone.

Order-No.	●	↔	●	↔	+	↔	
00519	0.7	40	0.028	134	9		10 330
00520	0.9	40	0.035	134	9		10 320
00521	1.3	40	0.05	134	9		10 290
00522	1.5	50	-	144	9		10 270
00523	2.0	50	5/64	150	18		10 230
00524	2.5	60	-	160	18		10 230
00525	3.0	60	-	160	18		10 230

- **263P Zoll** 英制內六角起子
PicoFinish hex screwdriver. Inch sizes.

Order-No.	●	↔	↔	+	↔	
42427	1/16	50	144	9		10 260
42429	3/32	60	160	18		10 260
42430	7/64	60	160	18		10 260
42428	1/8	60	160	18		10 260



- **264P** 內六角球頭起子
PicoFinish ball end hex screwdriver.
Handle with rotating cap and rapid-turning zone.

Order-No.	●	↔	↔	●	+	↔	
00531	1.3	40	134	0.05	9		10 450
00532	1.5	50	150	-	18		10 400
00533	2.0	50	150	-	18		10 360
00534	2.5	60	160	-	18		10 330
00535	3.0	60	160	-	18		10 330

- **264P Zoll** 英制內六角球頭起子
PicoFinish ball end hex screwdriver. Inch sizes.

Order-No.	●	↔	↔	+	↔	
00537	1/16	50	150	18		10 420
00541	5/64	50	150	18		10 350
00539	3/32	50	150	18		10 350
00542	7/64	60	160	18		10 350
00538	1/8	60	160	18		10 350
00543	9/64	60	160	18		10 350
00540	5/32	60	160	18		10 350

- **266P** 精密五角起子
Pentalobe

Order-No.	●	↔	●	↔	+	↔	
39826	PL1	40	2.5	134	9		10 653
39829	PL4	40	2.5	134	9		10 653

Wiha 小知識



內六角防脫落起子
其卡簧的止動彈簧，由C型彈簧鋼製成，可將內六角螺絲，安全的固定在任何位置。
使用傾斜範圍大到25°以上，方便於狹窄地方。



- **267P** 星型起子
PicoFinish TORX® screwdriver.
Handle with rotating cap and rapid-turning zone.

Order-No.	●	↔	●	↔	+	↔	
25673	T1	40	2.5	134	9		10 500
25674	T2	40	2.5	134	9		10 500
20122	T3	40	2.5	134	9		10 500
20123	T4	40	2.5	134	9		10 500
00566	T5	40	2.5	134	9		10 440
00567	T6	40	2.5	140	18		10 350
00568	T7	40	2.5	140	18		10 350
00569	T8	40	2.5	140	18		10 350
00570	T9	50	3.0	150	18		10 350
00571	T10	50	3.0	150	18		10 350
00572	T15	60	3.5	160	18		10 370
00573	T20	60	4.0	160	18		10 370



- **267PR** 星型防脫落起子
PicoFinish TORX® MagicSpring® screwdriver.
Handle with rotating cap and rapid-turning zone.
Retaining springholds TORX® screws in place.

Order-No.	●	↔	●	↔	+	↔	
27729	T6	40	2.5	140	18		10 480
27730	T7	40	2.5	140	18		10 480
27731	T8	40	2.5	140	18		10 480
27732	T9	50	3.0	150	18		10 500
27733	T10	50	3.0	150	18		10 500
27734	T15	60	3.5	160	18		10 520



- **267PIPR** 五角星型中洞起子
PicoFinish TORX® PLUS security screwdriver (tamper-resistant).
Handle with rotating cap and rapid-turning zone.

Order-No.	●	↔	●	↔	+	↔	
38837	1IPR	40	2.5	134	9		10 653
38838	2IPR	40	2.5	134	9		10 653
38839	3IPR	40	2.5	134	9		10 653
38840	4IPR	40	2.5	134	9		10 653
38842	5IPR	40	2.5	134	9		10 653
38843	6IPR	40	2.5	140	18		10 458

- **26810P** 取晶片起子
PicoFinish chip lifter.

Order-No.	↔	↔	↔	+	↔	
00574	1	3.5	50	150	18	5 480

- **267PIP** 精密星型圓角起子
PicoFinish TORX PLUS® screwdriver.
Handle with rotating cap and rapid-turning zone.

Order-No.	●	↔	●	↔	+	↔	
29104	8IP	40	2.5	140	18		10 480



- **260P K6** 一字/十字起子六件組
PicoFinish slotted/ Phillips screwdriver set, 6 pcs.
Handle with rotating cap and rapid-turning zone.

Order-No.	Series						
00503	260P K6					1	1,540
⓪	260P	1.5x40	2.0x40	2.5x50	3.0x50		
⊕	261P	PH00x40	PH0x50				



- **260P K7** 一字/十字起子七件組
PicoFinish slotted/ Phillips screwdriver set, 7 pcs.
Handle with rotating cap and rapid-turning zone.

Order-No.	Series						
00504	260P K7					1	1,800
⓪	260P	1.5x40	2.0x40	2.5x50	3.0x50		
⊕	261P	PH00x40	PH0x50	PH1x60			



- **598141** PF 50孔起子架
適用於精密系列

Order-No.	mm	±mm	mm		
59814	215	90	115	1	500

Wiha 小知識



星型防脫落起子
其卡簧的止動彈簧，由不鏽鋼製成，可將星型螺絲，安全的固定在任何位置。
這項發明，讓每個使用者倍感方便。



- **265P K6** 六角套筒起子六件組
PicoFinish hex nut driver set, 6 pcs.
Handle with rotating cap and rapid-turning zone.

Order-No.	Series						
00557	265P K6					1	3,000
⓪	265P	2.5x60	3x60	3.5x60	4x60		
		5x60	5.5x60				

- **264P K6** 六角套筒起子六件組
PicoFinish ball end hex screwdriver set, 6 pcs.
Handle with rotating cap and rapid-turning zone.

Order-No.	Series						
00536	264P K6					1	1,600
⓪	263P	0.9x40					
	264P	1.3x40	1.5x50	2.0x50	2.5x60		
		3.0x60					

- **267P K6M01** 精密星型起子六件組
TORX®, 6 pcs. with holder

Order-No.	Series		
42997		1	2,400
⓪		T4 x 40 / T5 x 40 / T6 x 40 / T7 x 40 / T8 x 40 / T9 x 50	



- **270** 精密抗靜電一字陶瓷起子
Ceramic slotted screwdriver.
Non-static adjustment tool with ceramic blade.

Order-No.	⓪	⊕	⓪	⊕	⊕	⊕		
02163	0.9	15	0.35	1.75	94.5	12.5	10	1,100
02164	1.3	15	0.35	1.75	94.5	12.5	10	1,100
02167	1.8	15	0.35	1.75	94.5	12.5	10	1,100
02168	2.6	15	0.35	2.6	94.5	12.5	10	1,100

- **271** 精密抗靜電十字陶瓷起子
Ceramic Phillips screwdriver.
Non-static adjustment tool with ceramic blade.

Order-No.	⊕	⓪	⊕	⊕	⊕		
02169	PH0	15	2.6	94.5	12.5	10	1,100



- **270 HK3** 3件精密抗靜電陶瓷起子組
Ceramic slotted/ Phillips screwdriver set, 3 pcs.

Order-No.	Series				
02171	270 HK3			1	3,100
⓪	270	0.9x15	2.6x15		
⊕	271	PH0x15			

Wiha 抗靜電螺絲起子 Precision ESD.



可轉動的螺帽，使用工具進行調整時，更加便利快速。

- 抗靜電塑料材質
- 德國銘鉚鋼



德國 Wiha ESD 抗靜電螺絲起子手柄形狀完美，表面的電阻在 10^6 - 10^9 歐姆，確保靜電能安全地釋放。

EPA



272 抗靜電精密一字螺絲起子
Precision ESD slotted screwdriver.
Dissipative handle, ESD-safe.



Order-No.	①	↔	⊖	●	↔	↔	↔	
07634	1.5	40	0,25	2,0	120	12,5	10	330
07635	2.0	40	0,40	2,0	120	12,5	10	280
07636	2.5	50	0,40	2,5	145	13,0	10	280
07637	3.0	50	0,50	3,0	145	13,0	10	280
07638	3.5	60	0,60	3,5	170	14,0	10	280
07639	4.0	60	0,80	4,0	170	14,0	10	320

273 抗靜電精密十字螺絲起子
Precision ESD Phillips screwdriver.
Dissipative handle, ESD-safe.



Order-No.	⊕	↔	●	↔	↔	↔	
28053	PH000	40	2,0	120	12,5	10	470
07640	PH00	40	2,0	120	12,5	10	350
07641	PH0	50	3,0	145	13,0	10	290
07642	PH1	60	4,0	170	14,0	10	320

275 抗靜電精密六角螺絲起子
Precision ESD hex screwdriver.
Dissipative handle, ESD-safe.



Order-No.	●	↔	↔	↔	↔	
27708	0.9	40	120	12,5	10	320
07644	1.3	40	120	12,5	10	300
07645	1.5	50	145	13,0	10	300
07646	2	50	145	13,0	10	300
07647	2.5	60	170	14,0	10	300
07648	3	60	170	14,0	10	300
32315	4	60	170	14,0	10	300

278 抗靜電精密星型螺絲起子
Precision ESD TORX® screwdriver.
Dissipative handle, ESD-safe.



Order-No.	⊛	↔	●	↔	↔	↔	
25676	T1	40	2,5	120	12,5	10	580
25677	T2	40	2,5	120	12,5	10	580
21256	T3	40	2,5	120	12,5	10	540
21255	T4	40	2,5	120	12,5	10	540
07659	T5	40	2,5	120	12,5	10	520
07660	T6	40	2,5	120	12,5	10	400
07661	T7	40	2,5	120	12,5	10	400
07662	T8	40	2,5	120	12,5	10	400
07663	T9	50	3,0	145	13,0	10	400

安全公告：
Wiha抗靜電螺絲起子並不絕緣，
不適用於帶電作業。



276 抗靜電精密六角球頭螺絲起子
Precision ESD ball end hex screwdriver.
Dissipative handle, ESD-safe.



Order-No.	●	↔	↔	↔	↔	
07649	1.5	50	145	13,0	10	450
07650	2	50	145	13,0	10	400
07651	2.5	60	170	14,0	10	350
07652	3	60	170	14,0	10	350


277 抗靜電精密六角套筒起子
Precision ESD hex nut driver.
Dissipative handle, ESD-safe.

Order-No.	○	↔	↔	↔	↔	mm	↔	↔	
32314	4.5	60	6,2	7,0	155	13,0	10	580	
07656	4	60	5,5	6,0	155	13,0	10	580	
07657	5	60	6,8	7,0	155	13,0	10	580	
07658	5.5	60	7,6	8,0	170	14,0	10	580	

278IP 抗靜電精密星型圓角起子
Precision ESD TORX PLUS® screwdriver.
Dissipative handle, ESD-safe.



Order-No.	⊛	↔	●	↔	↔	↔	
27761	5IP	40	2,5	120	12,5	10	650

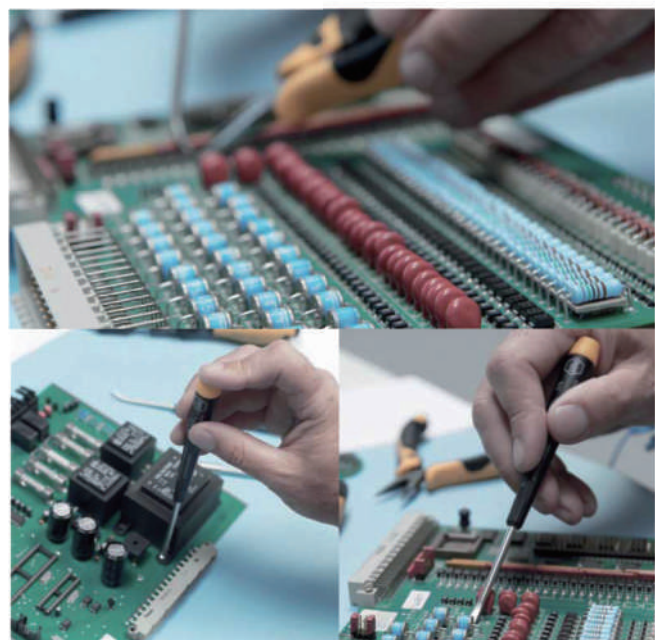



272 K6 抗靜電精密一字/十字螺絲起子六件組
Precision ESD slotted/Phillips screwdriver set, 6 pcs.
Dissipative handle, ESD-safe.


Order-No.	Series							
08463	272 K6						1	1,800
⓪	272	1.5x40	2.0x40	2.5x50	3.0x50			
⊕	273	PH00x40	PH0x50					



NEW 多功能設備箱鑰匙
SB 246 81 Electrical universal switch cabinet key in pen form.
Square, triangular drive, two-way key, 1/4" double bit.
145 mm long.

Order-No.	⓪	⊠	⊡	⓪	⊕	⊛	
39076	5 / 6 / 7-8	9	3-5	7.0	PH2	T20 / T25	5 2,600

INFOBOX: Electrostatic conductive ESD tools



Sensitive, electronic components can be damaged even at a very low voltage.

- Dissipative tools by Wiha discharge the electrostatic energy in a controlled, safe manner.
- ESD tools meet the ESD Standard IEC 61340-5-1.
- ESD tool handles have a surface resistance of 10^6 - 10^9 Ohm.



302ESD 抗靜電一字起子
SoftFinish® ESD slotted screwdriver.
Dissipative handle, ESD-safe.



Order-No.	⓪	⊠	⊡	⓪	⊕	⊛	
08179	2.5	75	0.4	2.5	179	23	10 320
27150	3.0	100	0.5	3.0	204	23	10 320
27151	4.0	100	0.8	4.0	211	30	10 420
08182	5.5	125	1.0	5.5	236	30	10 620



311ESD 抗靜電十字起子
SoftFinish® ESD Phillips screwdriver.
Dissipative handle, ESD-safe.

Order-No.	⊕	⊠	⊡	⓪	⊕	⊛	
08184	PH0	60	3.0	164	23		10 410
08186	PH2	100	6.0	218	36		10 583



313ESD 抗靜電米字起子
SoftFinish® ESD Phillips screwdriver.

Order-No.	⊕	⊠	⊡	⓪	⊕	⊛	
26928	PZ0	60	3.0	164	23		10 480
26929	PZ1	80	4.5	191	30		10 480



362ESD 抗靜電星型起子
SoftFinish® ESD TORX® screwdriver.
Dissipative handle, ESD-safe.

Order-No.	⊛	⊠	⊡	⓪	⊕	⊛	
31432	T3	60	2.5	164	23		10 600
27148	T4	60	2.5	164	23		10 600
27641	T5	60	3.5	164	23		10 460
27149	T6	60	3.5	164	23		10 460
31901	T7	60	3.5	164	23		10 460
22436	T8	60	3.5	164	23		10 460
27145	T9	60	4.0	171	30		10 480
27144	T10	80	4.0	191	30		10 480
27147	T20	100	4.0	218	36		10 500



with scale



2882 抗靜電可調扭力起子
TorqueVario®-S ESD torque screwdriver.
Torque value can be set via window scale.
Automatic release.

Order-No.	Nm	⊛	⊠	⊡	⓪	⊕	⊛
36851	0.04-0.46*	10%	4	127	23		1 7,200
26865	0.1-0.6	10%	4	127	23		1 7,800
26629	0.4-1.0	6%	4	127	23		1 7,800
26866	0.8-2.0	6%	4	131	30		1 8,500

* Precision in range of 0.1-0.46 Nm



Telescopic

7000 EB16 ESD 16件四號抗靜電多用途工具組
SYSTEM 4 ESD bit set, 16 pcs.
Mixed sets.

Order-No.	Series				
33503	7000 EB16 ESD	1 3,400			
	2691ESD	1xSYSTEM 4 SoftFinish®-telescopic ESD handle			
	U759 00	1xSYSTEM 4 bit holder			
	⓪ U750	1x2.0	1x3.0		
	⊕ U751	1xPH000	1xPH00	1xPH0	1xPH1
	⊗ U757	1xT3	1xT4	1xT5	1xT6
		1xT8			
	● U753	1x0.9	1x1.3	1x1.5	



with scale

2882 S10 13件抗靜電可調扭力起子組
TorqueVario®-S ESD torque screwdriver set, 13 pcs.
Torque value can be set via window scale.
With universal bit holder and 10 straight-blade/Phillips/Poszdriv/
TORX® Standard bits.

Order-No.	Series				
27687	2882 S10	1 10,800			
	2882	TorqueVario®-S ESD, model 0.8-2.0 Nm			
	2889	Torque ESD bit universal holder			
	288-900	Torque-Setter ESD			
	⓪ 7010 Z	4.5x25	5.5x25		
	⊕ 7011 Z	PH0x25	PH1x25		
	⊗ 7012 Z	PZ0x25	PZ1x25		
	● 7015 Z	T7x25	T8x25	T9x25	T10x25



2270P K6 6件精密絕緣一字/十字起子組
Slotted, Phillips 6-pcs.

Order-No.		
38996	1	2,000
⓪	1,5 x 40 / 2,0 x 40 / 2,5 x 60 / 3,0 x 60	
⊕	PH00 x 40 / PH0 x 60	



SB 2831 0101 4件迷你絕緣slim多用途工具組
Stubby, 4-pcs.

Order-No.		
41230	1	1,800
⓪	Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits	
⓪	3,5 x 75	
⊕	PH2 x 75	
⊗	SL/PZ2 x 75	



2831 T18 18件替換絕緣工具組
assorted 18-pcs. in bag

Order-No.		
41231	1	5,500
⓪	1 x Screwdriver with bit holder SoftFinish® electric slimVario Stubby for slimBits	
⓪	1 x Screwdriver with bit holder SoftFinish® electric slimVario for slimBits, Tool tested at 10,000 V AC	
⓪	1 x 2,5 / 1 x 3,5 / 1 x 5,5	
⊕	1 x PH1 / 1 x PH2	
⊗	1 x PZ1 / 1 x PZ2	
⊗	1 x SL/PZ1 / 1 x SL/PZ2	
⊗	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20	
●	1 x 3 / 1 x 4 / 1 x 5	

Wiha 數位扭力起子 iTorque.



■ 多種複合材質 (塑料金屬化手柄)

■ 德國鉻鉬鋼 (替換式起子)

iTorque

機電式 · 高度精確和方便地使用

扭力工具的新標準。

技術達到最小的細節。

iTorque 卓越的設計，從A到Z的操作，簡單到不能再簡單的設計，並大大提高效率。

所需的顯示屏上的快速設置值，與設定輪的柄端定位，完全不需要使用到任何工具。

清晰可見的數字顯示，和非常簡單的單一設置選項，測量上沒有多餘的讀數誤差。

特別實用：

按一下(2秒)單位切換(Nm/in.lb)

塑料金屬化手柄：

具有人體工學設計

高品質的耐用材料和軟橡膠(TPR)的優良設計。

設計適合最佳的扭力範圍使用的手柄大小。

非常現代，高效率的測試設備監測，定且使用次數全部記錄。

iTorque建立了新的品質保證標準。

它結合了計數器記錄，並顯示使用的實際次數與提醒功能，及時提醒用戶預先提早校正起子。



Wiha iTorque.

- 機電一體成型技術。
- 數位顯示。
- 單擊式控制。
- 校準測試設備監控警報。
- 使用壽命長 - 可以校正。
- 精度 $\pm 6\%$ 。
- 可客制化。



不需要任何工具就可以進行設定扭力值。



大型數字顯示數字
顯示防止讀取錯誤
單位可切換
(Nm in.lb | Ncm in.oz)
精度 ±6%。



單擊 " 開始 " 單擊 " 控制計數功能 " 記錄使用次數功能。



達 5,000 次後會有警示設備的監控提醒。



客製化服務
(例如: 測試設備數量, 工作場所指定, 公司logo雷射)



WIHA提供校正服務。



NEW
2835

iTorque 數位扭力起子

iTorque mechatronic torque screwdriver.
由Wiha設定的固定扭力值

手柄:

旋鈕式快速設定扭力

符合人體工學的多種複合材質手柄, 更加輕便
手柄尺寸與其範圍內的扭力裝置成比例

標誌:

調整扭力值時, 到設定值會喀一聲

精準度:

EN ISO 6798 · BS EN 26789 · ASME B107.14M

接桿:

±6% 依照德國國家標準 (型號0.1-0.6Nm=±10%)

附加:

適用於C6.3&E6.3(1/4 ")起子頭 (內含接桿)

電子記錄使用次數

使用次數達5000次校正提醒功能(可清除使用次數)

電子螢幕清楚顯示設定扭力

快速切換- Nm ↔ in.lbs / Ncm ↔ in.oz.

經久耐用, 德國Wiha 提供校正服務

相關資訊請參閱 <http://mytorque.wiha.com>

Order-No.	Nm	in.oz	±%	⊙	⊕	⊖	⊗	⊘
36886	40-150 Ncm	60-210 in.oz	6%	4	134	34	1	15,000
36887	0.8-3.0	7-26 in.lbs	6%	4	134	34	1	15,000
36888	1.0-6.0	9-50 in.lbs	6%	4	134	40	1	15,000





**SB 246 70** 多功能LED手電筒

in blister pack, including 3 AAA batteries

Order-No.	LED		UV			
41286	100 / 310 lm	Class 2	300 - 400 mW	3 x AAA batteries	x	5 4,600

INFOBOX:
 Flashlight with LED,
 laser and UV light


- Universal work tool with integrated laser, UV light and LED light.
- Optimum positioning and variable light direction thanks to the magnetic base and swivel head.
- The installation position can be projected directly from the middle of a table when fitting lights to the ceiling.
- The integrated UV light is ideal for finding misplaced coloured fluorescent Wiha tools and for technical inspections.



SoftFinish® electric



slimFix

- Actuating tool for spring clips (wedge-profiled output geometry)
- Effortless access to low-lying fastening and spring elements



VDE exchange bit system



slimVario



Compact VDE bit sets:
holder + slimBit (length 75 mm)

- 35% lighter than comparable sets
- Maximum service life:
metal locking mechanism
- Precise work – additional guidance
with free-running sleeve



- PH1 | PH2
- PZ1 | PZ2
- SL/PH1 | SL/PH2
- SL/PZ1 | SL/PZ2
- T8 | T10 | T15 | T20 | T25
- 1,5 | 2 | 2,5 | 3 | 4 | 5 | 6
- Robertson 1 | 2

VDE torque system




slimTorque

Controlled tightening of electrical screw connections with slimBits





- ⌀ 3,5 | 4,0 | 4,5 | 5,5 | 6,5
- ⊕ PH1 | PH2 ⊕ SL/PH1 | SL/PH2
- ⊗ PZ1 | PZ2 ⊖ Robertson 1 | 2

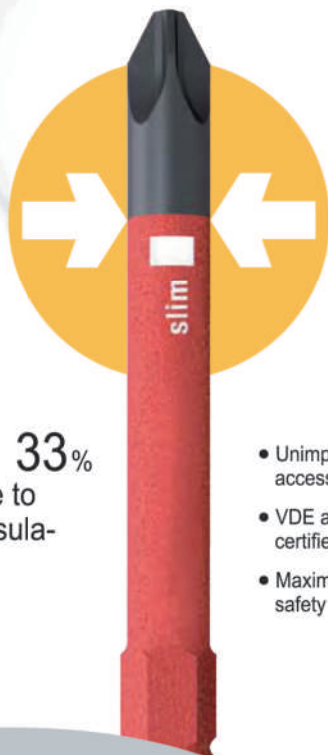

Blades up to **33%** narrower due to integrated insulation.

- Unimpeded accessibility
- VDE and GS certified
- Maximum safety

Plastic box



Bag




slim Selection Set



slimVario + slimTorque



Wiha 替換式彈夾起子 Magazine bit holder.



- 獨特的收納方式。
- 省時·省力·高效率。
- 磁性。
- 人體工學手柄。
- 簡潔和輕巧。
- 任何地方都可使用。
- 6合1。
- 人體工學。
- 專業品質·德國製造。
- 狹窄空間的最佳選
- 8合1
- 可調整長度 50-85mm.
- ClickStop 球形凹槽卡點
- ClicFix 磁性快脫接頭
- 磁性快脫接桿可以接在電動工具上使用。



- TPR 橡膠
- PP 耐衝擊塑膠
- 德國鉻鈹鋼



38090103 8件替換式彈夾起子·磁性, 1/4"
Magazine bit holder, magnetic, 1/4".

Order-No.	Series						
32903	38090103					5	1,222
①	7010 Z	1x5.5	1x6.5				
⊕	7011 Z	1xPH1	3xPH2	2xPH3			



38090102 8件替換式彈夾起子·磁性, 1/4"
Magazine bit holder, magnetic, 1/4".

Order-No.	Series						
32902	38090102					5	1,458
⊗	7015 Z	1xT6	1xT8	1xT10	1xT15		
		1xT20	1xT25	1xT30	1xT40		



38090101 8件替換式彈夾起子·磁性, 1/4"
Magazine bit holder, magnetic, 1/4".

Order-No.	Series					
32901	38090101				5	1,222
①	7010 Z	1x6.5				
⊕	7011 Z	1xPH1	1xPH2	1xPH3		
⊗	7012 Z	1xPZ2				
⊗	7015 Z	1xT15	1xT20	1xT25		




380101 6件替換式彈夾起子·磁性, 1/4"
Magazine bit holder Stubby, magnetic, 1/4".

Order-No.	Series					
33736	380101				10	625
①	7010 Z	1x4.5	1x6.5	1x8.0		
⊕	7011 Z	1xPH1	1xPH2	1xPH3		



380103 6件替換式彈夾起子·磁性, 1/4"
Magazine bit holder Stubby, magnetic, 1/4".

Order-No.	Series					
33743	380103				10	625
⊗	7015 Z	1xT10	1xT15	1xT20		
		1xT25	1xT30	1xT40		



SB 2831 09 020 6件彈夾替換式絕緣起子·1/4"
Magazine Bit Holder LiftUp electric with 6 slimBits.

Order-No.	Series						
38612	SB 2831 09 020					5	3,000
①	2831-10	1x2.5	1x3.0	1x4.0	1x5.5		
⊕	2831-11	1xPH1	1xPH2				



SB 3803 01-024 6件替換式星型彈夾起子
Magazine bit holder LiftUp 70, magnetic 1/4".
Blister packed for hanging.

Order-No.	Series						
38598	SB 3803 01-024					5	2,800

3803 01-020 6件替換式一字/十字彈夾起子
Magazine bit holder LiftUp 70, magnetic 1/4".


Order-No.	Series					
38588	3803 01-020				5	2,500
①	7040 Z	1x4.0	1x5.5	1x6.5		
⊕	7041 Z	1xPH1	1xPH2	1xPH3		

Wiha 替換系列(一般) SYSTEM 6.



德國Wiha SYSTEM 6
是個便利的全能工具，
適用於各種用途。

- TPR 橡膠
- PP 耐衝擊塑膠
- 抗靜電塑料材質
- 德國鉻鉬鋼



新型的SoftFinish®
可調式手柄，內裝有滾
珠卡緊的設計，使工具
牢牢固定，更換起子桿
十分迅速。



284 可調式手柄
SYSTEM 6 SoftFinish®-telescopic handle.

Order-No.	Ø	mm	mm	mm	mm
30372	6.0	115	36	5	667



284ESD 六號可調式抗靜電起子手柄
SYSTEM 6 SoftFinish®-telescopic ESD handle.
Dissipative handle, ESD-safe.

Order-No.	Ø	mm	mm	mm	mm
31496	6.0	120	36	5	900



SB 282 122 12件六號棘輪起子手柄組
SYSTEM 6 Topra set, 12 pcs.
With 1/4" bit holder and 10 bits.

Order-No.	Series	mm	mm	mm	mm	mm	mm
05672	8	SB 282 122					1 3,000
	282	SYSTEM 6 Topra ratchet					
	7802	SYSTEM 6 bit holder					
	7010	Z	4.5x25	5.5x25	6.5x25	8.0x25	
	7011	Z	PH1x25	PH2x25	PH3x25		
	7015	Z	T10x25	T15x25	T20x25		



按手柄卡榫：
=> 固定鎖鬆開



按下並調整：
=> 設置所需的起
子頭長度



鬆開卡榫：
=> 起子頭固定

※ 請特別注意，須按下卡榫才可以進行
插入起子頭或拔出起子頭的動作，以免
造成工具結構破壞。



281 B11 替換起子11件組
SYSTEM 6 reversible blades set, 11 pcs.

Order-No.	Series	mm	mm	mm	mm	mm	
00623	281 B11					1 4,444	
	284	SYSTEM 6 SoftFinish®-telescopic handle					
①	①	284	4.0 - 6.0	5.5 - 6.5			
⊕	⊕	284	PH1 - PH2				
⊕	⊕	284	PZ1 - PZ2				
⊗	⊗	284	T10 - T15	T20 - T25	T30 - T40		
●	●	284	4 - 45	- 56	- 6		

可調整螺絲起子長度



282 B11-1 棘輪手柄替換起子11件組
SYSTEM 6 reversible blades set, 11 pcs.

Order-No.	Series	mm	mm	mm	mm	mm	
03773	282 B11-1					1 5,000	
	282	SYSTEM 6 Topra ratchet					
①	①	284	4.0 - 6.0	5.5 - 6.5			
⊕	⊕	284	PH1 - PH2				
⊕	⊕	284	PZ1 - PZ2				
⊗	⊗	284	T10 - T15	T20 - T25	T30 - T40		
●	●	284	4 - 45	- 56	- 6		



284 替換一字起子
SYSTEM 6 slotted reversible blade.

Order-No.	①	①	⊖	⊖	↔	●	➤
27627	3.5	4.5	0.6	0.8	150	6.0	5 380
00629	4.0	6.0	0.8	1.0	150	6.0	5 380
00630	5.5	6.5	1.0	1.2	150	6.0	5 380
• 36084	8.0	-	1.2	-	150	6.0 NEW	5 380



284 替換一字/十字起子
SYSTEM 6 combined slotted-Phillips reversible blade.

Order-No.	①	⊕	⊖	↔	●	➤
00665	4.0	PH1	0.8	150	6.0	5 380
00666	6.0	PH2	1.0	150	6.0	5 380
00667	6.5	PH3	1.2	150	6.0	5 380



284 替換十字起子
SYSTEM 6 Phillips reversible blade.

Order-No.	⊕	⊕	↔	●	➤
00631	PH1	PH2	150	6.0	5 380
27628	PH2	PH3	150	6.0	5 380



284 替換米字起子
SYSTEM 6 Pozidriv reversible blade.

Order-No.	⊕	⊕	↔	●	➤
00632	PZ1	PZ2	150	6.0	5 380
27629	PZ2	PZ3	150	6.0	5 380



284 替換內六角球頭起子
SYSTEM 6 combined ball end hex - hex reversible blade.

Order-No.	●	●	↔	●	➤
00635	2.5	2.5	150	6.0	5 380
00636	3	3	150	6.0	5 380
00637	4	4	150	6.0	5 380
00638	5	5	150	6.0	5 380
00639	6	6	150	6.0	5 380



U109 00 多功能起子頭接頭
SYSTEM 6 extension blade.

Order-No.	○	↔	●	➤
• 08921	6.0	166	6.0	11 5 650



284 替換星型起子
SYSTEM 6 TORX® reversible blade.

Order-No.	●	●	↔	●	➤
00654	T6	T8	150	6.0	5 380
00655	T7	T9	150	6.0	5 380
00656	T10	T15	150	6.0	5 380
00657	T20	T25	150	6.0	5 380
00658	T30	T40	150	6.0	5 380



284 替換星型中洞起子
SYSTEM 6 TORX® Tamper Resistant reversible blade.

Order-No.	⊗	⊗	↔	●	➤
27630	T6H	T8H	150	6.0	5 450
27631	T7H	T9H	150	6.0	5 450
27632	T10H	T15H	150	6.0	5 450
27633	T20H	T25H	150	6.0	5 450
27634	T30H	T40H	150	6.0	5 450

• 星型中洞也適用於星型螺絲，但不可顛倒使用。



284 替換Y型(人型)起子
SYSTEM 6 Tri-Wing® reversible blade.

Order-No.	⊗	⊗	↔	●	➤
27637	TW0	TW1	150	6.0	5 450
27638	TW2	TW3	150	6.0	5 450
27639	TW4	TW5	150	6.0	5 450



284 替換萬字起子
SYSTEM 6 Torq-Set® reversible blade.

Order-No.	⊕	⊕	↔	●	➤
27635	TS2	TS4	150	6.0	5 450
27636	TS6	TS8	150	6.0	5 450



7802 兩分起子接頭
SYSTEM 6 bit holder.

Order-No.	○	↔	●	➤
03882	1/4	164	6.0	10 5 700



7803 兩分套筒接頭
SYSTEM 6 adapter blade.

Order-No.	○	↔	●	➤
03883	1/4	164	6.0	5 650

Wiha 替換系列(一般) SYSTEM 6.



281 T6 替換起子6件組
SYSTEM 6 reversible blades set, 6 pcs.

Order-No.	Series		
27715	281 T6	1	2,400
	284	SYSTEM 6 SoftFinish®-telescopic handle	
① ①	284	3.5 - 4.5	4.0 - 6.0 5.5 - 6.5
⊕ ⊕	284	PH1 - PH2	
● ●	284	5 - 5	



284ESD T6 01 替換起子6件組
SYSTEM 6 ESD set of reversible blades, 6 pcs.

Order-No.	Series		
31497	284ESD T6 01	1	2,800
	284ESD	SYSTEM 6 SoftFinish®-telescopic ESD handle	
① ①	284	3.5 - 4.5	4.0 - 6.0 5.5 - 6.5
⊕ ⊕	284	PH1 - PH2	
● ●	284	5 - 5	

281 T6 01 替換起子6件組
SYSTEM 6 reversible blades set, 6 pcs.

Order-No.	Series		
32298	281 T6 01	1	2,500
	284	SYSTEM 6 SoftFinish®-telescopic handle	
① ①	284	4.0 - 6.0	
⊕ ⊕	284	PH1 - PH2	
⊗ ⊗	284	PZ1 - PZ2	
⊛ ⊛	284	T10 - T15	T20 - T25



281 T11 替換起子11件組
SYSTEM 6 reversible blades set, 11 pcs.

Order-No.	Series		
03591	281 T11	1	4,500
	284	SYSTEM 6 SoftFinish®-telescopic handle	
① ①	284	4.0 - 6.0	5.5 - 6.5
⊕ ⊕	284	PH1 - PH2	
⊗ ⊗	284	PZ1 - PZ2	
⊛ ⊛	284	T10 - T15	T20 - T25 T30 - T40
● ●	284	4 - 4	5 - 5 6 - 6

U106 T8 8件六號套筒起子手柄組
Hexa gon nut dri ver8-pcs .

Order- Nb.		
27712	1	3,800
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade	
○	5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 10,0 - 150 / 13,0 - 150	

U106 T12 12件六號套筒起子手柄組
Hexa gon nut dri ver12-pcs .


Order-No.		
27713	1	5,400
○	Screwdriver handle SoftFinish®-telescopic for SYSTEM 6 interchangeable blade	
○	4,0 - 150 / 4,5 - 150 / 5,0 - 150 / 5,5 - 150 / 6,0 - 150 / 7,0 - 150 / 8,0 - 150 / 9,0 - 150 / 10,0 - 150 / 11,0 - 150 / 13,0 - 150	

Wiha 替換系列(精密) SYSTEM4.



德國Wiha ChromTop®
精密鍍鉻起子頭·可準
確貼合使用。

- TPR 橡膠
- PP 耐衝擊塑膠
- 抗靜電塑料材質
- 德國鉻鉍鋼

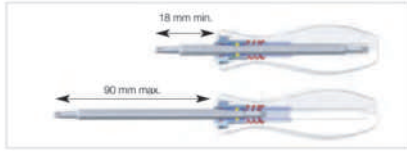

SoftFinish® 可調式手柄·
插入的替換起子桿長度在18-90mm之間。



2691 可調式手柄
SYSTEM 4 SoftFinish®-telescopic handle.

Order-No.	⊙	⊕	⊖	⊗	⊘	⊙
30373	4.0	105	23		10	625



2691ESD 四號抗靜電可調式起子手柄
SYSTEM 4 SoftFinish®-telescopic ESD handle.
Dissipative handle, ESD-safe.

Order-No.	⊙	⊕	⊖	⊗	⊘	⊙
31498	4.0	105	23		10	750



269 一字替換起子
SYSTEM 4 slotted reversible blade.

Order-No.	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
00576	1.5	3.0	0.25	0.5	120	4.0			5	430
00577	2.0	3.5	0.4	0.6	120	4.0			5	430
00578	2.5	4.0	0.4	0.8	120	4.0			5	430



269 一字/十字替換起子
SYSTEM 4 slotted Phillips reversible blade.

Order-No.	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
00601	2.0	PH00	0.4	120	4.0				5	430
00602	3.0	PH0	0.5	120	4.0				5	430
00603	4.0	PH1	0.8	120	4.0				5	430



269 十字替換起子
SYSTEM 4 Phillips reversible blade.

Order-No.	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
00579	PH000	PH00	120	4.0					5	430
00580	PH0	PH1	120	4.0					5	430



269 替換米字起子
SYSTEM 4 Pozidriv reversible blade.

Order-No.	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
03186	PZ0	PZ1	120	4.0					5	430



269 替換星型起子
SYSTEM 4 TORX® reversible blade.

Order-No.	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
26122	T1	T2	120	4.0					5	430
26123	T3	T4	120	4.0					5	430
26124	T5	T6	120	4.0					5	430
00597	T6	T8	120	4.0					5	430
00598	T7	T9	120	4.0					5	430
26125	T8	T10	120	4.0					5	430
00599	T10	T15	120	4.0					5	430
00600	T15	T20	120	4.0					5	430





269 替換六角套筒起子
SYSTEM 4 nut driver.

Order-No.	⊙	⊕	⊖	⊗	⊘	⊙	⊕	⊖	⊗	⊘	⊙
00588	1.5	1.8	125	4.0					5	430	
00589	2	2.5	125	4.0					5	430	
00590	3	-	125	4.0					5	430	
00591	3.2	-	125	4.0					5	430	
00592	3.5	-	125	4.0					5	430	
00593	4	-	125	4.0					5	430	
00594	4.5	-	125	4.0					5	430	
00595	5	-	125	4.0					5	430	
00596	5.5	-	125	4.0					5	430	



269 替換內六角球頭起子
SYSTEM 4 combined ball end hex - hex reversible blade.

Order-No.	●	●	←	●	←	
00582	1.3	1.3	120	4.0	5	430
00583	1.5	1.5	120	4.0	5	430
00584	2	2	120	4.0	5	430
00585	2.5	2.5	120	4.0	5	430
00586	3	3	120	4.0	5	430
00587	4	4	120	4.0	5	430

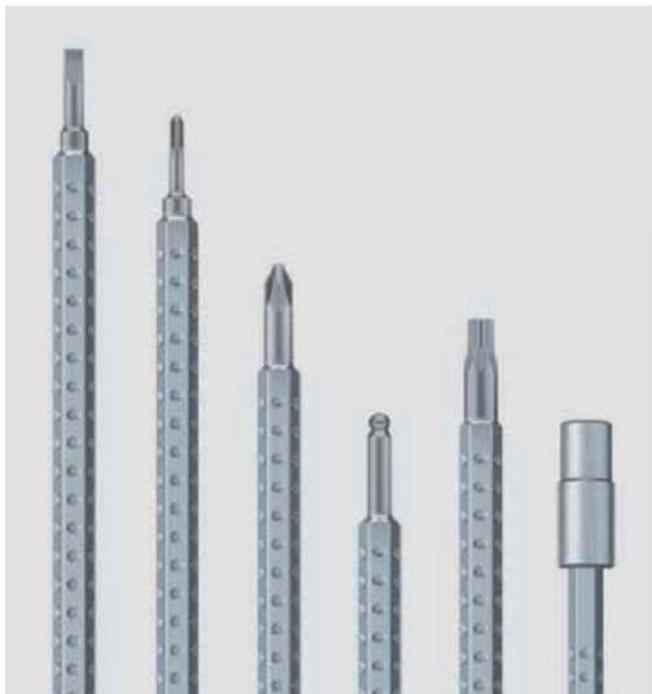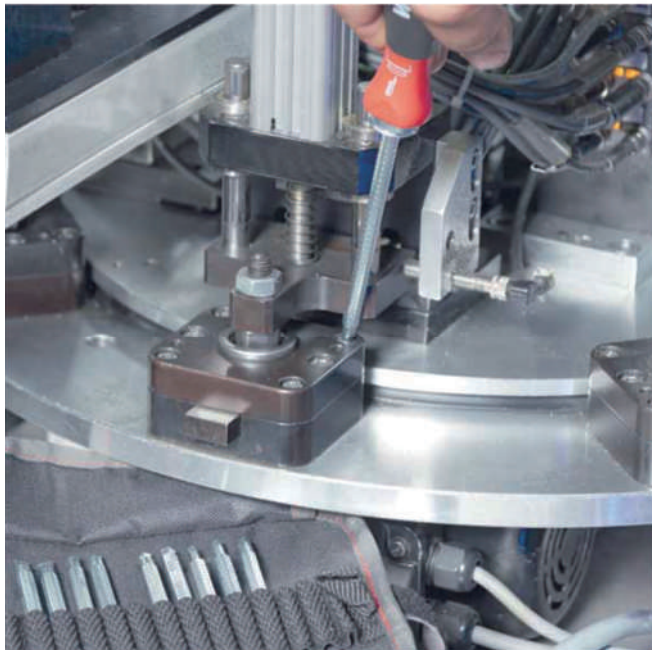

可調整螺絲起子長度

269 T4 替換起子4件組
SYSTEM 4 reversible blades set, 4 pcs.

Order-No.	Series	←	
00613	269 T4	10	2,000
	2691	SYSTEM 4 SoftFinish® telescopic handle	
① ⊕	269	2.0 - PH00	3.0 - PH0 4.0 - PH1



可調整螺絲起子長度

269 T6 替換起子6件組
SYSTEM 4 reversible blades set, 6 pcs.

Order-No.	Series	←	
00616	269 T6	5	2,800
	2691	SYSTEM 4 SoftFinish® telescopic handle	
① ①	269	1.5 - 3.0	2.0 - 3.5 2.5 - 4.0
⊕ ⊕	269	PH000 - PH00	PH0 - PH1



可調整螺絲起子長度

269 T11 替換起子11件組
SYSTEM 4 reversible blades set, 11 pcs.

Order-No.	Series	←	
00610	269 T11	5	5,000
	2691	SYSTEM 4 SoftFinish® telescopic handle	
① ①	269	1.5 - 3.0	2.0 - 3.5 2.5 - 4.0
⊕ ⊕	269	PH000 - PH00	PH0 - PH1
● ●	269	1.3 - 1.3	1.5 - 1.5 2 - 2
		2.5 - 2.5	3 - 3



可調整螺絲起子長度

269 T6 01 替換起子6件組
SYSTEM 4 reversible blades set, 6 pcs.

Order-No.	Series	←	
26121	269 T6 01	5	3,000
	2691	SYSTEM 4 SoftFinish® telescopic handle	
⊕ ⊕	269	PH000 - PH00	PH0 - PH1
⊛ ⊛	269	T3 - T4	T5 - T6 T8 - T10




可調整螺絲起子長度

269 T11 01 替換起子11件組
SYSTEM 4 reversible blades set, 11 pcs.

Order-No.	Series	←	
27820	269 T11 01	5	5,000
	2691	SYSTEM 4 SoftFinish® telescopic handle	
① ①	269	1.5 - 3.0	2.0 - 3.5 2.5 - 4.0
⊕ ⊕	269	PH000 - PH00	PH0 - PH1
⊛ ⊛	269	T6 - T8	T7 - T9
● ●	269	1.5 - 1.5	2 - 2 2.5 - 2.5

Wiha 絕緣細頭替換型SoftFinish® electric slimVario.



前端起子桿直徑減少33%·毫不費力的通過深孔的緊固件和彈簧元件。



這是一種常用的替換式螺絲起子搭配舒適的SoftFinish®手柄·對於市面上不願在安全性和舒適性方面妥協的品牌·德國 Wiha 絕對是最好的選擇。

- 絕緣塑料材質
- 德國鉻鉬鋼



螺絲起子狹窄33%

- 暢通無障礙
- 擁有VDE和GS認證
- 最大的安全性



2831-00 絕緣起子接頭結合手柄 SoftFinish® electric slimVario bit holder with handle and ClicFix, 6.0 mm.

Order-No.	6	30	50	160	13	5	1,200
34577							



2831-10 一字絕緣細頭替換起子頭 SoftFinish® electric slimBit, slotted.

Order-No.	2.5	3.0	3.5	4.0	4.5	5.5	6.5	75	0.4	0.5	0.6	0.8	1.0	1.2	6.0	no slim version	1	300
34578																		
34579																		
41159																		
34580																		
34581																		
34582																		

2831-11 十字絕緣細頭替換起子頭 SoftFinish® electric slimBit, Phillips.

Order-No.	PH1	PH2	75	6.0	1	340
34583						
34584						

2831-12 米字絕緣細頭替換起子頭 SoftFinish® electric slimBit, Pozidriv.

Order-No.	PZ1	PZ2	75	6.0	1	340
34585						
34586						

2831-13 十字割勾絕緣細頭替換起子頭 SoftFinish® electric slimBit, Xeno, for terminal screws (slotted/ Phillips).

Order-No.	SL/PH1	SL/PH2	75	6.0	1	400
34587						
34588						

2831-14 米字割勾絕緣細頭替換起子頭 SoftFinish® electric slimBit for terminal screws (slotted/Pozidriv).

Order-No.	SL/PZ1	SL/PZ2	75	6.0	1	400
34589						
34590						

2831-15 星型絕緣細頭替換起子頭 SoftFinish® electric slimBit, TORX®

Order-No.	T8	T10	T15	T20	T25	75	6.0	1	400
35506									
35507									
35508									
35509									
36071									

2831-18 六角絕緣細頭替換起子頭 SoftFinish® electric slimBit, hexagon.

Order-No.	1.5	2	2.5	3	4	5	6	75	6.0	0.9	1.8	3.8	5.5	5.5	5.5	no slim version	1	400
37222																		
37223																		
37224																		
37147																		
37225																		
37226																		
37227																		



18件絕緣slim替換工具組
assorted 18-pcs. in bag

2831 T18

Order-No.		
41231	1	5,500
○	1 x Screwdriver with bit holder SoftFinish®electric slimVario Stubby for slimBits	
○	1 x Screwdriver with bit holder SoftFinish®electric slimVario for slimBits, Tool tested at 10,000 V AC	
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5	
⊕	1 x PH1 / 1 x PH2	
⊕	1 x PZ1 / 1 x PZ2	
⊕	1 x SL/PZ1 / 1 x SL/PZ2	
⊕	1 x T9 / 1 x T10 / 1 x T15 / 1 x T20	
⊕	1 x 3 / 1 x 4 / 1 x 5	

Manufactured acc. to IEC 60900.



9件絕緣slim多用途工具組

Slotted, Phillips, Pozidriv, 9-pcs. in bag

2831 T9 01

Order-No.		
41232	1	3,800
○	1 x Screwdriver with bit holder SoftFinish®electric slimVario Stubby for slimBits	
○	1 x Screwdriver with bit holder SoftFinish®electric slimVario for slimBits	
⊖	1 x 2,5 / 1 x 3,5 / 1 x 5,5	
⊕	1 x PH1 / 1 x PH2	
⊕	1 x PZ1 / 1 x PZ2	



INFOBOX: slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

4件迷你絕緣slim多用途工具組

Stubby, 4-pcs.

SB 2831 0101

Order-No.		
41230	1	1,800
○	Screwdriver with bit holder SoftFinish®electric slimVario Stubby for slimBits	
⊖	3,5 x 75	
⊕	PH2 x 75	
⊕	SL/PZ2 x 75	

Manufactured acc. to IEC 60900.

Wiha 扭力型 Torque screwdrivers.



調整扭力值時，到設定值會喀一聲。



符合人體工學的多種複合材質手柄，更加輕便。



帶刻度



2852 可調式扭力起子 TorqueVario®-S Torque screwdriver.

Order-No.	Nm	±%	○	⊕	⊖	NEW	1	5,800
36849	0.04-0.46	±10%	4	127	23	NEW	1	5,800
26888	0.1-0.6	10%	4	127	23		1	5,800
36850	0.1-0.6	6%	4	127	23	NEW	1	7,800
26461	0.4-1.0	6%	4	127	23		1	5,800
26462	0.8-2.0	6%	4	131	30		1	5,800
26463	1.0-5.0	6%	4	138	36		1	5,800
26464	2.0-8.0	6%	4	142	41		1	6,800

• Accuracy ±10% in the range from 0.1-0.46 Nm



285-900 扭力調整起子 Torque-Setter.

Order-No.	150	80	1	380
26864			1	380



291 固定扭力起子 easyTorque torque screwdriver. With a fixed torque value ex-factory.

Order-No.	Nm	○	⊕	⊖	1	2,800
30342 6	0.5	4	103	32	1	2,800
30351 8	3.8	4	103	32	1	2,800



2850 固定式扭力起子 TorqueFix® torque screwdriver.

Order-No.	Nm	±%	○	⊕	⊖	NEW	1	4,400
26925	0.4	6%	4	112	23	NEW	1	4,400
26127	0.5	6%	4	112	23		1	4,400
26047	0.6	6%	4	112	23		1	4,400
26327	0.8	6%	4	112	23		1	4,400
26048	0.9	6%	4	112	23		1	4,400
26133	1.1	6%	4	119	30		1	4,800
26049	1.2	6%	4	119	30		1	4,800
26901	1.5	6%	4	119	30	NEW	1	4,800
26051	2.0	6%	4	119	30		1	4,800
26128	2.5	6%	4	119	30		1	4,800
26052	3.0	6%	4	126	36		1	4,800
26129	3.8	6%	4	126	36		1	5,200
26053	5.0	6%	4	132	41		1	5,800
26130	5.5	6%	4	132	41		1	5,800
34533	6.0	6%	4	132	41		1	5,800
26131	7.2	6%	4	132	41		1	5,800



292 固定式扭力起子 easyTorque torque screwdriver.

Order-No.	Nm	○	⊕	⊖	1	2,500
36229	0.5	4	130	34	1	2,500
36230	0.6	4	130	34	1	2,500
36240	0.9	4	130	34	1	2,500
36231	1.1	4	130	34	1	2,500
36233	1.2	4	130	34	1	2,500
36234	1.4	4	130	34	1	2,500
36235	2.0	4	130	34	1	2,500
36236	2.5	4	130	34	1	2,500
36237	3.0	4	130	34	1	2,500
36238	3.8	4	130	34	1	2,500
36320	4.0	4	130	34	1	2,700
36321	4.5	4	130	34	1	2,700
36239	5.0	4	130	34	1	2,700

貼心小提醒

- 1.當扭力扳手調整到所需扭力操作完後，需將扭力歸零，避免彈簧因長期壓迫而彈性疲乏影響扭力準確度。(只針對彈簧型扭力扳手/達威力除外)
- 2.避免當作拆卸工具使用，導致零件受損。3.避免重摔。4.扭力產品一般有準確度問題與校正問題，原廠建議，在5000次後精準度會疲乏，需進行校驗/校正。
- 5.因要確保扭力準確值，勿隨意拆卸產品任何零件，避免造成使用上的困擾。

Wiha 扭力型 Torque screwdrivers.



帶刻度



2852 S10 13件扭力起子組合

TorqueVario®-S Torque screwdriver set, 13 pcs.

Order-No.	Series		
26893	2852 S10	1	8,000
	2852	TorqueVario®-S Torque screwdriver, Model 1,0-5,0 Nm	
	2859	Torque bit universal holder	
	285-900	Torque-Setter.	
+	7011 Z	PH1x25	PH2x25
+	7012 Z	PZ1x25	PZ2x25
+	7015 Z	T10x25	T15x25 T20x25 T25x25
+	7013 Z	3.0x25	4.0x25

2852-8 8件通用組扭力起子組合

Order-No.	Series		
59902	2852S10	1	8,400
	2852	TorqueVario®-S Torque screwdriver, Model 1.0-5.0Nm	
	285-900	Torque-Setter	
+	2859	T7	T8 T9 T10 T15 T20



2852-6 6件迷你組扭力起子組合

Order-No.	Series		
59901	2852S10	1	7,200
	2852	TorqueVario®-S Torque screwdriver, Model 0.4-1.0Nm	
	285-900	Torque-Setter	
+	2859	T5	T6 T7 T8

2852-11 11件豪華組扭力起子組合

Order-No.	Series		
59903	2852S10	1	14,000
	2852	TorqueVario®-S Torque screwdriver, Model 0.4-1.0 Nm	
		Model 1.0-5.0Nm	
	285-900	Torque-Setter	
+	2859	T5	T6 T7 T8 T9 T10 T15 T20

🔔 扭力保固

- 一、德泰總代理提供扭力起子購買日期起一年內一次免費校驗(校驗為檢查扭力值是否為標準範圍內)·但需自行負擔往來運費。爾後若需再次校驗需另收費用,零件耗損另計·採用ISO校驗設備·非TAF實驗室報告。
- 二、視產品而訂·部份扭力產品有提供“再校正”服務(再校正回原廠設定正負值內·費用另計)
- 三、使用不當或自然磨損、磨耗、生銹與重力敲擊。將不在保固內。
- 四、對於使用壽命有限的產品·將沒有“終身保修”的保證。
費用請洽業務人員



2859 替換一字起子
Torque slotted interchangeable blade.

Order-No.	⊖	⌀	●	↔	↔	max. Nm	🔧	
26227	0.25	1.5	4	175	42	0.15	10	280
26228	0.4	2.0	4	175	42	0.4	10	280
26151	0.4	2.5	4	175	42	0.4	10	280
26277	0.5	3.0	4	175	42	0.6	10	280
26278	0.6	3.5	4	175	42	1.1	10	280
26279	0.8	4.0	4	175	42	2.5	10	280



2859 替換內六角起子
Torque hex interchangeable blade.

Order-No.	⊙	●	↔	↔	max. Nm	🔧	
26544	1.3	4	175	42	0.4	10	280
26200	1.5	4	175	42	0.9	10	280
26060	2.0	4	175	42	1.8	10	280
26061	2.5	4	175	42	3.8	10	280
26062	3.0	4	175	42	5.5	10	280
26063	4.0	4	175	42	8.0	10	280



2859 替換十字起子
Torque Phillips interchangeable blade.

Order-No.	⊕	●	↔	↔	max. Nm	🔧	
26199	PH000	4	175	42	0.4	10	280
26196	PH00	4	175	42	0.4	10	280
26197	PH0	4	175	42	0.9	10	280
26058	PH1	4	175	42	3.8	10	280
27079	PH2	4	175	42	5.5	10	280



2859 替換內六角球頭起子
Torque ball end hex interchangeable blade.

Order-No.	⊙	●	↔	↔	max. Nm	🔧	
26221	1.5	4	175	42	0.4	10	280
26222	2.0	4	175	42	0.9	10	280
26223	2.5	4	175	42	2.0	10	280
26224	3.0	4	175	42	3.8	10	280
26225	4.0	4	175	42	8.0	10	280




2859 替換米字起子
Torque Pozidriv interchangeable blade.

Order-No.	⊕	●	↔	↔	max. Nm	🔧	
26198	PZ0	4	175	42	0.9	10	280
26148	PZ1	4	175	42	3.8	10	280
26889	PZ2	4	175	42	5.5	10	280

貼心小提醒

- 1.當扭力扳手調整到所需扭力操作完後，需將扭力歸零，避免彈簧因長期壓迫而彈性疲乏影響扭力準確度。(只針對彈簧型扭力扳手/達威力除外)
- 2.避免當作拆卸工具使用，導致零件受損。
- 3.扭力產品一般有準度問題與校正問題，原廠建議，在5000次後精準度會疲乏，需進行校驗/校正。
- 4.因要確保扭力準確值，勿隨意拆卸產品任何零件，避免造成使用上的困擾。
- 5.避免重摔。

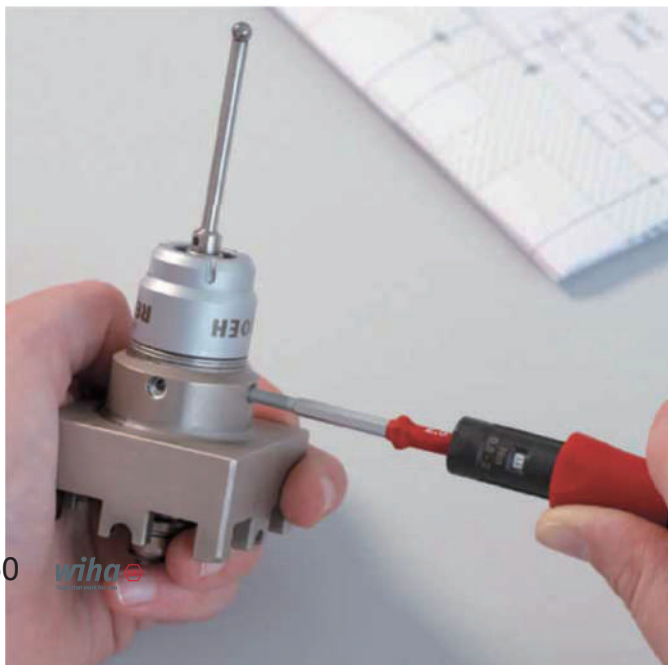

INFOBOX: TorqueFix®



Permanently pre-set torque tools.

- For controlled fastening, e.g. in series production or repetitive usage.
- Distinctly audible and perceptible click signal when set torque is reached.
- Each Wiha screwdriver handle provides a perfectly correlated ratio of guidance, speed and torque for any fastening task.
- Broad selection of interchangeable blades and adapter blades.



2859 替換星型起子
Torque TORX® interchangeable blade.

Order-No.	☀	●	↔	↔	max Nm	☰	
30852	T4	4	175	42	0.25	10	280
26158	T5	4	175	42	0.4	10	280
26064	T6	4	175	42	0.6	10	280
26065	T7	4	175	42	0.9	10	280
26066	T8	4	175	42	1.3	10	280
26059	T9	4	175	42	2.5	10	280
26067	T10	4	175	42	3.7	10	280
26068	T15	4	175	42	5.5	10	280
26069	T20	4	175	42	8.0	10	280
26070	T25	4	175	42	8.0	10	280



2859 替換星型圓角起子
Torque TORX PLUS® interchangeable blade.

Order-No.	☀	●	↔	↔	max Nm	☰	
26159	5IP	4	175	42	0.5	10	280
26071	6IP	4	175	42	0.8	10	280
26152	7IP	4	175	42	1.3	10	280
26072	8IP	4	175	42	2.0	10	280
26154	9IP	4	175	42	3.0	10	280
26155	10IP	4	175	42	4.5	10	280
26073	15IP	4	175	42	6.6	10	280
26156	20IP	4	175	42	8.0	10	280
26157	25IP	4	175	42	8.0	10	280



2859R 替換星型防脫落起子
Torque TORX® MagicSpring® interchangeable blade.

Order-No.	☀	●	↔	↔	max Nm	☰	
27818	T6	4	175	42	0.6	10	380
27812	T7	4	175	42	0.9	10	380
27813	T8	4	175	42	1.3	10	380
27814	T9	4	175	42	2.5	10	380
27815	T10	4	175	42	3.8	10	380
27816	T15	4	175	42	5.5	10	380
27817	T20	4	175	42	8.0	10	380
29467	T25	4	175	42	8.0	10	380



2859 替換星型圓角防脫落起子
Torque TORX PLUS® MagicSpring® interchangeable blade.

Order-No.	☀	●	↔	↔	max Nm	☰	
29553	6IP	4	175	42	0.8	10	380
29554	7IP	4	175	42	1.3	10	380
29555	8IP	4	175	42	2.0	10	380
29556	9IP	4	175	42	3.0	10	380
29557	10IP	4	175	42	4.5	10	380
29558	15IP	4	175	42	6.6	10	380
29559	20IP	4	175	42	8.0	10	380
29560	25IP	4	175	42	8.0	10	380



2859 兩分起子接頭
Torque bit universal holder.

Order-No.	○	●	↔	☰	
27526	1/4	4	162	11	600



2859 兩分套筒接頭
Torque adapter blade.

Order-No.	●	↔	☰	
26229	1/4	4	155	400

Wiha 扭力起子建議表格

☀ T6	0.6Nm
☀ T7	0.9Nm
☀ T8	1.2Nm
☀ T9	1.4Nm
☀ T10	2.0Nm
☀ T15	3.0Nm
☀ T20	5.0Nm
☀ T25	7.5Nm
☀ T30	10.0Nm

以上為德國WIHA扭力起子建議表格，經過確認後，此建議值與山多維克 SANDVIC 進口刀具相同。

以上數據僅供參考



Wiha 絕緣扭力型 Torque VDE screwdrivers.



螺絲起子狹窄33%

- 暢通無障礙
- 擁有VDE和GS認證
- 最大的安全性

前端起子桿直徑減少33%，毫不費力的通過深孔的緊固件和彈簧元件。



- 絕緣塑料材質
- 德國鉻鋼



帶刻度



AC 1000V IEC 60900:2004

2872 絕緣可調式扭力起子
TorqueVario®-S VDE torque screwdriver.

Order-No.	Nm	6%	Ø	+	+		
26625	0.6-2.0	6%	3.8	131	30	1	8,200
26626	1.0-5.0	6%	3.8	138	36	1	9,000
26627	2.0-8.0	6%	3.8	142	41	1	9,500



AC 1000V IEC 60900:2004

2879 絕緣扭力起子接桿
slimTorque VDE bit holder for 6 mm slimBits.

Order-No.	Ø	●	←	→		
35870	6	3.8	170	13	5	900



285-900 扭力調整起子
Torque-Setter.

Order-No.	←	→		
26864	150	80	1	420



2879 絕緣替換一字起子
Torque VDE slotted interchangeable blade.

AC 1000V IEC 60900:2004

Order-No.	⊖	⌀	●	←	→	max. Nm		
26687 5	0.5	3.0	3.8	220	65	0.6	1	425
26688 2	0.6	3.5	3.8	220	65	1.1	1	425
26689 9	0.8	4.0	3.8	220	65	2.5	1	425
26690 5	1.0	5.5	3.8	220	65	3.8	1	425



2879 絕緣替換十字起子
Torque VDE Phillips interchangeable blade.

AC 1000V IEC 60900:2004

Order-No.	⊕	●	←	→	max. Nm		
26691 2	PH0	3.8	220	65	0.9	1	425
26692 9	PH1	3.8	220	65	3.8	1	425
26693 6	PH2	3.8	220	65	5.5	1	425



2879 絕緣替換米字起子
Torque VDE Pozidriv interchangeable blade.

AC 1000V IEC 60900:2004

Order-No.	⊕	●	←	→	max. Nm		
26694 3	PZ0	3.8	220	65	0.9	1	425
26695 0	PZ1	3.8	220	65	3.8	1	425
26696 7	PZ2	3.8	220	65	5.5	1	425

貼心小提醒

- 1.當扭力扳手調整到所需扭力操作完後，需將扭力歸零，避免彈簧因長期壓迫而彈性疲乏影響扭力準確度。(只針對彈簧型扭力扳手/達威力除外)
- 2.避免當作拆卸工具使用，導致零件受損。3.避免重摔。4.扭力產品一般有準度問題與校正問題，原廠建議，在5000次後精準度會疲乏，需進行校驗/校正。
- 5.因要確保扭力準確值，勿隨意拆卸產品任何零件，避免造成使用上的困擾。



2831-10 一字絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, slotted.

Order-No.	①	↔	⊖	⊕			
34578	2.5	75	0,4	6,0	no slim version	1	300
34579	3.0	75	0,5	6,0	no slim version	1	300
34580	4.0	75	0,8	6,0		1	340
34581	5.5	75	1,0	6,0		1	340
34582	6.5	75	1,2	6,0		1	340

2831-11 十字絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, Phillips.

Order-No.	⊕	↔	⊖			
34583	PH1	75	6,0		1	340
34584	PH2	75	6,0		1	340

2831-12 米字絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, Pozidriv.

Order-No.	⊕	↔	⊖			
34585	PZ1	75	6,0		1	340
34586	PZ2	75	6,0		1	340

2831-13 十字割勾絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, Xeno,
for terminal screws (slotted/ Phillips).

Order-No.	⊕	↔	⊖			
34587	SL/PH1	75	6,0		1	400
34588	SL/PH2	75	6,0		1	400

2831-14 米字割勾絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit for terminal
screws (slotted/Pozidriv).

Order-No.	⊕	↔	⊖			
34589	SL/PZ1	75	6,0		1	400
34590	SL/PZ2	75	6,0		1	400

2831-15 星型絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, TORX®

Order-No.	⊕	↔	⊖			
35506	T8	75	6,0		1	400
35507	T10	75	6,0		1	400
35508	T15	75	6,0		1	400
35509	T20	75	6,0		1	400
36071	T25	75	6,0		1	400

2831-17 方形絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, hexagon.

Order-No.	⊕	↔	⊖	⊕	max. Nm		
35510	Robertson 1	2.3	75	6.0	5.5	1	420
35511	Robertson 2	2.8	75	6.0	5.5	1	420

2831-18 六角絕緣細頭替換起子頭 1000 V IEC 60900:2004
SoftFinish® electric slimBit, hexagon.

Order-No.	⊕	↔	⊖	max. Nm		
37222	1.5	75	6.0	0.9	no slim version	1 400
37223	2	75	6.0	1.8	no slim version	1 400
37224	2.5	75	6.0	3.8		1 400
37147	3	75	6.0	5.5		1 400
37225	4	75	6.0	5.5		1 400
37226	5	75	6.0	5.5		1 400
37227	6	75	6.0	5.5		1 400



2970 絕緣扭力頭
for slimBits and slimVario® holder in blister

Order-No.	Nm	±%	↔	⊕		
41341	0,8	10 %	59	5,5	1	1,800
41342	2,0	10 %	59	5,5	1	1,800
41343	2,5	10 %	59	5,5	1	1,800
41344	2,8	10 %	59	5,5	1	1,800
41345	4,0	10 %	59	5,5	1	1,800

INFOBOX:
slimTECHNOLOGY



Wiha SoftFinish® electric slimFix

- Unlimited access.
- Blades up to 33 % narrower due to integrated insulation.
- Tool for spring clips (wedge-profiled output geometry).

Wiha T型扭力型 T-handle torque tools.



特殊複雜的結構EN ISO 6789，機械式的T型設計，舒適的雙色手柄，密封的油潤滑軸承，極低的磨損與替換刀壽命長，扭力到達聲音清楚，±6%精度。

符合人體工舒適手柄德國Wiha 新的T型手柄扭力工具，易於調整，耐用，舒適



- TPR 橡膠
- PP 耐衝擊塑膠
- 德國鉻鉬鋼

2893 T型可調式扭力起子
TorqueVario®-STplus T-handle torque tool.

帶刻度

Order-No.	Nm	○	↕	↔	—	—
29233	5-14	6	56	120	1	10,500

2891 T型固定式扭力起子
TorqueFix®-Tplus T-handle torque tool.

不帶刻度

Order-No.	Nm	○	↕	↔	—	—
29228	6	6	56	120	1	9,500
29229	8	6	56	120	1	9,500
29230	10	6	56	120	1	9,500
29231	12	6	56	120	1	9,500
29236	12.5	6	56	120	1	9,500
29232	14	6	56	120	1	9,500

2893 S01 11件T型扭力起子組合
TorqueVario®-STplus T-handle torque tool set, 11 pcs.

帶刻度

Order-No.	Series	—
29234	2893 S01	1 14,000
Nm	2893 TorqueVario®-STplus T-handle torque tool, Model 5-14 Nm	
↕	289-900 Torque-Tplus Setter	
○	2899 Torque-Tplus adapter blade	
⊙	2899 Torque-Tplus bit universal holder	
●	7015 Z T25x25 T30x25 T40x25	
●	7013 Z 4.0x25 5.0x25 6.0x25	

289-900 扭力調整器
Torque-Tplus Setter.

Order-No.	↕	↔	—
28691	80	150	1 400

2899 星型螺絲替換起子桿
Torque-Tplus TORX® interchangeable blade.

Order-No.	⊙	●	↕	↔	max. Nm	max. in. lbs.	—	—
28734	T15	6	130	53	5.5	49	10	400
28735	T20	6	130	53	10	88	10	400
28736	T25	6	130	53	15	132	10	400
28737	T27	6	130	53	15	132	10	400
28738	T30	6	130	53	15	132	10	400
28739	T40	6	130	53	15	132	10	400

2899 星型螺絲替換起子桿
Torque-Tplus TORX PLUS® interchangeable blade.

Order-No.	⊙	●	↕	↔	max. Nm	max. in. lbs.	—	—
28740	15IP	6	130	53	6.6	59	10	400
28741	20IP	6	130	53	13	115	10	400
28742	25IP	6	130	53	15	132	10	400
28743	27IP	6	130	53	15	132	10	400
28744	30IP	6	130	53	15	132	10	400
28745	40IP	6	130	53	15	132	10	400

2899 內六角螺絲替換起子桿
Torque-Tplus hex interchangeable blade.

Order-No.	●	●	↕	↔	max. Nm	max. in. lbs.	—	—
28746	36	6	130	53	5.5	49	10	400
28747	4	6	130	53	15	132	10	400
28748	56	6	130	53	15	132	10	400
28749	6	6	130	53	15	132	10	400

2899 兩分套筒接頭
Torque-Tplus adapter blade.

Order-No.	○	●	↕	↔	max. Nm	max. in. lbs.	—	—
28756	1/4	6	120	53	100 mm visible length	10	650	
28757	3/8	6	120	53	100 mm visible length	10	650	

2899 兩分快速起子接頭
Torque-Tplus bit quick release holder.

Order-No.	○	●	↕	↔	max. Nm	max. in. lbs.	—	—
28758	1/4	6	125	11	105 mm visible length	10	1,300	

貼心小提醒

- 1.當扭力扳手調整到所需扭力操作完後，需將扭力歸零，避免彈簧因長期壓迫而彈性疲乏影響扭力準確度。(只針對彈簧型扭力扳手/達威力除外)
- 2.避免當作拆卸工具使用，導致零件受損。3.避免重摔。4.扭力產品一般有準度問題與校正問題，原廠建議，在5000次後精準度會疲乏，需進行校驗/校正。
- 5.因要確保扭力準確值，勿隨意拆卸產品任何零件，避免造成使用上的困擾。



- 2889 抗靜電替換星型起子
Torque ESD TORX® interchangeable blade
For torque ESD screwdrivers.

Order-No.	Icon	Length	Width	Depth	Max. Torque	Price
26881 7	T5	4	175	42	0.4	380
26882 4	T6	4	175	42	0.6	380
26868 8	T7	4	175	42	0.9	380
26883 1	T8	4	175	42	1.3	380
26884 8	T9	4	175	42	2.5	380
26885 5	T10	4	175	42	3.8	380



- 2889 抗靜電替換一字起子
Torque ESD slotted interchangeable blade.
For torque ESD screwdrivers.

Order-No.	Icon	Length	Width	Depth	Max. Torque	Price	
26869 5	0.25	1.5	4	175	42	0.15	380
26870 1	0.4	2.0	4	175	42	0.4	380
26871 8	0.5	3.0	4	175	42	0.6	380
26872 5	0.6	3.5	4	175	42	1.1	380
26873 2	0.8	4.0	4	175	42	2.5	380



- 2889 抗靜電替換十字起子
Torque ESD Phillips interchangeable blade.
For torque ESD screwdrivers.

Order-No.	Icon	Length	Width	Depth	Max. Torque	Price
26877 0	PH000	4	175	42	0.4	380
26876 3	PH00	4	175	42	0.4	380
26875 6	PH0	4	175	42	0.9	380
26878 7	PH1	4	175	42	3.8	380



- 2889 抗靜電替換米字起子
Torque ESD Pozidriv interchangeable blade.
For torque ESD screwdrivers.

Order-No.	Icon	Length	Width	Depth	Max. Torque	Price
26879 4	PZ0	4	175	42	0.9	380
26880 0	PZ1	4	175	42	3.8	380



- 2882 抗靜電可調扭力起子
TorqueVario®-S ESD torque screwdriver.
Torque value can be set via window scale.
Automatic release.


Order-No.	Nm	Accuracy	Length	Width	Depth	Price
36851	0.04-0.46	±10%	4	127	23	7,200
26865	0.1-0.6	10%	4	127	23	7,800
26629	0.4-1.0	6%	4	127	23	7,800
26866	0.8-2.0	6%	4	131	30	8,300

• Accuracy ±10% in the range from 0.1-0.46 Nm





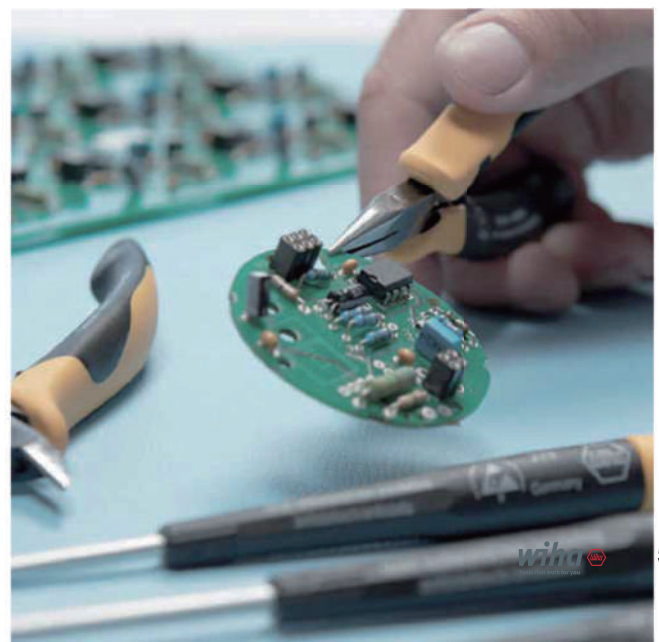























- 2882 S10 13件抗靜電可調扭力起子組
TorqueVario®-S ESD torque screwdriver set, 13 pcs.
Torque value can be set via window scale.
With universal bit holder and 10 straight-blade / Phillips / Pozidriv / TORX® Standard bits.

Order-No.	Series	Price
27687	2882 S10	10,800
2882	TorqueVario®-S ESD, Model 0,8-2,0 Nm	
2889	Torque ESD bit universal holder	
288-900	Torque-Setter ESD	
① 7010 Z	4,0x25 5,5x25	
⊕ 7011 Z	PH0x25 PH1x25	
⊕ 7012 Z	PZ0x25 PZ1x25	
★ 7015 Z	T7x25 T8x25 T9x25 T10x25	



Wiha product range overview / holder overview

All Wiha L-key holders at a glance

Holders	ErgoStar holder	ProStar holder	Compact holder	Classic holder
   				
Holder type	Two-row holder	Two-row holder	Two-row holder	Single-row holder
Description	Wiha ErgoStar: this holder stands for comfortable and fast handling. Mechanical operation in form of rotating enables simple and rapid access to each key without being hindered by the other keys.	Wiha ProStar: this holder stands for simple operation. A sliding function enables removing each individual key without accessing the other keys.	Wiha Compact: this holder stands for a combination of space-saving storage and ideal key fixing	Wiha Classic: this holder stands for quick operation. Short removal distances of the keys achieve time-saving operation.
Features	<ul style="list-style-type: none"> Simultaneous operation of all keys Easy and quick key removal Solid stopping point for fixing L-keys in the holder Innovative clamping ensures L-keys are held firmly in both closed and open state Compact design takes up little space on the bench or in the toolbox Wall bracket for practical storage of the ErgoStar Colour guidance system for output recognition 	<ul style="list-style-type: none"> Sliding function for one-handed opening of the holder Easy and quick removal Compact design takes up little space on the bench or in the toolbox Hanging possible using hanging bracket Colour guidance system for output recognition 	<ul style="list-style-type: none"> Innovative clamping ensures L-keys are held firmly in the holder Very compact holder construction saves room on workbenches and in toolboxes Colour guidance system for output recognition 	<ul style="list-style-type: none"> Easy and very quick key removal Innovative clamping ensures L-keys are held firmly in the holder Solid stopping point for fixing L-keys in the holder Very flat holder construction saves room on workbenches and in toolboxes Hanging possible using hanging bracket Colour guidance system for output recognition
Surfaces	ErgoStar holder	ProStar holder	Compact holder	Classic holder
A = brilliant chrome-plated B = matt chrome-plated C = stainless steel D = nickel-plated E = manganese phosphate				
Profile on page	ErgoStar holder	ProStar holder	Compact holder	Classic holder
Hexagon metric 	 117	 119; 121-122 124-125	 123; 125-128	 121; 123-129
Hexagon inch 	 120	 120; 130-131		 130-131
TORX® 	 133; 137	 134; 138-139		 134; 138-141
TORX PLUS® 				 135; 141
TORX® TR 				 141
Hex with pivot 				





Roll-up bag	Box	Key ring	Workbench stand
-------------	-----	----------	-----------------



Roll-up bag	Box	Key ring	Workbench stand
<p>Bag for variable equipping.</p> <ul style="list-style-type: none"> • Variable equipping 	<p>A practical sliding box for the Wiha L-keys is available to protect against the impact of dirt.</p> <ul style="list-style-type: none"> • Protection against the impact of dirt • Hanging possible using hanging bracket • Colour guidance system for output recognition 	<ul style="list-style-type: none"> • Hanging possible using hanging bracket 	<p>The perfect solution for daily access at the workbench.</p> <ul style="list-style-type: none"> • Hanging possible using hanging bracket on the back

Roll-up bag	Box	Key ring	Workbench stand
-------------	-----	----------	-----------------








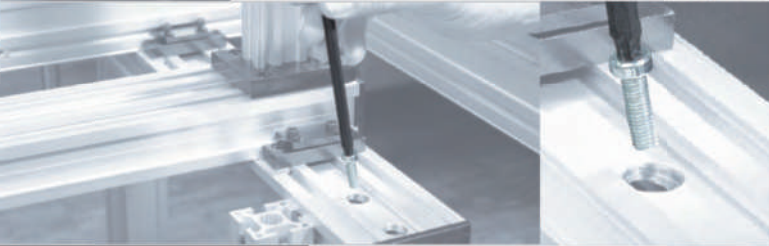

















Roll-up bag	Box	Key ring	Workbench stand
	 132; 126; 128	 128	 128
 129			



Wiha product advantages (specialised solutions)

All Wiha product advantages at a glance


Holder	Logo	Application images	Description		
Ball end			The Wiha ball end stands for mobility, thus enabling fastening of allen screws up to 30° per side.		
TORX® ball end			The Wiha ball end stands for mobility, thus enabling fastening of TORX® screws up to 25° per side.		
MagicRing®			Wiha L-keys with Magic-Ring® hold allen screws firmly in any position thanks to a high-tensile spring steel ring.		
MagicSpring®			Wiha L-keys with Magic-Ring® hold TORX® and TORX PLUS® screws firmly in any position thanks to a high-tensile spring steel ring.		
Stubby			The new L-key from Wiha, especially for hard-to-reach screws and confined spaces.		
Colour coding					
	Hexagon metric	Hexagon inch	TORX®	TORX PLUS®	The Wiha colour guidance system identifies the output category. There is a distinction among the categories Hexagon metric, Hexagon inch, TORX® and TORX PLUS®.
					
					
					

Advantages

- Fastenings at angles up to 30° per side
 - Quick feeding of the key into the screw thanks to feeding from various angles
 - The key does not slip out of the screw, which reduces the risk of accidents
 - No deformation of the screw head thanks to precision fitting of the ball end
-
- Fastenings at angles up to 25° per side
 - Higher torque transmission due to maximum core diameter
 - Elongated profile positioning for further use of the L-key
-
- Thanks to the combination of MagicRing® with the Wiha ball end, inserting and removing screws is possible, even in hard-to-reach locations
 - Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - Can be used for all standard screws
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
 - Fastenings at angles up to 25° per side
-
- Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - TORX® and TORX PLUS® screws manufactured according to Camcar Textron specifications
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
-
- Reduction of the short L-key arm, especially for hard-to-reach screws and confined spaces
 - Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key
 - Improved access through a reduction of the L-key head height of up to 15%
 - Ball end geometry enables fastening at an angle of up to 25°
-
- Handles and holders in the same colour depending on the output size
 - This provides an overview of the tool assortment




Wiha L型內六角扳手 ErgoStar.




30°內六角球頭設計，適合在狹窄作業環境

全部 L 型扳手可以一次動作完成取出，操作更加清楚。



369S 內六角球頭扳手
Ball end hex L-key, long.

Order-No.	●	↔	↔	↔	↔
34755	1.5	91	15	10	130
34756	2	101	18	10	130
34757	2.5	113	20	10	150
34758	3	128	23	10	150
34759	4	142	29	10	200
34760	5	163	33	10	210
34761	6	184	38	10	230
34762	8	206	44	10	350
34763	10	231	50	5	500



SB 369 H9S 9件內六角球頭扳手
Hexagon ball L-key set in ErgoStar holder.
Brilliant chrome-plated, 9 pcs.

Order-No.	Series	↔	↔	↔	↔	↔
34754	SB 369 H9S				5	1,600
●	369S	1.5	2	2.5	34	
		5	6	8	10	



369R 內六角防脫落球頭扳手
Ball end hex L-key, long.
With MagicRing®.

Order-No.	●	↔	↔	↔	↔
20549	3	128	23	10	220
20550	4	142	29	10	220
20570	5	163	33	10	240
20551	6	184	38	10	280
20552	8	206	44	10	380
20553	10	231	50	5	550



SB 369R H9 9件L型六角球頭防脫落扳手組
Hexagon ball end L-key set in ErgoStar holder.
With MagicRing®, chrome-plated, 9 pcs.
Blister packed
With practical wall bracket.

Order-No.	Series	↔	↔	↔	↔	↔	↔
37352	SB 369R H9				5	2,200	
●	369	1.5	2	2.5			
●	369R	3	4	5	6	8	10

Wiha 公制內六角扳手 L-key (metric).



- **369F** 內六角球頭扳手
Ball end hex L-key, long.


Order-No.	●	↔	↔	↔	↔	↔	↔
34269	1.5	91	15	black	10	100	
34270	2	101	18	green	10	100	
34271	2.5	113	20	turquoise	10	100	
34272	3	128	23	light blue	10	110	
34273	4	142	29	purple	10	150	
34274	5	163	33	red	10	170	
34275	6	184	38	orange	10	190	
34276	8	206	44	yellow	10	340	
34277	10	231	50	grey	5	450	



- **369 H9F** 9件內六角球頭扳手
Hexagon ball end L-key set in Classic holder.

Order-No.	Series	●	↔	↔	↔	↔	↔	↔
34268	369 H9F							5 1,320
	369F	1.5	2	2.5	3	4		
		5	6	8	10			

INFOBOX: ErgoStar




The right L-key after just one turn.

- One turn of any L-key and all L-keys are ready for removal.
- Solid stopping point for fixing L-keys in the holder.
- Innovative clamping ensures L-keys are held firmly in both a closed and open position.
- Compact design saves space on the work bench or in the toolbox.
- Wall bracket for practical storage of the ErgoStar holder in the workshop.





- **369R Zoll** 英制內六角防脫落球頭扳手
Ball end hex L-key, long.
With MagicRing®. Inch sizes.

Order-No.	●	↔	↔	↔	mm	↔	↔
29471	0.05	72	13	1.27	10	80	
29472	1/16	80	15	1.59	10	80	
29474	5/64	88	18	1.98	10	90	
29473	3/32	101	20	2.38	10	80	
29475	7/64	111	21	2.78	10	100	
24302	1/8	121	23	3.17	10	230	MagicRing®
24304	9/64	136	27	3.57	10	230	MagicRing®
24303	5/32	148	29	3.96	10	240	MagicRing®
24305	3/16	163	33	4.76	10	260	MagicRing®
24306	7/32	176	36	5.55	10	270	MagicRing®
24307	1/4	191	38	6.35	10	310	MagicRing®
24308	5/16	210	43	7.93	10	420	MagicRing®
24341	3/8	232	50	9.52	10	520	MagicRing®

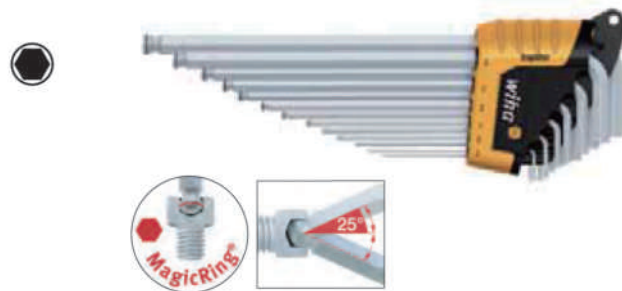

- **SB 369R HZ13** 13件英制內六角防脫落球頭扳手
Hexagon ball end L-key set in ErgoStar holder.
From size 1/8" with MagicRing®, chrome-plated, 13 pc. inch design.

Order-No.	Series	●	↔	↔	↔	↔	↔	↔	↔	↔
36522	SB 369R HZ13									5 2,300
	369 Zoll C	0.05	1/16	5/64	3/32	7/64				
	369R Zoll	1/8	9/64	5/32	3/16	7/32	1/4	5/16	3/8	

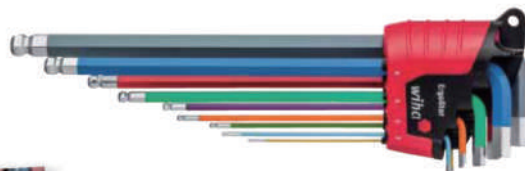

- **SB 369E 9F** 9件L型六角球頭扳手組
Hexagon ball end L-key set in Classic holder.
Blister packed.

Order-No.	Series	●	↔	↔	↔	↔	↔	↔
41484	SB 369E 9F							10
	369F	1.5	2	2.5	3	4	5	6 8
		10						

Wiha 公制內六角扳手 L-key (metric).

1

2

球頭傾斜角度可達25°

■ 德國鉻釩鋼

即使在難以觸及的地方，德國MagicRing®防脫落彈簧圈也能輕鬆、安全的取出螺絲。

369T 內六角球頭扳手(短頭)
Ball end hex L-key, long.

Order-No.	●	↔	↕	↖	↗
35482	1.5	91	5.5	10	100
35483	2	101	9	10	100
35484	2.5	113	9.5	10	100
35485	3	128	11	10	100
35486	4	142	13	10	140
35487	5	163	15	10	160
35488	6	184	18	10	200
35489	8	206	22	10	340
35490	10	231	28	5	450

SB 369T S9 9件短頭內六角球頭扳手
Ball end hex L-key set in ProStar.

Order-No.	●	↔	↕	↖	↗	↘	↙	↚	↛	
35481	SB 369T S9								5	1,450
	369T	1.5	2	2.5	3	4				
		5	6	8	10					

369 內六角球頭扳手
Ball end hex L-key, long.

Order-No.	●	↔	↕	↖	↗	
01392	1.5	91	15	10	85	
01393	2	101	18	10	85	
01395	2.5	113	20	10	85	
01396	3	128	23	10	85	
01398	4	142	29	10	105	
01400	5	163	33	10	120	
01402	6	184	38	10	150	
07922	7	195	39	5	250	
01404	8	206	44	10	270	
36452	9	217	47	NEW	5	300
01406	10	231	50		5	360
01408	12	259	57		5	500

SB 369 S9 9件內六角球頭扳手
Ball end hex L-key set in ProStar.
Chrome-plated, 9 pcs.

Order-No.	●	↔	↕	↖	↗	↘	↙	↚	↛	
07192	SB 369 S9								5	1,250
	369	1.5	2	2.5	3	4	5			
		6	8	10						

369ST L型不鏽鋼六角球頭扳手
Hexagon ball end stainless steel L-key, long.

Order-No.	●	↔	↕	↖	↗	
32635	7	1.5	91	15	10	250
32636	4	2	101	18	10	250
32637	1	2.5	113	20	10	250
32638	8	3	128	23	10	250
32639	5	4	142	29	10	250
32640	1	5	163	33	10	300
32641	8	6	184	38	10	300
32642	5	8	206	44	10	480
32643	2	10	231	50	10	740





352 內六角扳手
Hex L-key, long.

Order-No.	●	↔	↕	↔	↕	
01201	1.5	91	15			10 60
01202	2	101	18			10 45
01203	2.5	113	20			10 45
01204	3	128	23			10 45
01206	4	142	29			10 60
01207	5	163	33			10 75
01208	6	184	38			10 90
01209	7	194	41			5 110
01210	8	206	44			10 130
36450	9	217	47			5 170
01211	10	231	50			5 180
01212	12	259	57			5 235
01213	14	291	70			5 380
01214	17	333	80			5 680
01215	19	375	89			5 900



352B 內六角扳手
Hex L-key, long.

Order-No.	●	↔	↕	↔	↕	
06358	0.7	67	6			5 120
06359	0.9	70	9			5 100
06360	1.3	80	13			5 70
06371	1.4	291	70			5 450



352 H9 9件內六角扳手
Hexagon L-key set in Compact holder.
Nickel-plated, 9 pcs.

Order-No.	Series	↔	↕	
01222	352 H9			5 700
● 352	1.5 2 2.5 3 4 5	6 8 10		




369 H9 9件L型六角球頭扳手組
Hexagon ball end L-key set in Compact holder.
Chrome-plated, 9 pcs.

Order-No.	Series	↔	↕	
01418	369 H9			5 980
● 369	1.5 2 2.5 3 4 5 6 8	10		



352 H7 7件內六角扳手
Hexagon L-key set in Classic holder.
Nickel-plated, 7 pcs.

Order-No.	Series	↔	↕	
01220	352 H7			5 486
● 352	1.5 2 2.5 3 4 5	6		

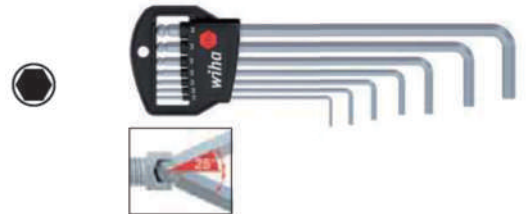

369 H7 7件L型六角球頭扳手組
Hexagon ball end L-key set in Classic holder.
Chrome-plated, 7 pcs.

Order-No.	Series	↔	↕	
01416	369 H7			5 950
● 369	1.5 2 2.5 3 4 5 6			

SB 369 H7 7件內六角球頭扳手
Hexagon ball end L-key set in Compact holder.

Order-No.	Series	↔	↕	
03723	SB 369 H7			10 950
● 369	1.5 2 2.5 3 4 5	6		



369 H11 11件內六角球頭扳手
Hexagon ball end L-key set in Compact holder.
Chrome-plated, 11 pcs.

Order-No.	Series	↔	↕	
36453	369 H11			5 1,700
● 369	1.5 2 2.5 3 4	5 6 7 8 9 10		

SB 369 H11 11件內六角球頭扳手
Hexagon ball end L-key set in Compact holder.
Chrome-plated, 11 pcs.

Order-No.	Series	↔	↕	
36454	SB 369 H11			5 1,700
● 369	1.5 2 2.5 3 4 5	6 7 8 9 10		

Wiha 公制內六角扳手 L-key (metric).



350 L型短六角扳手
Hex L-key, short.

Order-No.	●	┌	└		
01123	2.5	57	20	10	20
01140	22	217	102	1	850
01141	24	241	114	1	1,300
01142	27	271	127	1	1,600
01143	32	339	157	1	3,600



351 內六角扳手
Hex L-key, short.

Order-No.	●	┌	└		
01144	1.5	46	15	10	20
01145	2	51	18	10	20
01146	2.5	57	20	10	20
01147	3	64	23	10	30
01148	3.5	70	26	5	30
01149	4	72	29	10	30
01150	4.5	80	31	5	40
01151	5	83	33	10	40
01152	5.5	90	35	5	55
01153	6	94	38	10	55
01154	7	99	41	5	65
01155	8	105	44	10	80
01156	9	114	47	5	120
01157	10	119	50	5	120
01158	11	129	53	5	150
01159	12	134	57	5	170
01160	14	151	70	5	280
01161	17	173	80	5	450
01162	19	195	89	5	600



359 內六角樞軸扳手
Hex L-key with pivot.

Order-No.	◎	┌	└		
01255	3	64	23	10	90
01256	4	72	29	10	90
01257	5	83	33	10	90
01258	6	94	38	10	110
01259	8	105	44	10	140
01260	10	119	50	5	180
01261	12	134	57	5	280
01262	14	151	70	5	420
01263	17	173	80	5	700

Wiha 小知識

顏色標示:

- 紅色: 公制六角
- 黃色: 英制六角
- 綠色: 星型



350 H9 9件內六角扳手
Hexagon L-key set in Classic holder.
Black finish, 9 pcs.

Order-No.	Series		
06379	350 H9		10 420
	● 350	1.5 2 2.5 3 4	
		5 6 8 10	



350 H7 7件內六角扳手
Hexagon L-key set in Classic holder.
Black finish, 7 pcs.

Order-No.	Series		
06378	350 H7		10 310
	● 350	1.5 2 2.5 3 4 5 6	



351 H11 11件短L型六角扳手
L-key set in Compact holder.
Bright nickel-plated, 11 pcs.

Order-No.	Series		
36449	351 H11		5 660
	● 351	1.5 2 2.5 3 4 5 6 7	
		8 9 10	



SB 369 KH9 9件短L型六角球頭扳手
Hexagonal ball end, 9-pcs., short, matt chrome-plated in blister pack

Order-No.	Series		
40411	SB 369 KH9		5 1,000
	● 369	1.5 2 2.5 3 4 5 6 7	
		8 10	

Wiha 星型防脫落扳手 TORX® MagicSpring®



MagicSpring® 能牢牢環扣住鋁、不鏽鋼、塑膠和鈦製TORX® 星型和TORX PLUS® 螺絲。



MagicSpring® 防脫落彈簧圈的設計，用一個不鏽鋼止動彈簧，上面覆蓋薄圓片，焊接在螺絲起子頭上。



多角度鎖緊：球頭TORX® 鎖螺絲的角度達到25°。



■ 德國鉻鈹鋼



366R

星型防脫落扳手

TORX® MagicSpring® L-key, long.
Retaining spring holds TORX® screws in place.

Order-No.	✳	🔑	🔑	🔑	🔑	🔑
31233	T6	80	15	1/16	10	230
31234	T7	88	18	5/64	10	230
31235	T8	101	20	3/32	10	230
31236	T9	111	21	7/64	10	230
31237	T10	121	23	1/8	10	230
31238	T15	136	27	9/64	10	250
31239	T20	148	29	5/32	10	280
31240	T25	163	33	3/16	10	280
31241	T27	176	36	7/32	10	280
31242	T30	191	38	1/4	10	320
31243	T40	210	43	5/16	10	380
31244	T45	232	50	3/8	10	450



SB 366R H8

8件L型星型防脫落扳手

TORX® MagicSpring® L-key set in Classic holder, 8-pcs.
Retaining spring holds TORX® screws in place.

Order-No.	Series	🔑	🔑
34741	SB 366R H8	10	2,300
✳	366R	T9 T10 T15 T20 T25 T27 T30 T40	



SB 366R HZ13

13件L型星型防脫落扳手

TORX® MagicSpring® L-key set in ErgoStar holder.
Black finish, 13 pcs.

Order-No.	Series	🔑	🔑
36504	SB 366R HZ13	5	3,500
✳	366	T5	
✳	366R	T6 T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 T45	



• SB 366R SZ13

13件星型防脫落扳手

TORX® MagicSpring® L-key set in ProStar holder, 13-pcs.
Retaining spring holds TORX® screws in place.

Order-No.	Series	🔑	🔑
31923	SB 366R SZ13	5	3,500
✳	366	T5	
✳	366R	T6 T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 T45	






366BE 星型球頭扳手
TORX® ball end L-key, long.

Order-No.	Series	Length	Width	Tip	Quantity	Price
32386	T9	111	21	7/64	10	210
32387	T10	121	23	1/8	10	210
32388	T15	136	27	9/64	10	230
32389	T20	148	29	5/32	10	230
32390	T25	163	33	3/16	10	250
32391	T27	176	36	7/32	10	250
32392	T30	191	38	1/4	10	280
32393	T40	210	43	5/16	10	350
33749	T45	232	50	3/8	10	400
33750	T50	232	50	3/8	10	500



• **SB 366BE SZ13** 13件星型球頭扳手
TORX® ball end L-key set in ProStar holder.
Manganese-phosphated, 13 pcs.

Order-No.	Series	Quantity	Price
33752	SB 366BE SZ13	5	3,500
	366	T5 T6 T7 T8	
	366BE	T9 T10 T15 T20 T25 T27 T30 T40	

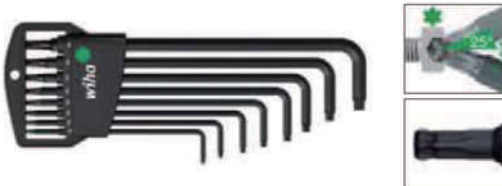

• **SB 366BE H8** 8件星型球頭扳手
TORX® ball end L-key set in Classic holder.
Manganese-phosphated, 8 pcs.

Order-No.	Series	Quantity	Price
32394	366BE H8	5	1,600
	366BE	T9 T10 T15 T20 T25 T27 T30 T40	

Order-No.	Series	Quantity	Price
32395	SB 366BE H8	5	1,600
	366BE	T9 T10 T15 T20 T25 T27 T30 T40	



SB 366BE HZ13 13件L型星型球頭扳手
TORX® ball end L-key set in ErgoStar holder.
Black finish, 13 pcs.

Order-No.	Series	Quantity	Price
36486	SB 366BE HZ13	5	3,500
	366	T5 T6 T7 T8	
	366BE	T9 T10 T15 T20 T25 T27 T30 T40 T45	



366 星型扳手
TORX® L-key, long.

Order-No.	Series	Length	Width	Tip	Quantity	Price
24313	T5	72	13	0.05	10	200
24314	T6	80	15	1/16	10	180
24315	T7	88	18	5/64	10	180
24316	T8	101	20	3/32	10	180
24317	T9	111	21	7/64	10	180
24318	T10	121	23	1/8	10	180
24319	T15	136	27	9/64	10	180
24320	T20	148	29	5/32	10	200
24321	T25	163	33	3/16	10	200
24322	T27	176	36	7/32	10	220
24323	T30	191	38	1/4	10	220
24324	T40	210	43	5/16	10	280
24325	T50	232	50	3/8	10	400



• **SB 366 H8** 8件星型扳手
TORX® L-key set in Classic holder.
Manganese-phosphated, 8 pcs.

Order-No.	Series	Quantity	Price
34737	SB 366 H8	5	1,600
	366	T9 T10 T15 T20 T25 T27 T30 T40	



SB 366 SZ13 13件星型扳手
TORX® L-key set in ProStar holder.
Manganese-phosphated, 13 pcs.

Order-No.	Series	Quantity	Price
24852	SB 366 SZ13	5	2,600
	366	T5 T6 T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 T50	

Wiha 星型扳手 TORX® L-keys.



363 星型扳手
TORX® L-key, short.

Order-No.	Series	Length	Width	Height	Quantity	Price
03764	T5	39	18	2.5	10	160
01310	T6	41	18	2.5	10	150
01311	T7	44	18	2.5	10	150
01312	T8	47	18	2.5	10	150
01313	T9	51	19	3.0	10	150
01314	T10	54	20	3.0	10	150
01315	T15	57	22	3.5	10	150
01316	T20	62	23	4.0	10	160
01317	T25	67	25	4.5	10	160
01318	T27	72	27	5.5	10	180
01319	T30	79	30	6.0	10	180
01320	T40	86	33	7.0	10	240
01321	T45	90	36	8.0	10	280
01322	T50	104	41	9.0	10	320
01323	T55	120	47	12.0	10	400
01324	T60	134	52	14.0	10	550



363 H7 7件L型短星型扳手
TORX® L-key set in Classic holder.
Black finish, 7 pcs.

Order-No.	Series	Quantity	Price
36460	363 H7	5	1,100



363 TR 星型中洞扳手
TORX® Tamper Resistant L-key, short.

Order-No.	Series	Length	Width	Height	Quantity	Price
24105	T7H	44	18	2.5	10	200
24107	T8H	47	18	2.5	10	200
24109	T9H	51	19	3.0	10	200
24111	T10H	54	20	3.0	10	200
24113	T15H	57	22	3.5	10	200
24115	T20H	62	23	4.0	10	220
24117	T25H	67	25	4.5	10	220
24119	T27H	72	27	5.5	10	240
24121	T30H	79	30	6.0	10	260
24123	T40H	86	33	7.0	10	300



361IP 7件L型短星型扳手
TORX PLUS® L-key, short.

Order-No.	Series	Length	Width	Height	Quantity	Price
24519	9IP	51	19	3.0	10	230



SB 363 H8 8件星型扳手
TORX® L-key set in Classic holder.
Manganese-phosphated, 8 pcs.

Order-No.	Series	Quantity	Price
36457	SB 363 H8	5	1,350



363 VB 9件星型扳手
TORX® L-key set in bench stand.
Manganese-phosphated, 9 pcs.

Order-No.	Series	Quantity	Price
01326	363 VB	1	2,800



SB 363TR H8 8件星型中洞扳手
TORX® Tamper Resistant L-key set in Classic holder.
Manganese-phosphated, 8 pcs.

Order-No.	Series	Quantity	Price
36458	SB 363TR H8	5	1,800



361IP H9 9件L型星型圓角扳手
TORX PLUS® L-key set in holder.
Manganese-phosphated, 9 pcs.

Order-No.	Series	Quantity	Price
26246	361IP H9	5	2,300

Wiha 摺疊式扳手 PocketStar.



從事高安全工作時，270°處的鎖定設計，確保扳手不會被扳過頭而壓住手。



各角度的工作位置：

- 在180°位置時，可以當螺絲起子使用。
- 在270°時，可以當槓桿使用。
- 90°與270°之間任何角度，適合不同的工作。

創新的開關設計
輕鬆選出所需產品



■ 玻璃纖維
■ 德國鉻鈹鋼



SB 369R P7 13件摺疊角扳手
Ball end hex fold out holder PocketStar.
With MagicRing®, in large PocketStar, 7 pcs.

Order-No.	Series						
23033	SB 369R P7					5	1,500
	2	2.5	3	4	5		
	6	8					



SB 351 PK7 7件摺疊式六角扳手
Hex fold out holder PocketStar.
In small PocketStar, 7 pcs.

Order-No.	Series						
23037	SB 351 PK7					5	850
	1.5	2	2.5	3	4	5	6



SB 363TR P8 8件摺疊星型中洞扳手
TORX® Tamper Resistant fold out holder
PocketStar. In large PocketStar, 8 pcs.

Order-No.	Series						
25166	SB 363TR P8					5	1,500
	T9H	T10H	rT15H	T20H	T25H	T27H	
	T30H	T40H					

• 星型中洞也適用於星型螺絲，但不可顛倒使用。

SB 363TR P7 7件摺疊式星型中洞扳手
TORX® Tamper Resistant fold out holder PocketStar.
In small PocketStar, 7 pcs.

Order-No.	Series						
25164	SB 363TR P7					5	1,400

SB 363 P8 8件摺疊星型扳手
TORX® fold out holder PocketStar.
In large PocketStar, 8 pcs.

Order-No.	Series						
23049	SB 363 P8					5	1,300
	T9	T10	T15	T20	T25	T27	
	T30	T40					

SB 363 P7 7件摺疊式星型扳手
TORX® fold out holder PocketStar.
In small PocketStar, 7 pcs.
Blister packed with hanging hole.

Order-No.	Series						
23053	SB 363 P7					5	1,200

SB 351 PG9X 9件摺疊綜合扳手
Fold out holder PocketStar containing assorted
keys. In large PocketStar, 9 pcs.

Order-No.	Series						
25295	SB 351 PG9X					5	1,250
⓪	4.5						
⊕	PH2						
⊗	T10	T15	T20				
●	3	4	5	6			

Order-No.	Series						
25293	351 PG9X					5	1,250
⓪	4.5						
⊕	PH2						
⊗	T10	T15	T20				
●	3	4	5	6			



Wiha 專業T型扳手 ComfortGrip T-handle.



側邊扳手扭距大，用一隻手固定手柄，可保持穩定，防止扳手滑落。



起子桿貫穿手柄
延伸至側面當扳手使用



充分利用整個手柄表面
· 達到最佳扭距傳達。

■ TPR 橡膠
■ PP 耐衝擊塑膠
■ 德國鉻釩鋼



■ PP 耐衝擊塑膠
■ 德國鉻釩鋼



540DS 專業T型內六角球頭扳手
Hexagon ball end screwdriver with ComfortGrip.
With side blade.

Order-No.	●	↔	↔	↔	↔	↔	
28372	3	150	13	80	26	10	330
28373	4	150	13	80	26	10	330
28374	5	150	17	100	32	10	400
28375	6	150	17	100	32	10	460
28376	8	200	17	100	32	10	650
28377	10	200	22	120	38	10	880



364DS 專業T型星型扳手
TORX® driver with ComfortGrip. With side blade.

Order-No.	★	↔	↔	↔	↔	↔	
26172	T10	100	13	80	26	10	550
26173	T15	100	13	80	26	10	550
26174	T20	100	17	100	32	10	640
26175	T25	150	17	100	32	10	640
26176	T27	150	17	100	32	10	640
26177	T30	150	17	100	32	10	640
26178	T40	150	17	100	32	10	700



334 DS 專業T型內六角扳手
Hex driver with ComfortGrip. With side blade.

Order-No.	●	↔	↔	↔	↔	↔	
26164	2	100	13	80	26	10	260
26165	2.5	100	13	80	26	10	260
26166	3	100	13	80	26	10	260
26167	4	150	13	80	26	10	260
26168	5	150	17	100	32	10	320
26169	6	150	17	100	32	10	320
26170	8	200	17	100	32	10	420
26171	10	200	22	120	38	10	750



334DS K6 6件專業T型內六角扳手
Hex driver set with ComfortGrip, 6 pcs.

Order-No.	●	↔	↔	↔	↔	↔	
26247	334DS K6						1 1,650
	334DS	2.5	3	4	5		
		6	8				



334DSR 專業T型內六角扳手
Hex driver with ComfortGrip.
With MagicRing® and side blade.

Order-No.	●	↔	↔	↔	↔	↔	
26135	3	100	13	80	26	10	370
26136	4	150	13	80	26	10	420
26137	5	150	17	100	32	10	450
26138	6	150	17	100	32	10	480
26139	8	200	17	100	32	10	600
26140	10	200	22	120	38	10	950



364DS K6 6件專業T型星型扳手
TORX® driver set with ComfortGrip.

Order-No.	★	↔	↔	↔	↔	↔	
26248	364DS K6						1 3,300
	364DS	T10	T15	T20	T25		
		T30	T40				

Wiha 經典T型扳手 Classic T-handle.



334 經典T型內六角扳手
Hex driver with T-handle

Order-No.	●	—	○	—	—	—	—	—
00904	2	100	-	126	80	26	10	180
00905	2	200	-	226	80	26	10	250
00906	2.5	100	-	126	80	26	10	180
00907	2.5	200	-	226	80	26	10	250
00908	3	100	-	126	80	26	10	180
00909	3	150	-	176	80	26	10	180
00910	3	200	-	226	80	26	10	210
00911	3	350	5+	382	100	32	10	480
00912	4	100	-	126	80	26	10	180
00913	4	150	-	176	80	26	10	180
00914	4	200	-	226	80	26	10	210
00915	4	350	5+	382	100	32	10	480
00916	5	100	-	132	100	32	10	180
00917	5	150	-	182	100	32	10	210
00918	5	200	-	232	100	32	10	250
00919	5	350	-	382	100	32	10	400
00921	6	100	-	132	100	32	10	230
00922	6	150	-	182	100	32	10	230
00923	6	200	-	232	100	32	10	260
00924	6	350	-	382	100	32	10	450
00926	7	200	-	232	100	32	10	310
00928	8	100	-	132	100	32	10	260
00929	8	150	-	182	100	32	10	290
00930	8	200	-	232	100	32	10	310
00931	8	350	-	372	100	32	10	500
00933	10	100	-	138	120	38	10	450
00934	10	200	-	238	120	38	10	560
00937	12	200	-	238	120	38	5	750

+ Overlength with reinforced blade.



334 VB 7件經典T型內六角扳手
Hex driver set with T-handle.
In bench stand, 7 pcs.

Order-No.	Series					—	
00953	334 VB					1	2,000
●	334	2x100	2.5x100	3x100	4x150		
●		5x150	6x200	8x200			



336 經典T型六角套筒扳手
Hex nut driver with T-handle.

Order-No.	○	—	—	—	—	—	—
00965	5.5	125	157	100	32	10	450
00966	6	125	157	100	32	10	450
00967	6	200	232	100	32	10	580
00968	7	125	157	100	32	10	450
00969	7	200	232	100	32	10	580
00970	7	350	382	100	32	10	630
00971	8	125	157	100	32	10	450
00972	8	200	232	100	32	10	580
00973	8	350	382	100	32	10	630
00974	9	125	157	100	32	10	580
00975	9	200	232	100	32	10	630
00977	10	125	157	100	32	10	580
00978	10	200	232	100	32	10	630
00979	10	230	262	100	32	10	630
00980	10	350	382	100	32	10	700
00982	11	125	157	100	32	10	630
00983	11	230	262	100	32	5	750
00985	12	125	157	100	32	10	630
00986	12	230	262	100	32	5	780
00988	13	125	157	100	32	10	700
00989	13	230	262	100	32	10	850
00990	13	350	382	100	32	10	920
00991	14	125	157	100	32	5	850
00993	15	125	157	100	32	5	850
00994	16	125	157	100	32	5	1,000
00995	17	125	157	100	32	5	1,100



334 Zoll 經典T型英制內六角扳手
Hex driver with T-handle. Inch sizes.

Order-No.	●	—	—	—	—	mm	—	
02802	3/32	150	182	80	26	2.38	10	250
02803	7/64	150	182	80	26	2.78	10	250
02804	1/8	150	182	80	26	3.18	10	250
02805	9/64	150	182	80	26	3.57	10	250
02806	5/32	150	182	80	26	3.97	10	250
02807	3/16	150	182	100	32	4.76	10	250
02808	7/32	150	182	100	32	5.56	10	280
02809	1/4	150	182	100	32	6.35	10	300
02810	5/16	150	182	100	32	7.94	10	330
02811	3/8	150	188	120	38	9.53	10	560



336 Zoll 經典T型英制內六角套筒扳手
Hex nut driver with T-handle. Inch sizes.

Order-No.	○	—	—	—	—	mm	—	
02819	3/16	150	182	100	32	4.76	10	470
02820	1/4	150	182	100	32	6.35	10	520
02821	5/16	150	182	100	32	7.94	10	600
02822	3/8	150	182	100	32	9.53	10	600
02823	7/16	150	182	100	32	11.11	10	720
02824	1/2	150	182	100	32	12.70	10	800

Wiha 星型扳手 TORX® L-keys.



364 經典T型星型扳手
TORX® driver with T-handle.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
01328	T9	100	4.0	126	80	26	10	400
01329	T10	100	4.0	126	80	26	10	400
01330	T15	100	4.0	126	80	26	10	400
01331	T15	200	5.5	226	80	26	10	500
01332	T20	100	4.0	132	100	32	10	460
01333	T20	200	5.5	232	100	32	10	560
01334	T25	100	4.5	132	100	32	10	460
01335	T25	200	5.5	232	100	32	10	590
01336	T27	100	5.5	132	100	32	10	460
01337	T27	200	5.5	232	100	32	10	590
01338	T30	100	6.0	132	100	32	10	460
01339	T30	200	6.0	232	100	32	10	620
01340	T40	100	7.0	132	100	32	10	490
01341	T40	200	7.0	232	100	32	10	690
01343	T45	250	8.0	288	120	38	10	900
01345	T50	250	9.0	288	120	38	10	1,050



364 VB 7件經典T型星型扳手
TORX® driver set with T-handle.
In bench stand, 7 pcs.

Order-No.	Series	Quantity	Price
01348	364 VB	1	4,200



364R 經典T型星型扳手
TORX® driver with T-handle.
With MagicSpring®.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
27964	T9	100	4.0	126	80	26	10	540
27965	T10	100	4.0	126	80	26	10	560
27966	T15	100	4.0	126	80	26	10	560
27967	T20	100	4.0	132	100	32	10	580
27968	T25	100	5.0	132	100	32	10	580
27969	T27	100	6.0	132	100	32	10	640
27970	T30	100	6.0	132	100	32	10	660
27971	T40	100	8.0	132	100	32	10	700



364IP 經典星型圓角扳手
TORX PLUS® driver with T-handle.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
26953	9IP	100	4.0	126	80	26	10	600
26954	10IP	100	4.0	126	80	26	10	600
26955	15IP	100	4.0	126	80	26	10	600
26956	20IP	100	4.0	132	100	32	10	650
26957	25IP	150	4.5	182	100	32	10	700
26958	27IP	150	5.5	182	100	32	10	780
26959	30IP	150	6.0	182	100	32	10	880
26960	40IP	150	7.0	182	100	32	10	880



224 米字雙頭扳手
Pozidriv offset screwdriver with handle.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
00432	PZ1	PZ2	125	14.5	5.5		10	400
00433	PZ2	PZ3	150	21.0	8.0		10	600
00434	PZ3	PZ4	200	25.0	10.0		10	750



161 十字雙頭扳手
Phillips offset screwdriver with handle.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
00146	PH3 PH4	200	25.0	10.0			10	640



336N 經典T型絕緣六角套筒扳手
VDE T-handle hex nut driver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
27932	8	200	232	100	32		5	1,200
27933	10	230	262	100	32		5	1,300
27934	13	230	262	100	32		5	1,400
27935	17	230	268	120	38		5	1,600



334N 經典T型絕緣內六角扳手
VDE T-handle hex screwdriver.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.


Order-No.	Series	Length	Tip Length	Tip Width	Tip Height	Tip Thickness	Quantity	Price
27928	4	150	176	80	26		5	500
27929	5	150	182	100	32		5	550
27930	6	150	182	100	32		5	600
27931	8	150	182	100	32		5	700

Wiha 旗型和蝴蝶型扳手 Flag and key handle.



創新的扭力螺絲起子桿，尺寸從 T5-T10。不會損壞貴重的緊固螺絲或工具形體。

- PP 耐衝擊塑膠
- PP 耐衝擊塑膠
- PP 耐衝擊塑膠
- 德國鉻釩鋼



331 經典蝴蝶型內六角扳手
Hex driver with key handle.

Order-No.	●	⌘	⌘	⌘	⌘	⌘
00894	1.5	60	95	40	10	180
00895	2	60	95	40	10	180
00896	2.5	60	95	40	10	180
00897	3	60	95	40	10	180



365 IP 經典蝴蝶型星型圓角扳手
TORX PLUS® driver with key handle.

Order-No.	●	⌘	●	⌘	⌘	⌘
26181	5IP	35	2.0	70	40	10 340
26182	6IP	35	2.0	70	40	10 340
26183	7IP	35	2.5	70	40	10 340
26184	8IP	40	2.5	75	40	10 340
26185	9IP	40	3.0	75	40	10 360
26186	10IP	40	3.0	75	40	10 360
26187	15IP	45	3.5	80	40	10 360
26188	20IP	45	4.0	80	40	10 450



365IP VB 7件經典蝴蝶型星型圓角扳手
TORX PLUS® driver set with key handle.
In small bench stand, 7 pcs.

Order-No.	Series	⌘
26261	365IP VB	1 2,600
●	365IP	6IPx35 7IPx35 8IPx40 9IPx40 10IPx40 15IPx45 20IPx45



365 經典蝴蝶型星型扳手
TORX® driver with key handle.

Order-No.	●	⌘	●	⌘	⌘	⌘
04918	T5	35	2.0	70	40	10 215
01350	T6	35	2.0	70	40	10 215
01351	T7	35	2.5	70	40	10 215
01352	T8	40	2.5	75	40	10 215
01353	T9	40	3.0	75	40	10 215
01354	T10	40	3.0	75	40	10 215
01355	T15	45	3.5	80	40	10 230
01356	T20	45	4.0	80	40	10 260



365 VB 7件經典蝴蝶型星型扳手
TORX® screwdriver set with key handle.
In small bench stand, 7 pcs.

Order-No.	Series	⌘
25624	365 VB	1 1,800
●	365	T6x35 T7x35 T8x40 T9x40 T10x40 T15x45 T20x45



370 經典旗型星型扳手
TORX® driver with flag handle.

Order-No.	●	⌘	●	⌘	⌘	⌘
03724	T5	35	2.0	62	15	10 225
03725	T6	35	2.0	62	15	10 225
03726	T7	35	2.5	67	19	10 225
03727	T8	40	2.5	72	19	10 225
03728	T9	40	3.0	74	24	10 250
03729	T10	40	3.0	74	24	10 270
03730	T15	45	3.5	80	28	10 270
03731	T20	45	4.0	80	28	10 300




370 VB 7件經典旗型星型扳手
TORX® driver set with flag handle.
In small bench stand, 7 pcs.


Order-No.	Series	⌘
25625	370 VB	1 1,900
●	370	T6x35 T7x35 T8x40 T9x40 T10x40 T15x45 T20x45

Wiha MaxxTor family.

Maximum torsion.

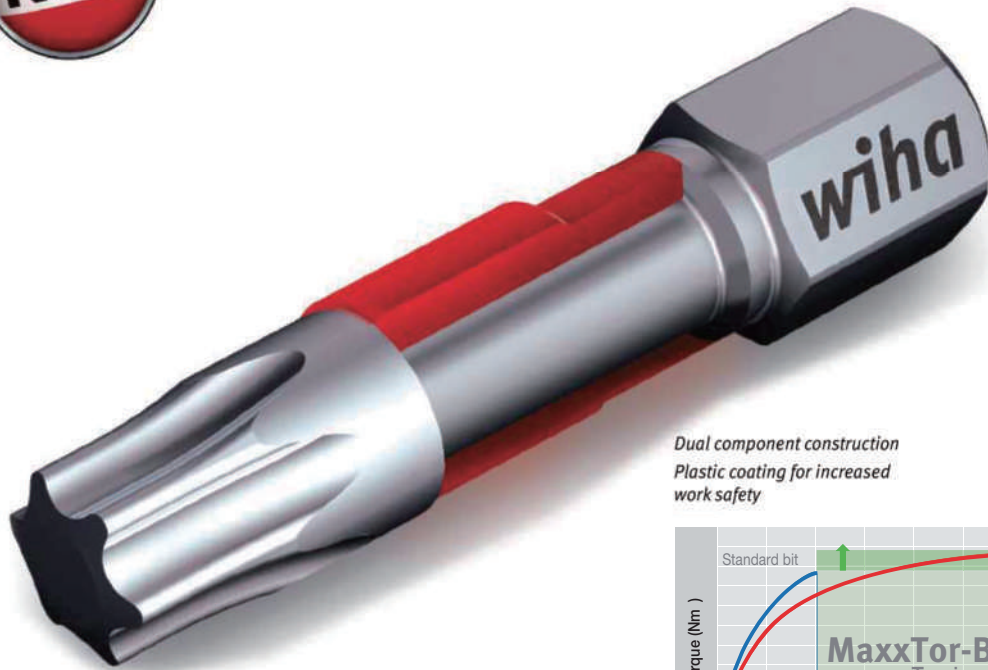

*Dual component construction
Plastic coating for increased
work safety*

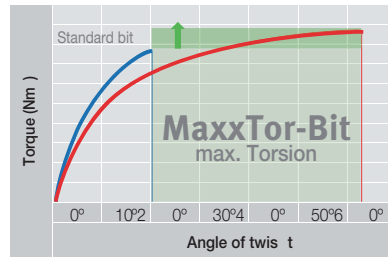

29er

The ultimate torsion bit – plus 4 mm length

- Optimal access to low-lying fastening elements
- A better view of the bit tip
- Simple handling with bit changing and bit storage
- E 6.3 drive

49er

The ultimate impact bit

- X-times longer tool life with impact use
- Greater work safety, no flying chips
- E 6.3 drive

Wiha MaxxTor family

- Maximum torsion zone
- Service life several times longer than standard or torsion bits
- Optimised for tough fastening – impact applications
- Ideal for high-performance drill and impact screwdrivers
- Dual component construction – CA coating for increased work safety
- E 6.3 drive – perfect functionality in modern impact screwdrivers
- Impact-tested



Wiha 戰神 MaxxTor.



- 加長 4mm 更簡易操作
- 簡易操作使用
- 容易辨識
- 容易替換
- C6.3 快速接桿

- 高壽命 · 衝擊使用
- 安全工作
- E6.3 起子桿

- 高密度衝擊透明塑膠
- 德國合金鋼



創新設計：
使用高硬度耐衝擊透明塑膠
包覆增加工作安全性



7011 M9T 戰神十字扭力起子頭 C6.3型

29er MaxxTor bit, Phillips, style C 6.3.

材質：德國合金鋼 · 特殊熱處理 · 特殊鍍鉻表面
高硬度耐衝擊透明塑膠

幾何技術：最長扭力區設計

Wiha精密技術 · 讓起子頭準確貼合螺絲，達到最佳效能

標準：DIN3126 · ISO1173

功能：使用壽命優於一般起子頭 · Maxx扭力起子頭

適用：適用於高扭力電動起子 · 氣動起子

Order-No.	+	↔	↔	
36812	PH1	29	5	120
36813	PH2	29	5	120
36814	PH3	29	5	120

7015 M9T 戰神星型扭力起子頭 C6.3型

29er MaxxTor bit, TORX®, style C 6.3.

Order-No.	*	↔	↔	
36822	T10	29	5	130
36823	T15	29	5	130
36824	T20	29	5	130
36825	T25	29	5	130
36826	T30	29	5	130
36827	T40	29	5	130

7013 M9T 戰神內六角扭力起子頭 C6.3型

29er MaxxTor bit, hexagon, style C 6.3.

Order-No.	●	↔	↔	
36818	3.0	29	5	130
36819	4.0	29	5	130
36820	5.0	29	5	130
36821	6.0	29	5	130

7012 戰神米字扭力起子頭 29er® MaxxTor bit

Order-No.	Content	Quantity		
36816	7012 M9T	5 PZ2x29	NEW	120



7041 M9T 戰神十字扭力起子頭 E6.3型

49er MaxxTor bit, Phillips, style E 6.3.

材質：德國合金鋼 · 特殊熱處理 · 特殊鍍鉻表面
高硬度耐衝擊透明塑膠

幾何技術：最長扭力區設計

Wiha精密技術 · 讓起子頭準確貼合螺絲，達到最佳效能

標準：DIN3126 · ISO1173

功能：使用壽命優於一般起子頭 · Maxx扭力起子頭

適用：適用於高扭力電動起子 · 氣動起子

Order-No.	+	↔	↔	
36828	PH1	49	5	160
36829	PH2	49	5	160
36830	PH3	49	5	160

7045 M9T 戰神星型扭力起子頭 E6.3型

49er MaxxTor bit, TORX®, style E 6.3.

Order-No.	*	↔	↔	
36838	T10	49	5	180
36839	T15	49	5	180
36840	T20	49	5	180
36841	T25	49	5	180
36842	T30	49	5	180
36843	T40	49	5	180

7043 M9T 戰神內六角扭力起子頭 E6.3型

49er MaxxTor bit, hexagon, style E 6.3.

Order-No.	●	↔	↔	
36834	3.0	49	5	180
36835	4.0	49	5	180
36836	5.0	49	5	180
36837	6.0	49	5	180

SB 7946-TY303 Hexagon 1/4" 7-pcs.



Order-No.		
42114		6
	2 x SW3 / 2 x SW4 / 2 x SW5 / 1 x SW6	2,000

SB 7946-TY904 7件戰神綜合扭力起子套組

Phillips, Pozidriv, TORX®, 7-pcs., 1/4"

Order-No.		
42117		6 1,800
+	1 x PH2	
*	1 x PZ1 / 1 x PZ2	
●	1 x T10 / 1 x T15 / 1 x T20 / 1 x T25	

Wiha 戰神 MaxxTor.



Order-No.	Icon	Quantity	Price
42097	⊕ 5 x PH1	5	1,000
42119	⊕ 5 x PH2	5	1,000
42120	⊕ 5 x PH3	5	1,000
42121	⊗ 5 x PZ1	5	1,000
42122	⊗ 5 x PZ2	5	1,000
42123	⊗ 5 x PZ3	5	1,000
42124	● 5 x SW3	5	1,000
42125	● 5 x SW4	5	1,000
42126	● 5 x SW5	5	1,000
42127	● 5 x SW6	5	1,000
42128	⊗ 5 x T10	5	1,000
42129	⊗ 5 x T15	5	1,000
42130	⊗ 5 x T20	5	1,000
42131	⊗ 5 x T25	5	1,000
42132	⊗ 5 x T27	5	1,000
42133	⊗ 5 x T30	5	1,000
42134	⊗ 5 x T40	5	1,000



Order-No.	Icon	Quantity	Price
42096	⊕ 5 x PH1	5	680
42100	⊕ 5 x PH2	5	680
42101	⊕ 5 x PH3	5	680
42149	⊗ 5 x PZ1	5	680
42102	⊗ 5 x PZ2	5	680
42103	⊗ 5 x PZ3	5	680
42104	● 5 x SW3	5	680
42105	● 5 x SW4	5	680
42106	● 5 x SW5	5	680
42107	● 5 x SW6	5	680
42108	⊗ 5 x T10	5	680
42109	⊗ 5 x T15	5	680
42110	⊗ 5 x T20	5	680
42111	⊗ 5 x T25	5	680
42112	⊗ 5 x T27	5	680
42113	⊗ 5 x T30	5	680
42150	⊗ 5 x T40	5	680

Wiha 黃金戰士 DuraBit.

DuraBit 創新的實力考驗。在扭轉時，有著極其抗磨損的金屬硬塗層，形成一個安全堅固的起子頭。




革命性的塗層技術優勢：起子頭壽命延長，傑出的操控性。

碳化鎢砂粉(鋼)顆粒，永久包覆於起子頭尖端 - 打滑問題，與傳統的金鑽石塗層相比，顯著降低。


硬金屬塗層，減少打滑情況的發生，並且起子桿耐磨損，延長使用壽命。

德國鉻鈦鋼

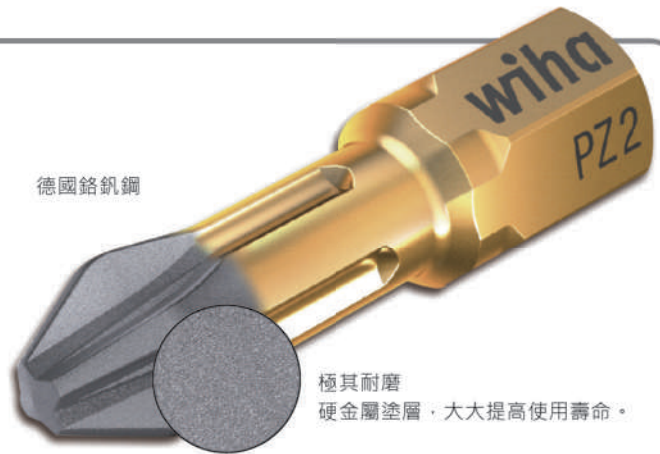

極其耐磨
硬金屬塗層，大大提高使用壽命。

Wiha 小知識



- 極其耐磨，表面硬金屬塗層，安全堅固，可用於航太業。
- 鎳塗層處理耐腐蝕。
- 碳化鎢砂粉(鋼)顆粒，延長使用壽命，大大的減少了震動時，產生的脫落，讓起子頭防止從螺絲打滑。



7015 TIN 星型起子頭
TiN Torsion bit, TORX®, style C 6.3.

Order-No.	Icon	Quantity	Price
20974	T15	25	10 60




7011 HOT 十字起子頭
HOT Torsion bit, Phillips, style C 6.3.

Order-No.	Icon	Quantity	Price
04485	PH2	25	10 60

Wiha 雙頭起子 Double ended torsion bits .



■ 德國鉻釩鋼



Torsion Zone 特殊扭力區
 特殊扭力區設計，可以減少高轉數所產生震動力
 特殊扭力區設計，讓起子頭的壽命加倍



744191 十字雙頭扭力起子頭 65mm
 Double ended torsion bit, Phillips, style C 6.3.
 材質: 德國鉻釩鋼·熱處理
 工程學: 特殊扭力區設計，可以減少高轉速所產生的震動力
 塗層: 硬金屬塗層·極耐磨損
 接桿: DIN 3126 · ISO 1173 · 樣式 C 6.3.





744191 十字雙頭扭力起子頭 110mm
 Double ended torsion bit, Phillips, style C 6.3.
 材質: 德國鉻釩鋼·熱處理
 工程學: 特殊扭力區設計，可以減少高轉速所產生的震動力
 塗層: 硬金屬塗層·極耐磨損
 接桿: DIN 3126 · ISO 1173 · 樣式 C 6.3.

Order-No.	Series	
37003	7441912065 2Hx65 Set 10pcs. Double End Torsion Bit	10

Order-No.	Series	
37005	7441912110 2Hx110 Set 10pcs. Double End Torsion Bit	10



Wiha 標準型起子頭 Standard bit.



■ 德國鉻鈦鋼



高品質的基本材料許可證

扭力值，遠遠超出了DIN標準：

- DIN5261 PH十字 / PZ米字起子頭
- DIN5263 一字起子頭
- TORX® 星型和 TORX PLUS® 星型圓角起子頭

- **7010Z** 一字起子頭 · C6.3型
Standard bit, slotted, style C 6.3.

Order-No.	Ø	↔	⊖	↔	
01623	4.5	25	0.6		10 60
01624	5.5	25	0.8		10 60
01626	6.5	25	1.2		10 60
01627	8.0	25	1.6		10 60

- **7011Z** 十字起子頭 · C6.3型
Standard bit, Phillips, style C 6.3.

Order-No.	⊕	↔	↔	
05298	PH0	25		10 50
01657	PH1	25		10 38
01658	PH2	25		10 38
01659	PH3	25		10 38
01649	PH4	32		10 200

- **7012Z** 米字起子頭 · C6.3型
Standard bit, Pozidriv, style C 6.3.

Order-No.	⊕	↔	↔	
05300	P20	25		10 50
01688	PZ1	25		10 38
01689	PZ2	25		10 38
01690	PZ3	25		10 38

- **7015Z** 星型起子頭 · C6.3型
Standard bit, TORX®, style C 6.3.

Order-No.	⊛	↔	↔	
26250	T3	25		10 100
25097	T4	25		10 100
01711	T5	25		10 60
01712	T6	25		10 60
01713	T7	25		10 60
01714	T8	25		10 60
01715	T9	25		10 60
01716	T10	25		10 60
01717	T15	25		10 60
01718	T20	25		10 60
01719	T25	25		10 60
01720	T27	25		10 60
01721	T30	25		10 60
01722	T40	25		10 60
01723	T45	35		10 210
01724	T50	35		10 210

- **7015Z T** 星型起子頭
ZOT Torsion bit, TORX®, style C 6.3.

Order-No.				
20950	T15	25	10	100

- **7015Z TR** 星型中洞起子頭 · C6.3型
Standard bit, TORX® H, style C 6.3.

Order-No.	⊛	↔	↔	
03115	T7H	25		10 140
03117	T8H	25		10 140
01726	T9H	25		10 140
01727	T10H	25		10 140
01728	T15H	25		10 140
01729	T20H	25		10 140
01730	T25H	25		10 140
01731	T27H	25		10 140
01732	T30H	25		10 140
01733	T40H	25		10 140

- 星型中洞也適用於星型螺絲，但不可顛倒使用。

- **7013Z** 內六角起子頭 · C6.3型
Standard bit, hex, style C 6.3.

Order-No.	⊙	↔	↔	
04011	1.5	25		10 140
01703	2.0	25		10 140
01704	2.5	25		10 140
01705	3.0	25		10 140
01706	4.0	25		10 140
01707	5.0	25		10 140
01708	6.0	25		10 140
01709	8.0	25		10 180
01710	10.0	25		10 200



- **7016Z IPR** 五角星型圓角起子頭
Standard bit, TORX PLUS® Security, style C 6.3.

Order-No.	⊛	↔	↔	
26347	15IPR	25		10 400
26348	20IPR	25		10 400
26349	25IPR	25		10 400
26351	40IPR	35		10 400



- **7013RZ** 內六角防脫落起子頭 · C6.3型
Standard bit, hex, style C 6.3.

Order-No.	⊙	↔	↔	
22955	3.0	25		10 170
22956	4.0	25		10 170
22957	5.0	25		10 170
22958	6.0	25		10 170

Wiha 標準型起子頭 Standard bit.



- **7013 Z TR** 內六角中洞起子頭 · C6.3型
Standard bit, hex Tamper Resistant, style C 6.3.

Order-No.	☉	↔	▬	
25560	TR2.0	25	10	230
25561	TR2.5	25	10	230
25562	TR3.0	25	10	230
25563	TR4.0	25	10	230
25564	TR5.0	25	10	230
20560	TR9/64	25	10	230

• 內六角中洞也適用於內六角螺絲，但不可顛倒使用。



- **7016 Z** 星型圓角起子頭
Standard bit, TORX PLUS®, style C 6.3.

Order-No.	☉	↔	▬	
25994	3IP	25	10	180
25996	4IP	25	10	180
23173	6IP	25	10	300
23175	7IP	25	10	180
23177	8IP	25	10	180
23179	9IP	25	10	180
23181	10IP	25	10	180
23183	15IP	25	10	180
23185	20IP	25	10	180
23191	30IP	25	10	180
23193	40IP	25	10	180



- **7019 ZOT TW** 人字起子頭
ZOT Torsion bit, Tri-Wing®, style C 6.3.

Order-No.	☉	↔	▬	
22603	0	25	10	330
22604	1	25	10	330
22605	2	25	10	330
22606	3	25	10	330
22607	4	25	10	330
22608	5	25	10	330



- **7019 ZOT TS** 萬字起子頭
ZOT Torsion bit, Torq-Set®, style C 6.3.

Order-No.	☉	↔	▬	
27030	0	25	10	330
27028	1	25	10	330
26045	3	25	10	330
25572	1/4	32	10	330
22591	4	25	10	330
22592	5	25	10	330
22593	6	25	10	330
22594	8	25	10	330
22595	10	25	10	330



- **7019 Z SP** 兩點起子頭
Standard bit, spanner, style C 6.3.

Order-No.	☉	↔	▬	
27064	4	25	10	180
27065	6	25	10	180
27066	8	25	10	180
27067	10	25	10	180



- **7018 Z** 方形起子頭 C6.3型
Standard bit, Robertson, style C 6.3.

Order-No.	☉	↔	▬	
06634	Robertson 1	2.3	25	5 140
06635	Robertson 2	2.8	25	5 140
06636	Robertson 3	3.3	25	5 140



- **7019 Z XZN** 多角起子頭
Standard bit, multi-tooth, style C 6.3.

Order-No.	☉	↔	▬	
26352	M3	25	10	180
26353	M4	25	10	180
26354	M5	25	10	180
26355	M6	25	10	180

- **7003 Z** 六角起子頭 · C4
Standard bit, hex, style C 4.

Order-No.	☉	↔	▬	
04737	0.7	28	10	200
04736	0.9	28	10	200
04735	1.3	28	10	200
04734	1.5	28	10	200
04733	2.0	28	10	200
04732	2.5	28	10	200
04730	4.0	28	10	200



- **7017 Z** 六角球頭起子頭
Standard bit, ball end hex, style C 6.3.

Order-No.	☉	↔	▬	
01734	1.5	38	10	270
01735	2.0	38	10	270
01736	2.5	38	10	270
01737	3.0	38	10	270
01738	4.0	38	10	270
01739	5.0	38	10	270
01740	6.0	38	10	270



- **7001 4 Z** 精密型起子頭4mm
Phillips drive 4 mm

Order-No.	☉	↔	▬	
40610	PH00	28	10	130

Wiha 專業起子頭 Professional-bit.



7040 Z 一字起子頭 · E6.3型
Professional bit, slotted, style E 6.3.

Order-No.	⌀	↔	⊖	⊖	
33961	2.5	70	0.4	5	250
01790	3.0	50	0.5	5	190
33962	3.0	70	0.5	5	250
01792	3.5	50	0.6	5	190
33963	3.5	70	0.6	5	250
01791	4.0	50	0.5	5	190
01794	4.0	50	0.8	5	190
33964	4.0	70	0.8	5	250
01793	4.5	50	0.6	5	190
01795	5.5	50	0.8	5	190
01796	5.5	50	1.0	5	190
33965	5.5	70	1.0	5	250
01798	6.5	50	1.2	5	190
33966	6.5	70	1.2	5	250
01799	8.0	50	1.2	5	240
01800	8.0	50	1.6	5	240

7041 Z 十字起子頭 · E6.3型
Professional bit, Phillips, style E 6.3.

Order-No.	⊕	↔	⊖	
31960	PH00	50	5	190
31961	PH00	70	5	300
31962	PH00	90	5	340
32105	PH0	50	5	140
35456	PH0	70	5	270
35457	PH0	90	5	300
33703	PH1	50	5	140
01803	PH1	70	5	240
04126	PH1	90	5	270
23213	PH1	110	5	310
22509	PH1	150	5	400
33704	PH2	50	5	140
01805	PH2	70	5	240
04009	PH2	90	5	270
05800	PH2	110	5	310
22510	PH2	150	5	400
33705	PH3	50	5	140
04010	PH3	70	5	240
04127	PH3	90	5	270
23215	PH3	110	5	310
22511	PH3	150	5	400

7047R Z 內六角防脫落球頭起子頭 E6.3型
Professional bit, hexagon ball end, style E 6.3.

Order-No.	⊙	↔	⊖	
25739	3.0	50	5	360
25740	4.0	50	5	360
25741	5.0	50	5	360
25742	6.0	50	5	360

7048 Z 方形起子頭
Professional bit, Robertson, style E 6.3.

Order-No.	⊙	⊙	↔	⊖	
06638	Robertson 2	2.8	50	5	250



7049XH 十字割溝起子頭 E6.3型
Professional bit, Xeno-slotted/Phillips, style E 6.3.
For terminal screws (slotted/ Phillips).

Order-No.	⊕	↔	⊖	
32490	SL/PH1	50	5	240
32491	SL/PH1	70	5	300
32686	SL/PH1	90	5	360
32492	SL/PH2	50	5	240
32493	SL/PH2	70	5	300
32687	SL/PH2	90	5	360



7049XZ 米字割溝起子頭 E6.3型
Professional bit, Xeno-slotted/Pozidriv, style E 6.3.
For terminal screws (slotted/ Pozidriv).

Order-No.	⊕	↔	⊖	
32494	SL/PZ1	50	5	240
32688	SL/PZ1	90	5	360
32496	SL/PZ2	50	5	240
32689	SL/PZ2	90	5	360

7042 Z 米字起子頭 E6.3型
Professional bit, Pozidriv, style E 6.3.

Order-No.	⊕	↔	⊖	
31958	PZ0	70	5	270
33706	PZ1	50	5	150
01808	PZ1	70	5	270
01809	PZ1	90	5	270
23221	PZ1	110	5	320
23227	PZ1	150	5	400
33707	PZ2	50	5	150
01811	PZ2	70	5	270
01812	PZ2	90	5	270
23228	PZ2	150	5	400
33708	PZ3	50	5	150
04176	PZ3	90	5	270
23223	PZ3	110	5	400
22512	PZ3	150	5	400

7043R Z 六角防脫落起子頭
Professional bit, hex, style E 6.3.

Order-No.	⊙	↔	⊖	
23145	3.0	50	5	290
23147	4.0	50	5	290
23149	5.0	50	5	290
23151	6.0	50	5	290

7044 套筒起子頭
Standard bit, socket-wrench insert, style E 6.3.

Order-No.	⊙	↔	⊖	
04514	5.0	55	5	350

Wiha 專業起子頭 Professional-bit.



7045 Z 星型起子頭 E6.3型 Professional bit, TORX®, style E 6.3.

Order-No.	☼	↔	▬	
32299	T5	50	5	200
32302	T6	50	5	200
33709	T6	70	5	290
33717	T6	90	5	350
32303	T7	50	5	200
33710	T7	70	5	290
33718	T7	90	5	400
32304	T8	50	5	200
33711	T8	70	5	290
33719	T8	90	5	400
32305	T9	50	5	200
33712	T9	70	5	290
33720	T9	90	5	400
32306	T10	50	5	200
33713	T10	70	5	290
33721	T10	90	5	400
33725	T10	110	5	450
33726	T10	150	5	520
32307	T15	50	5	200
33714	T15	70	5	290
33722	T15	90	5	400
33727	T15	110	5	420
33728	T15	150	5	520
32308	T20	50	5	200
33715	T20	70	5	290
33723	T20	90	5	400
33729	T20	110	5	420
33730	T20	150	5	520
32309	T25	50	5	200
33716	T25	70	5	290
33724	T25	90	5	400
33731	T25	110	5	420
33732	T25	150	5	520
33920	T27	50	5	200
33921	T27	70	5	290
33922	T27	90	5	350
33923	T30	50	5	200
33924	T30	70	5	290
33925	T30	90	5	350
33926	T30	110	5	420
33927	T30	150	5	520
33928	T40	50	5	220
33929	T40	70	5	290
33930	T40	90	5	350
33931	T40	110	5	450
33932	T40	150	5	550
38712	T10	70	NEW	5 500
38713	T15	70	NEW	5 500
38714	T20	70	NEW	5 500
38715	T25	70	NEW	5 500
38717	T30	70	NEW	5 500
36327	T8	150	NEW	5 540
38370	T6	150	NEW	5 540
38372	T9	150	NEW	5 540



7045BE 星型球頭起子頭 E6.3型 Professional bit, TORX® ball end, style E 6.3.

Order-No.	☼	↔	▬	
32409	T9	50	5	220
32423	T30	70	5	300

7045R 星型防脫落起子頭 E6.3型 Professional bit, TORX® with MagicSpring® style E 6.3.



Order-No.	☼	↔	▬	
34452	T10	50	5	280
34453	T15	50	5	280
34454	T20	50	5	280
34455	T25	50	5	280
34456	T30	50	5	280
34457	T40	50	5	280

7045 Z TR 星型中洞起子頭 E6.3型 Professional bit, TORX® H, style E 6.3.

Order-No.	☼	↔	▬	
21045	T7H	50	5	280
21047	T8H	50	5	280
20218	T9H	50	5	280
20219	T10H	50	5	280
24867	T15H	50	5	280
20220	T20H	50	5	280
20221	T25H	50	5	280
20222	T27H	50	5	280
20223	T30H	50	5	280
20224	T40H	50	5	280

• 星型中洞也適用於星型螺絲，但不可顛倒使用。

7043 Z 內六角起子頭 E6.3型 Professional bit, hexagon, style E 6.3

Order-No.	●	↔	▬	
05301	1.5	50	5	220
05302	2.0	50	5	220
34554	2.0	70	5	290
39178	2.0	90 NEW	5	360
05303	2.5	50	5	220
34555	2.5	70	5	290
39179	2.5	90 NEW	5	360
04194	3.0	50	5	220
34556	3.0	70	5	290
39180	3.0	90 NEW	5	360
04195	4.0	50	5	220
34557	4.0	70	5	290
39181	4.0	90 NEW	5	360
04196	5.0	50	5	220
34558	5.0	70	5	290
39182	5.0	90 NEW	5	360
04197	6.0	50	5	220
34559	6.0	70	5	290
39183	6.0	90 NEW	5	360
04198	8.0	50	5	350
34560	8.0	70	5	420

7046 Z 星型圓角起子頭 E6.3型 Professional bit, TORX PLUS®, style E 6.3.

Order-No.	☼	↔	▬	
39195	1IP	50 NEW	5	360
39196	2IP	50 NEW	5	360
32486	3IP	50 NEW	5	300
39197	4IP	50 NEW	5	300
28481	5IP	50	5	300
31973	6IP	90 NEW	5	520
26000	6IP	50	5	300
31975	8IP	90 NEW	5	520
23197	9IP	50	5	300
23203	20IP	50	5	300
23205	25IP	50	5	300
23211	40IP	50	5	300

Wiha 電動工具用起子頭接頭 Bit holder.



強大的Neodym 環形磁鐵，安全地吸附住重的螺絲。
但是，這並不是它只能做的一切。
如果螺絲頭清悉可見，環形磁鐵套，將自動彈回，
使用者可以直接鑽入，所需要的深度至環套。
並非所有的使用程序，都需要環形磁鐵的功能。
如果不需要環形磁鐵，可以手動推回，並停用這種方式。

- 特殊塗裝表面
- 合金金屬材質




7148 CF CentroFix 快脫式起子接頭，磁性
CentroFix Force quick release holder, magnetic, style E 6.3.

Order-No.	Ø	●	➡	⚡	
39133	1/4	1/4	60	10	1,100



7123 MagicFlip 萬用式起子接頭 (前端含磁鐵)
MagicFlip Force universal holder with ring magnet, style E 6.3.

Order-No.	Ø	●	➡	⚡	
36800	1/4	1/4	62	10	1,050



7148 CS CentroFix 超細型快脫式起子接頭，磁性
CentroFix SuperSlim quick release holder, magnetic, style E 6.3.

Order-No.	Ø	●	➡	⚡	
39134	1/4	1/4	66	10	850



7148ST CentroFix "不鏽鋼"快脫式起子接頭
CentroFix stainless steel quick release holder, style E 6.3. Blister packed.

Order-No.	Ø	●	➡	⚡	
33765	1/4	1/4	60	10	1,300



7113 S 磁性接桿58mm
Universal holder, magnetic, style E 6.3.

Order-No.	Ø	●	➡	⚡	
01895	1/4	1/4	58	10	220



7148C CentroFix快脫式兩分起子頭
CentroFix quick release holder, style E 6.3.

Order-No.	Ø	●	➡	⚡	
32477	1/4	1/4	60	10	1,000

7113 磁性白鐵接桿74mm
Universal holder, magnetic, style E 6.3.

Order-No.	Ø	●	➡	⚡	
01894	1/4	1/4	50	10	400



7110M C4起子頭快速接頭
Universal holder, magnetic, style E 6.3.

Order-No.	Ø	●	➡	⚡	
32505	C4	1/4	60	10	900



7143 磁性白鐵接桿
Universal holder, magnetic/ retaining ring, style E 6.3.

Order-No.	Ø	●	➡	⚡	
01913	1/4	1/4	72	10	440
36092	1/4	1/4	100	5	560
34306	1/4	1/4	150	5	564
36093	1/4	1/4	200	5	687



With Xeno bits

79187 T02 14件替換式起子頭組
Bit set for switch cabinet construction, 14 pcs.
Equipped with Phillips, Xeno-PH and TORX®.

Order-No.	Series	⚡		
33143	79187 T02	1	4,800	
	281-02	1xBit holder with handle, magnetic, 1/4"		
	7148CM	1xCentroFix quick release holder, magnetic, style E 6.3		
⊕	7049XH	1xSL/PH1	2xSL/PH2	
⊕	7041 Z	1xPH1	2xPH2	1xPH3
⊗	7045 Z	1xT10	1xT15	1xT20
		1xT25	1xT30	

Wiha 起子頭接桿手柄 Bit holder with handle.



- 384** 起子接桿 · 磁性 · 1/4"
Bit holder with handle, magnetic, 1/4".
德國鉻釩鋼 · 熱處理 · 特殊鍍鎳表面

Order-No.	Ø	↔	↔	↔	↔	
01475	1/4	125	225	36		10 950
01476	1/4	300	400	36		5 1,100



- 386** 可彎曲起子接桿 · 1/4"
Bit holder with handle, flexible shaft, 1/4".
可彎曲鐵製軟管

Order-No.	Ø	↔	↔	↔	↔	
01479	1/4	150	268	36		10 950



- 387** ClicFix 快速更換接頭起子, 磁性 1/4"
Bit holder with handle, quick release holder, 1/4".

Order-No.	Ø	↔	↔	↔	↔	
25874	1/4	35	146	30		10 1,080



- 281-02** 起子接桿, 磁性, 1/4"
Bit holder with handle, magnetic, 1/4".

Order-No.	Ø	↔	↔	↔	↔	
32160	1/4	125	36			1 800




- 7848** 鑽頭起子頭
Universal drill bit, style E 6.3.

Order-No.	Ø	↔	↔	↔	↔	
32292	4	85	45	1/4		10 500



- 388** T型起子接桿 · 磁性 · 1/4"
Bit holder with handle, magnetic, 1/4".

Order-No.	Ø	↔	↔	↔	↔	
01481	1/4	150	80			10 1,000



- 388DS** T型磁性兩分起子頭接桿
Bit holder with handle, magnetic, 1/4".

Order-No.	Ø	↔	↔	↔	↔	
26179	1/4	150	100			10 1,400



- 7210** 套筒轉接頭
Tool shaft, style C 6.3.

Order-No.	Ø	Ø	↔	↔	↔	
01933	1/4	1/4	25			5 450



- 7201** 起子頭轉接頭
Connecting device with retaining ring, style G 6.3 + G 10 + G 12.5.

Order-No.	Ø	Ø	↔	↔	↔	
01924	1/4	1/4	25	D 6.3		2 550
01926	1/4	3/8	30	D 6.3		2 850
01922	1/4	1/2	35	D 6.3		2 850
01927	5/16	3/8	30	D 8		2 850
01923	5/16	1/2	35	D 8		2 850



- 7240** 起子接桿
Tool shaft, style E 6.3.

Order-No.	Ø	Ø	↔	↔	↔	
04684	3/8	1/4	100			5 700
04362	3/8	1/4	50			5 620
08427	1/4	1/4	50			5 580

Wiha 收納起子組 Collector.



新設計的收納盒：
創新的開啟機制，
和大量的收納空間運用。

The Wiha FlipSelector:
simplest hand-ling
guaranteed.



- **7928-928** 27件安全起子套組
Bit Collector Security, mixed, 27 pcs.

Order-No.	Series					
09393	7928-928					5 4,000
	7015 Z TR	1xT8H	1xT10H	1xT15H	1xT20H	
		1xT25H	1xT27H	1xT30H	1xT40H	
	7019 ZOT TS	1x6	1x8	1x10		
	7019 ZOT TW	1x1	1x2	1x3	1x4	
	7019 Z SP	1x4	1x6	1x8	1x10	
	7013 Z TR	1xTR5/64	1xTR3/32	1xTR7/64		
		1xTR1/8	1xTR9/64	1xTR5/32		
	7113 S	Universal holder, magnetic, style E 6.3.				
	281-02	Bit holder with handle, magnetic, 1/4".				




- **7928-923** 61件起子套組
Bit Collector Standard, mixed, 61 pcs.

Order-No.	Series					
07943	7928-923					5 4,000
	7010 Z	1x4.5	1x5.5	1x6.5	1x8.0	
	7011 Z	7xPH1	13xPH2	3xPH3		
	7012 Z	7xPZ1	13xPZ2	3xPZ3		
	7015 Z	1xT10	1xT15	1xT20		
		1xT25	1xT30	1xT40		
	7013 Z	1x3.0	1x4.0	1x5.0	1x6.0	
	7149	ClicFix quick release holder, magnetic, style E 6.3.				



- **7928-913** 32件起子套組
Bit Collector Standard, mixed, 32 pcs.

Order-No.	Series				
34686	7928-913				5 3,600
	7010 Z	1x4.5	1x5.5	1x6.5	
	7011 Z	2xPH1	5xPH2	2xPH3	
	7012 Z	2xPZ1	5xPZ2	2xPZ3	
	7015 Z	1xT10	1xT15	1xT20	
		1xT25	1xT30	1xT40	
	7013 Z	1x4.0	1x5.0	1x6.0	
	7149	ClicFix quick release holder, magnetic, style E 6.3.			
	281-02	Bit holder with handle, magnetic, 1/4".			

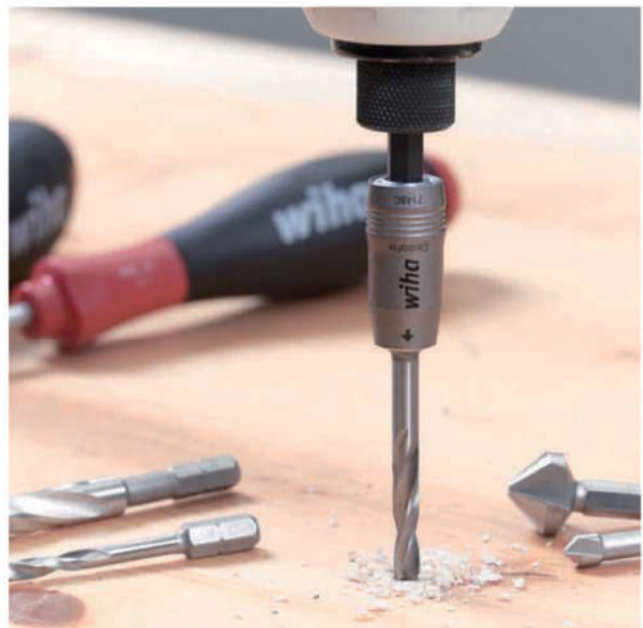

Wiha 收納起子組 Collector.



7944-902 9件六角起子頭組
XSelector Standard, hex, 9 pcs.

Order-No.	Series							
27157 2	7944-902						10 1,850	
●	7013 Z	1x1.5	1x2.0	1x2.5	1x3.0	1x4.0		
		1x5.0	1x6.0	1x8.0				
	7113 S	Universal holder, magnetic, style E 6.3						




7944-145 11件十字起子頭組
XSelector Torsion, Phillips, 11 pcs.

Order-No.	Series			
26979 1	7944-145			10 1,350
⊕	7011 ZOT	2xPH1	6xPH2	2xPH3
	7113 S	Universal holder, magnetic, style E 6.3		



SB7944-505TR 11件安全起子頭組
XSelector Standard, TORX® H, 11 pcs.
Blister packed for hanging.

Order-No.	Series						
27010 0	SB7944-505TR						10 2,100
⊕	7015 Z TR	1xT7H	1xT8H	1xT9H	1xT10H	1xT15H	
		1xT20H	1xT25H	1xT27H	1xT30H	1xT40H	
	7113 S	Universal holder, magnetic, style E 6.3					

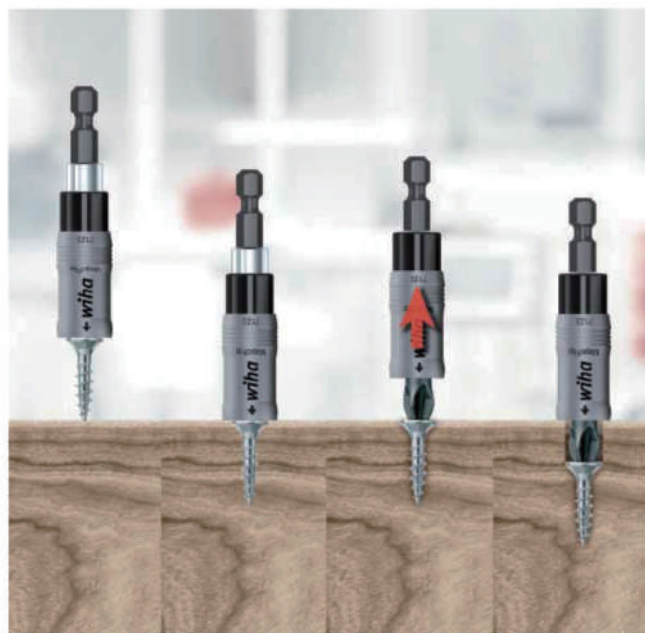

Wiha 鉗子系列 Pliers.



德國Wiha 品質的基礎

德國工藝高品質，不管是在剝皮或握持上，鉗子系列都已經滿足使用者的最高需求。

高品質原料，真實的測試與試用過程，選定德國合金鋼，在手柄上的製造過程，塑料應用的所有方面，皆依據最先進的品質管理程序。

特殊的熱處理，和高度的感應淬火零件，確保使用壽命長。

更精準嗎？沒錯！

著重於“功能”。德國Wiha 注重每一個環節的精確、相互作用和精準的切削刀口、夾持表面的處理。

人體工學

德國Wiha 鉗子，始終根據使用者的要求設計。加寬的把手設計，讓在剪軟與硬的手感，更感覺舒適。

不僅是新，還很有創意

- 德國Wiha 有完善技術和新一代的 Inomic® 伊諾密克鉗子。
- 加強切削加工性能，減少力量的輸出。
德國Wiha DynamicJoint 代表？優化的結合設計，和減少所需的使用力高達40%！
- MagicTips，高性能鋼鐵，創造一個穩定和安全的基本系列彈簧鉗。凹槽的特殊功能，以防止安全環跳脫。這是獨一無二的設計，並且非常的實用！

德國Wiha 品質控管制度

為確保所有鉗子，在離開我們工廠前，產品的品質，在控管上皆按照 ISO 9001:2008 的標準。生產過程中使用連續監測，和記錄組織程序控管。德國Wiha 產品，享有優秀的產品品質盛名。





切斷力量
2009年10月經過TUV-Süd集團測試·
可切斷硬線Ø1.6毫米[2,000牛頓/毫米²]
1200次

德國Wiha 的產品比較：

180mm 的老虎鉗
減少9.6公斤的切斷力量

180mm 的強力斜口鉗
減少12.8公斤的切斷力量



100% · 相當於80公斤的手部力量
10% · 相當於8公斤的手部力量



德國Wiha 在2011年得到“iF ”
設計大獎。
2011年，一個對品牌形象的焦點。
一致的品牌管理，表現出令人信服
的品質、設計和產品外觀。



reddot design award
winner 2007


德國Wiha Inomic®
伊諾密克鉗子：創新、功能、人體
工學和使用壽命水平，更是在當代
最大設計“reddot”和“iF ”中得
到肯定和證實。



2006年，德國Wiha 鉗子贏得
“Focus in Silver”優秀設計獎。
有說服力的人體工學重點，和表面
簡潔的設計線條，獲得青睞。




Wiha 經典鉗 Classic.



OptiGrip 三點夾持設計，
在工作上提供最理想的夾
持力。



德國Wiha DynamicJoint
結構設計，刀口40/60結合
，將力量更理想傳至刀口，
省力40%。



德國著名檢驗機構
TÜV-Süd測試結果：
德國Wiha DynamicJoint
結構設計，使刀口更耐用
更省力。



Z01001 經典鋼絲鉗
Classic combination pliers.

Order-No.	mm	II	Ø	mm	g	SB	mm
26706	180	7	3.4	2.2	205		5 800



Z02001 經典強力鋼絲鉗
Classic high-leverage combination pliers.

Order-No.	mm	II	Ø	mm	mm	g	SB	mm
26712	200	8	3.8	2.8	2.3	275		5 880
26715	225	9	4.2	3.0	2.5	330		5 880



Z16201 經典強力斜口鉗
Heavy-duty diagonal cutters Classic with DynamicJoint

Order-No.	mm	II	mm	Ømm	SB	mm
41301	160	6,5	17	2	x	5 1,050
41311	180	7	18	2,3	x	5 1,300
41321	200	8	19	2,5	x	5 1,400



Z05001 經典尖嘴鉗
Classic needle nose pliers with cutting edge.

Order-No.	mm	II	mm	Ømm	SB	mm
26718	160	6 ½	16	1.2		5 900
27341	200	8	17	1.6	x	5 1150



Z50101 經典電纜鉗
Classic cable cutter pliers.
適用於一般軟芯電纜線(銅、鋁)
不適用於硬芯電纜線(鋼、金屬、銅包鋼)

Order-No.	mm	II	Ø	mm²	g	SB	mm
34729	160	6 ½	16	50	150		5 1,400
34730	200	8	20	60	270		5 1,800



Z18001 經典替換式雙Power小鋼剪
BiCut Classic - switchable high-performance
diagonal cutters.

Order-No.	mm	II	Ø	mm	g	SB	mm
38060	200	8	3.5	3	310		5 1,800
38981	200	8	21	3	x		5 1,800



Z14101 經典 TriCut 電纜剝線鉗
Classic TriCut installation pliers.

Order-No.	mm	II	Ø	mm	g	SB	mm
38854	170	7	4	2.5	1.6	230	x 5 1,800



XXZ 36 0 01 經典迷你尖嘴鉗
Needle nose pliers Basic with spring.

Order-No.	mm		○	●	↺	↻	5	550
38430	160	6 ½	2	1.2	95			



XXZ 44 3 01 經典迷你斜口鉗
Diagonal cutters Basic with spring.

Order-No.	mm		○	●	↺	↻	5	550
38431	125	5	2	0,8	65			



可剝線1.2、1.6mm²

XXZ 14 1 01 經典迷你斜口鉗·剝線
Diagonal cutters Basic with stripping stations.

Order-No.	mm		○	●	↺	↻	5	550
38534	160	6 ½	4	2.5	1.6	170		



XXZ 15 0 01 經典塑膠鉗
Diagonal cutters for Plastic.

Order-No.	mm		○	●	↺	↻	5	550
38429	160	6 ½	4	2.5	1.6	170		



Z 17 0 01 經典強力平口鉗
Classic heavy-duty end cutting nippers.

Order-No.	mm		○	●	↺	↻	5	750
26757	160	6 ½	3.5	2.5	180			
26758	180	7	3.8	2.8	200			850
26759	200	8	4.0	3.0	220			1,080



Z 30 0 01 經典木工平口鉗
Classic pinners (grip, edge pliers).

Order-No.	mm		↺	↻	5	750
26771	180	7	265			
26772	200	8	350			800



Z 32 0 01 超強力虎頭鉗

Order-No.	mm		↺	Ømm	SB	5	1,200
40712	300	12	19	2.3			



Z 32 0 10 超強力虎頭鉗
without handle cover

Order-No.	mm		↺	Ømm	SB	5	1,500
40713	300	12	19	2.3			

符號對照表

符號	線的種類	範例	剪切強度(約N/mm ²)
○	軟質線	銅、鋁	220 - 250
●	中硬線	鐵、鐵釘	750 - 800
●	硬質線	彈簧線、鋼釘	1.600 - 1.800
●	鋼琴線	高強度彈簧線	2.200 - 2.300

線徑測試標準 DIN ISO 5744

水管鉗開口

○	對邊最大距離MM
○	管徑最大尺寸INCH

Wiha 經典鉗 Classic.



Z 33 4 01 經典卡環鉗(穴用)
Internal circlip pliers Basic (for boreholes).

Order-Nb.	Typ	mm	ii	☺	SB	☑	
34688	J 0	140	5 ½	8-13			5 850
36975	J 0	140	5 ½	8-13	x		5 850
34689	J 1	140	5 ½	12-25			5 850
36225	J 1	140	5 ½	12-25	x		5 850
34690	J 2•	180	7	19-60			5 900
36222	J 2•	180	7	19-60	x		5 900
34691	J 3•	220	9	40-100			5 1,000
36272	J 3•	220	9	40-100	x		5 1,000
34692	J 4•	305	12	85-140			5 1,850

• with safety latching function DIN ISO 5256.



Z 34 4 01 經典卡環鉗(軸用)
External circlip pliers Basic (for shafts).

Order-No.	yp	mm	ii	☺	SB	☑	
34698	A 0	140	5 ½	7-10			5 1,000
36977	A 0	140	5 ½	7-10	x		5 1,000
34699	A 1	140	5 ½	10-25			5 1,000
36978	A 1	140	5 ½	10-25	x		5 1,000
34700	A 2•	185	7	19-60			5 1,000
36220	A 2•	185	7	19-60	x		5 1,000
34701	A 3•	240	9	40-100			5 1,000
36219	A 3•	240	9	40-100	x		5 1,000
34702	A 4•	300	12	85-140			5 2,000



Z 33 5 01 經典卡環鉗(穴用)
Internal circlip pliers Basic (for boreholes).

Order-No.	Typ	mm	ii	☺	☑	☑	
34693	J 01	140	5	8-13	95		5 950
34694	J 11	140	5	12-25	95		5 950
34695	J 21•	180	7	19-60	155		5 950
36224	J 21•	180	7	19-60	155	x	5 950
34696	J 31•	220	9	40-100	245		5 1,100
34697	J 41•	305	12	85-140	410		5 2,000

• 特殊安全卡榫設計



Z 34 5 01 經典卡環鉗(軸用)
External circlip pliers Basic (for shafts).

Order-No.	Typ	mm	ii	☺	☑	☑	
34703	A 01	140	5	7-10	90		5 1,100
34704	A 11	140	5	10-25	90		5 1,100
34705	A 21•	185	7	19-60	155		5 1,100
34706	A 31•	240	9	40-100	260		5 1,200
34707	A 41•	300	12	85-140	455		5 2,200

• 特殊安全卡榫設計

Wiha 小知識

德國Wiha MagicTips 的特性介紹

- Maximum grip: 特殊安全卡榫設計，有效防止卡環跳出
- Hard as steel: 特殊熱處理，高耐磨性，持久性
- Surface refined: 特殊表面處理，抗鏽蝕
- Precise - 精密研磨球型軸承鋼



特別鎖定功能可防止，躍出的安全環



Wiha 經典鉗 Classic.



- Z 22 0 01** 經典水管鉗 · 快速型
Classic water pump pliers with push button adjustment.

Order-No.	mm	II	○	⊙	↔	SB	5
26764	180	7	1	30	150		1,400
26765	250	10	2	50	365		1,450
26767	300	12	2 ½	63	570		2,000
27384	300	12	2 ½	63	570		2,000



- Z 23 1 01** 經典水管鉗 · 自動型
QuickFix Classic water pump pliers, box type.

Order-No.	mm	II	○	⊙	↔	SB	5
39091	250	10	1 ½	40	360		1,700
39094	250	10	1 ½	40	x		1,700

Available from September 2014




- Z 21 0 01** 經典水管鉗 180mm
Classic water pump pliers, box type.

Order-No.	mm	II	○	⊙	↔	SB	5
26760	180	7	1	30	145		1,100



- Z 25 0 01** 多功能水管鉗(臂力鉗)
Classic water pump pliers, box type.

Order-No.	mm	II	⊙	5
40923	250	10	46	2,800



- Z 65 2 05** 經典兩用打孔鉗
Professional revolving punch and loop pliers.

Order-No.	mm	II	∅	↔	5
29550	225	9	4,0-5,0	325	1,400



- Z 65 0 05** 經典打孔鉗
Professional revolving punch pliers.

Order-No.	mm	II	∅	↔	5
28402	225	9	2,0-4,5	325	1,100



- Z 60 0 01** 經典端子鉗
Classic crimping pliers.

Order-No.	mm	II	mm ²	↔	5
28330	145	5 ¾	0,25-2,5	130	1,400
30066	180	7	0,25-16	250	1,900




- Z 27 0 01** 經典破壞鉗
Bolt cutter Classic

Order-No.	mm	II	mm ²	↔	5
39376	145	5 ¾	0,25-2,5	130	4,000


Wiha 專業鉗 Professional.



切斷力量
2009年10月經過TÜV-Süd集團測試



DynamicJoint
設計省力高達40%
對於專業大量裁剪，
是最能感覺出來的。



堅硬舒適的彈性部
分，確保手指運動
範圍低摩擦力



鍍鉻，防腐蝕持久耐用

柔軟的防滑彈性材質，
鉗子柄寬大，操作舒適
手握安全



Z 01 0 05 專業鋼絲鉗
Combination pliers Industrial.

Order-No.	mm	II	○	●	●	g	SB	5	1,100
26707	180	7	3.4	2.2	1.8	245			
27399	180	7	3.4	2.2	1.8	245	x		



Z 18 0 05 替換式雙Power 專業小鋼剪
BiCut Professional - switchable high-performance diagonal cutters.

Order-No.	mm	II	○	●	g	SB	5	2,000
38189	200	8	3.5	3	350			



Z 02 0 05 專業強力鋼絲鉗
High-leverage combination pliers Industrial.

Order-No.	mm	II	○	●	●	g	SB	5	1,500
26713	200	8	3.8	2.8	2.3	315			
27401	200	8	3.8	2.8	2.3	315	x		
26716	225	9	4.4	3.0	2.5	390			
27402	225	9	4.4	3.0	2.5	390	x		



Z 16 0 02 專業強力斜口鉗
Heavy-duty diagonal cutters Industrial.

Order-No.	mm	II	○	●	●	g	SB	5	1,600
26747	160	6 ½	3.5	2.5	2.0	190			
32339	180	7	3.8	2.7	2.3	260			
32341	200	8	4.2	3.0	2.5	315			



Z 02 0 02 專業雙色高效能鋼絲鉗
with extra long cutting edge

Order-No.	mm	II	✂	Ømm	SB	5	1,500
32319	200	8	18	2.3			
32320	225	9	19	2.5			
34567	225	9	19	2.5	x		



Z 05 1 05 專業40°彎頭尖嘴鉗
Needle nose pliers Industrial with cutting edge.

Order-No.	mm	II	○	●	●	g	SB	5	1,350
26724	160	6 ½	2.5	1.8	1.2	155			
26726	200	8	3.2	2.2	1.6	200			



Z 05 0 05 專業尖嘴鉗
Needle nose pliers Industrial with cutting edge.

Order-No.	mm	II	○	●	●	g	SB	5	1,000
26719	160	6 ½	2.5	1.8	1.2	155			
27403	160	6 ½	2.5	1.8	1.2	155	x		
26722	200	8	3.2	2.2	1.6	200			

Wiha 專業鉗 Professional.



Z 09 0 02 專業雙色圓嘴鉗

Order-No.	mm	II	SB		
32332	160	6 ½		5	1,200



Z 07 0 02 專業雙色平嘴鉗

with cutting edge curved shape, approx. 40°

Order-No.	mm	II	SB		
32330	160	6 ½		5	1,200



Z 05 1 05 專業雙色彎口尖嘴鉗

with cutting edge curved shape, approx. 40°

Order-No.	mm	II	SB	Ømm		
32324	160	6 ½		16	1.2	1,350
32328	200	8		17	1.6	1,700



Z 05 0 02 專業雙色尖嘴鉗

with cutting edge straight shape

Order-No.	mm	II	SB	Ømm		
32322	160	6 ½		16	1.2	1,100
32323	200	8		17	1.6	1,450



Z 12 0 02 專業雙色斜口鉗

with cutting edge straight shape.

Order-No.	mm	II	SB	Ømm		
30975	140	5 ½		16	1.4	1,200
30827	160	6 ½		16	1.6	1,400
30976	180	7		17	1.8	1,500



Z 22 0 05 專業快速水管鉗

Water pump pliers Professional with push button setting.

Order-No.	mm	II	SB	g		
26766	250	10	2	50	400	2,100



Z 22 0 02 專業快速型水管鉗

Water pump pliers Industrial with push button adjustment.

Order-No.	mm	II	SB	g		
32352	250	10	2	50	400	1,900

符號對照表

符號	線的種類	範例	剪切強度(約N/mm ²)
○	軟質線	銅、鋁	220 - 250
○	中硬線	鐵、鐵釘	750 - 800
○	硬質線	彈簧線、鋼釘	1.600 - 1.800
●	鋼琴線	高強度彈簧線	2.200 - 2.300

線徑測試標準 DIN ISO 5744

Wiha Info



Wiha BiCut - Double the power at the press of a button

- **Clever:** BiCut does the job of two pairs of pliers.
- **Power:** Cutting force doubled for extremely hard materials.
- **Powerful:** Up to 50% less hand strength required for cutting.

Wiha Info



Wiha DynamicJoint - A new dimension in strength and durability

- **Innovative:** Optimised joint construction
- **Effective:** Low loss of force means less force needed for cutting
- **Permanent:** Optimal performance even after thousands of cuts



德國著名檢驗機構
TÜV-Süd測試結果:
德國Wiha DynamicJoint
結構設計, 使刀口更耐用
更省力。



• 德國Wiha
DynamicJoint 結構
設計刀口40/60結合
將力量更理想傳至刀
口, 省力40%。



Focus Energy
Silber 2006



堅硬舒適的彈性部
分, 確保手指運動
範圍低摩擦力

柔軟的防滑彈性材質,
鉗子柄寬大, 操作舒適
手握安全

鍍鉻, 防腐蝕
持久耐用

手柄鉗部份設計協調
適宜手指用力時持握



Z 01 0 06 專業絕緣鋼絲鉗

Combination pliers Professional electric.
Individually tested protective insulation
1,000 V AC, VDE and GS tested.

Order-No.	mm	II	○	●	↔	SB	
26708	180	7	3.4	2.2	245		5 1,400
27418	180	7	3.4	2.2	1.8	245	x 5 1,400



Z 05 0 06 專業絕緣尖嘴鉗

Needle nose pliers Professional electric with
cutting edge.
Individually tested protective insulation 1,000 V AC,
VDE and GS tested.

Order-No.	mm	II	○	●	↔	SB	
26720	160	6 ½	16	1.2			5 1,400
27422	160	6 ½	16	1.2	x		5 1,400
26727	200	8	17	1.6			5 1,700
27423	200	8	17	1.6	x		5 1,700



Z 02 0 06 專業絕緣鋼絲鉗

Order-No.	mm	II	↔	Ømm	SB		
27421	225	9	19	2.5	x		5 1,800



Z 50 1 06 專業絕緣電纜鉗

Cable cutters Professional electric.
Individually tested protective insulation 1,000 V AC,
VDE and GS tested.

Order-No.	mm	II	Ø	mm ²	↔	SB	
34744	200	8	20	60	305		5 2,500



Z 55 0 06 專業絕緣剝皮鉗

Stripping pliers Professional electric.
Individually tested protective insulation 1,000 V AC,
VDE and GS tested.

Order-No.	mm	II	↔			
26847	160	6 ½	155			5 1,650



Z 14 1 06 專業絕緣剝皮鉗 TriCut

Order-No.	mm	II	↔	Ømm	SB		
38853	170	7	13	1.6	x		5 2,300



Z 14 0 06 專業絕緣斜口鉗, 剝線

Electrician's diagonal cutters Professional electric.
Individually tested protective insulation 1,000 V AC,
VDE and GS tested.

Order-No.	mm	II	○	●	↔	SB	
26745	160	6 ½	4.0	2.0	200		5 2,200



可剝線1.5、2.5mm²

Wiha 專業絕緣鉗 Professional electric.



1000 V
IEC 60900:2004

Z 16 0 06 專業絕緣強力斜口鉗

Heavy duty diagonal cutters Professional electric. Individually tested protective insulation 1,000 V AC, VDE and GS tested.

Order-No.	mm	II	Ø	g	SB		
26751	180	7	3.8	2.7	2.3	260	5 2,100



Z 16 3 06 專業絕緣強力型斜口鉗 with opening spring

Order-No.	mm	II	Ømm	SB		
41309	160	6,5	17	2	x	5 2,000
41329	200	8	19	2,5	x	5 2,400



246 22 02 電工刀 Cable stripper.

Order-No.	mm	II	Ømm	g	SB	
35538	165	6½	4.0-28	80	x	1 1,100



1000 V
IEC 60900:2012

246 78 SB 電工刀 Stripping knife for round cables. Blister packed.

Order-No.	mm	II	g	SB	
36053	200	8	120	x	1 2,000



246 75 SB 自動剝線鉗 up to 6 mm² in blister pack

Order-No.	mm	II	mm²	AWG	SB	
36050	190	7 ½	0,2-6,0	24-10	x	1 1,400



Z 57 0 06 SB 自動剝線鉗 Automatic stripping tool up to 16 mm² in blister pack

Order-No.	mm	II	mm²	AWG	SB	
42062	200	8	0,03 - 16	32-5	x	1 7,500



246 72 SB 自動調整剝線鉗 直立式切口

設計: 可替換式剝線卡夾
剝線範圍 0.02-10mm² / 34-8AWG

應用: 適用於導管線, 軟式電纜, 設備電線, 扁平電纜線...

Order-No.	mm	II	Ømm	AWG	SB	
33847	190	7½	0.02 - 10	34 - 8	135	1 5,500

246 73 SB 替換式剝線卡夾 直立式切口

Order-No.	Ømm	AWG	SB	
33846	0.02 - 10	34 - 8	7	1 1,500



246 76 SB 剝皮刀 for coaxial cable, in blister pack

Order-No.	mm	II	mm²	SB	
36051	110	4¼	4,8-7,5	x	1 920



246 77 SB 剝皮刀 for round cable, in blister pack

Order-No.	mm	II	mm²	SB	
36052	125	5	8-13	x	1 920



Wiha 壓接工具與剝線鉗 Crimp tools and stripping pliers.



Z 62 0 005 06 SB 歐式端子壓接工具
for wire-end sleeves hex crimping

Order-No.	mm	mm ²	AWG		
41246	210	0,08-16	28-5	1	8,800



Z 62 0 003 06 開放型端子壓接工具
Crimping tools for non-isolated contact pins.

Order-No.	mm	mm ²	AWG		
33842 8	220	0.25-6	22-10	510	7,000



Z 62 0 001 06 歐式端子壓接工具
梯形壓孔, 徑向壓接

壓接尺寸: 壓接孔1. 0.14-0.75mm² / 26-18AWG
壓接孔2. 1.0-1.5mm² / 18-16AWG
壓接孔3. 2.5mm² / 14AWG
壓接孔4. 4.0mm² / 12AWG
壓接孔5. 6.0mm² / 10AWG
壓接孔6. 10.0mm² / 8AWG

Delockable力鎖裝置, 確保端子壓接完整
人體工學設計手柄, 提升工作的舒適度.

材質: 德國高強度鋼, 特殊熱處理
應用: 適用於歐式端子

Order No.	mm	Ømm	AWG		
33844	220	0.14-10	26-8	510	7,000



Z 62 0 004 06 R型(圓形)端子壓接工具
W形壓孔, 徑向壓接

壓接尺寸: 壓接孔1: 0.1-0.5mm² / 26-20AWG
壓接孔2: 0.5-2.5mm² / 20-14AWG
壓接孔3: 4.0-6.0mm² / 12-10AWG
壓接孔4: 10.0-16.0mm² / 8-6AWG

Delockable力鎖裝置, 確保端子壓接完整
人體工學設計手柄, 提升工作的舒適度

材質: 德國高強度鋼, 特殊熱處理
應用: 適用於R型(圓形)非絕緣端子

Y型非絕緣端子, 針型非絕緣端子, 非絕緣銅管

Order-No.	mm	Ømm	AWG		
33843	220	0.1-16	26-6	510	7,000



Z 62 0 002 06 Y型易進式絕緣端子壓接工具
橢圓形壓孔, 徑向壓接

電線與絕緣端子一次壓接完成

壓接尺寸: 紅色壓接孔: 0.5-1.0mm² / 20-16AWG
藍色壓接孔: 1.5-2.5mm² / 16-14AWG
黃色壓接孔: 4.0-6.0mm² / 12-10AWG

Delockable力鎖裝置, 確保端子壓接完整
人體工學設計手柄, 提升工作的舒適度
德國高強度鋼, 特殊熱處理

材質: 適用於紅色、藍色、黃色Y型易進式絕緣端子
針型絕緣端子, 針型公插絕緣端子,
平板易進式絕緣端子,

應用: 子彈型絕緣端子, 絕緣管

Order-No.	mm	Ømm	AWG		
33841	220	0.5-6	20-10	510	6,500



Wiha 專業鉗 Professional.



使用德國Wiha 電子尖端鉗夾持小元件和扳彎電線。

■ C70特殊鋼

硬盤·舒適的橡膠
確保在手指運動中低摩擦


手柄採用柔軟防滯的
橡膠材質·握起來更
加舒適

不亮光的
青銅表面

精密刀刃


堅固耐用·符合人體工學
的手柄·精心固定著鉗子

手柄前端符合人體工學·
讓手指保持在最舒適的位置



· **Z 41 3 03** Electric 電子斜口鉗
Diagonal cutters Electronic.

Order-No.	mm		○	●	g	SB	x	
27393	138	5 ½	2.0	0.8	80	x	5	1,550




Z 49 2 03 專業電子剝線鉗

Order-No.	mm		Ø mm	AWG	g	SB	x	
36794	180	7	0.8-2.6	20-10	70	x	5	1,350



Z 41 6 03 電子斜口鉗·防彈跳功能
Diagonal cutters Electronic with
wire trapping spring.

Order-No.	mm		○	g	SB	x	
26825	138	5 ½	1.3	80		5	1,150



Z 49 7 03 電子剝線鉗
Electronic stripping pliers.

剝線尺寸: 0.4 / 0.5 / 0.6 / 0.8 / 1.0 / 1.3mm²
AGW 26 / 24 / 22 / 20 / 18 / 16.

Order-No.	mm		Ø mm	AWG	g	SB	x	
35820	180	7	0.4-1.3	26-16	70	x	5	1,350
33472	180	7	0.4-1.3	26-16			5	1,350

Wiha 小知識

專業切削刀刃的電子鉗·特別設計用於切割軟中硬線。

- 鉗子能平齊切斷電線·但只適用於軟銅電線 (99.85%純銅)。
- 鉗子半嵌入式·和正常斜面的切割邊緣功能·可以切細的鐵絲·甚至是中等硬鋼線。

符號對照表

符號	線的種類	範例	剪切強度(約N/mm ²)
○	軟質線	銅·鋁	
◐	中硬線	鐵·鐵釘	
●	硬質線	彈簧線·鋼釘	
●	鋼琴線	高強度彈簧線	

Wiha 專業絕緣鉗 Professional electric.

安全注意事項：
當工作使用剪鉗時
提防被剪斷的線亂飛。
請戴安全眼鏡。



鉗子頭部用優質的滾珠軸承
鋼製造;硬度達60HRC
金屬表面鍍鎳
連接軸部位
最佳防腐蝕保護



鎖定開關:
鉗子使用與關閉在此處開關

手柄上拇指周圍用力
此處有柔軟握把
符合人體工學

鉗子臂的移動和
互壓部位為硬塑料
較不易磨損

AC 1000V 當使用VDE絕緣工具工作 ·
IEC 60900:2004 需遵守國家的安全和事故預防條例



1000 V
IEC 60900:2004


Z 129 16 伊諾密克絕緣斜口鉗
Diagonal cutters Inomic® VDE.
Insulation up to 1000 V AC, GS-mark.

Order-No.	Typ	○	○	○	⚡	
30666	160	3.5	2.5	1.6	145	5 2,222


符號對照表

符號	線的種類	範例	剪切強度(約N/mm ²)
○	軟質線	銅、鋁	220 - 250
○	中硬線	鐵、鐵釘	750 - 800
●	硬質線	彈簧線、鋼釘	1.600-1.800
●	鋼琴線	高強度彈簧線	2.200-2.300

線徑測試標準 DIN ISO 5744

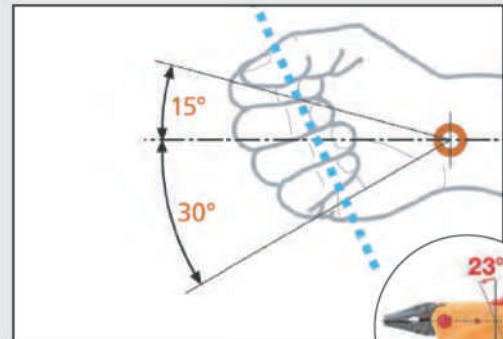

23°人體工學設計 · 降低工作疲勞感



- +25%力量使拇指可舒適握把的施力柄
- 專利23°傾斜完美符合人體工學施力柄
- 鉗子頭功能為全新革命技術製造
- 新混合技術加零晃動結合
- 好控制靈敏度高的舒適彈簧裝置



Wiha 抗靜電鉗 Professional ESD.



德國Wiha 專業抗靜電斜口鉗，頭部分為尖頭，可切齊剪斷軟電線。



德國Wiha 專業抗靜電尖嘴鉗，專門用來夾持和彎曲等精密操作。

硬盤
舒適的橡膠區
確保在使用中達到低摩擦

複合成分抗靜電鉗子柄
設計符合人體工學，
適合於防靜電作業

雙彈簧
用於敏感作業

表面拋光處理

精密且耐用的
雙重連接

柔軟的防滑橡膠
握起來更加舒適



德國Wiha ESD 抗靜電螺絲起子
手柄形狀完美，表面的電阻
在 10^6-10^9 歐姆，確保靜電
能安全地釋放。



• **Z 41 3 04** ESD抗靜電斜口鉗
Diagonal cutter Professional ESD.

Order-No.	mm		○	g	SB	
26821	115	4 ½	1.0	60		5 2,400



• **Z 36 0 04** ESD抗靜電尖嘴鉗
Needle nose pliers Professional ESD.

Order-No.	mm		A	B	D	F		
26799	120	4 ¾	9.5	23	6.5	1.4	60	5 2,000
27905	145	5 ¾	12.0	40	7.5	2.0	93	5 2,200





• **Z 41 4 04** 專業抗靜電斜口鉗
Diagonal cutters Professional ESD with wire trapping spring.

Order-No.	mm		○	g	SB	
26822	115	4 ½	1.2	60		5 2,500




• **Z 40 3 04** 專業抗靜電斜口鉗
narrow, pointed head without bevelled edge

Order-No.	mm		✂	Ømm	
33521	115	4 ½	2	1	5 2,500

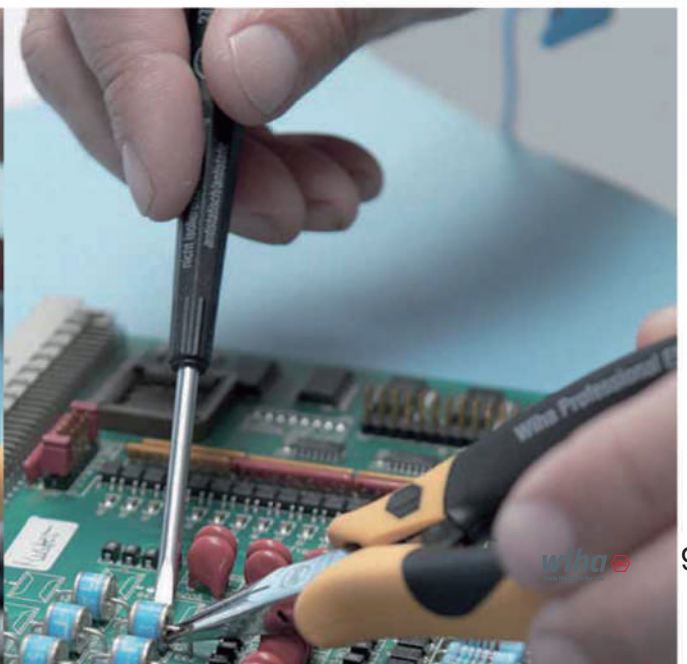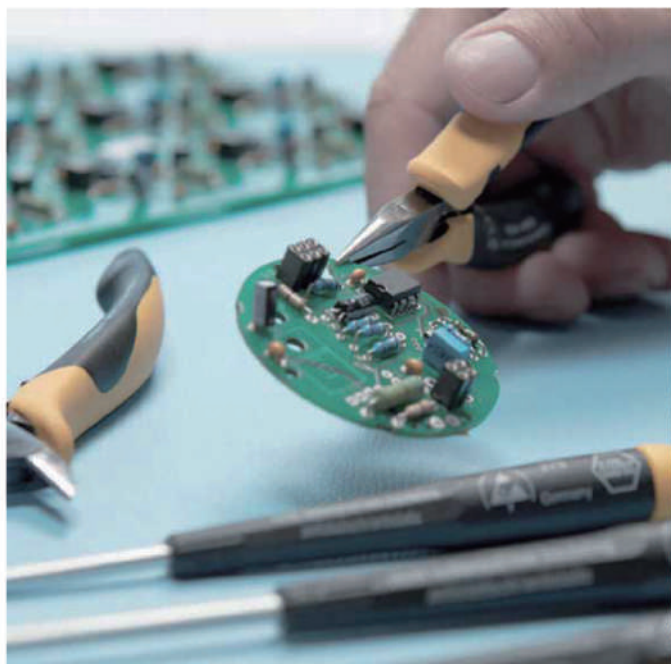

Wiha 專業ESD抗靜電鑷子 Professional ESD.

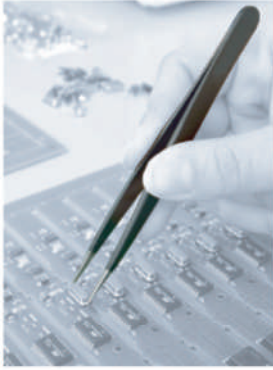


鑷子前端精準
即便是棘手的工作
專業的防靜電精密鑷子
都可以毫不費力的處理
例如針對半導體零件。

■ 鉻鎳合金不鏽鋼



防靜電塗層

抗磁功能
高規格精密和安全性



ZP 01 0 14 ESD抗靜電專業精密鑷子
Universal tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32318	130	AA	19	10	750



ZP 07 1 14 ESD抗靜電專業精密鑷子
Precision tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32325	130	PSF	18	10	950



ZP 46 0 14 ESD抗靜電專業精密鑷子(寬4mm)
Universal tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32343	145	40	29	10	1,000



ZP 09 0 14 ESD抗靜電專業精密鑷子
Precision tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32326	135	SS	13	10	1,100



ZP 06 0 14 ESD抗靜電專業精密鑷子
Precision tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32347	130	GG	19	10	1,050



ZP 20 1 14 ESD抗靜電專業精密鑷子
Precision tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32335	120	7a	15	10	1,200



ZP 25 3 14 ESD抗靜電專業30°精密鑷子
SMD tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32337	120	8b	16	10	1,400



ZP 25 2 14 ESD抗靜電專業精密鑷子
SMD tweezers Professional ESD.

Order-No.	mm	Typ	mm	mm	
32340	120	13	16	10	1,400

Wiha 專業ESD抗靜電鑷子 Professional ESD.



ZP 11 0 14 專業型抗靜電鑷子 精密尖/00型
Precision tweezers Professional ESD.

Order-No.	mm	Typ	g		
32327	120	00	21	10	1,400



ZP 24 0 14 ESD抗靜電專業45°精密鑷子
SMD tweezers Professional ESD.

Order-No.	mm	Typ	g		
32338	120	12	15	10	1,400



ZP 18 0 14 專業型抗靜電鑷子 精密尖/5型
Precision tweezers Professional ESD.

Order-No.	mm	Typ	g		
32334	110	5	13	10	1,200




ZP 15 0 14 ESD專業型抗靜電鑷子 精密扁/2a型
Precision tweezers Professional ESD.

Order-No.	mm	Typ	g		
32329	120	2a	16	10	1,050



ZP 16 0 14 專業型抗靜電鑷子 精密尖/3c型
Precision tweezers Professional ESD.

Order-No.	mm	Typ	g		
32346	110	3c	14	10	1,050

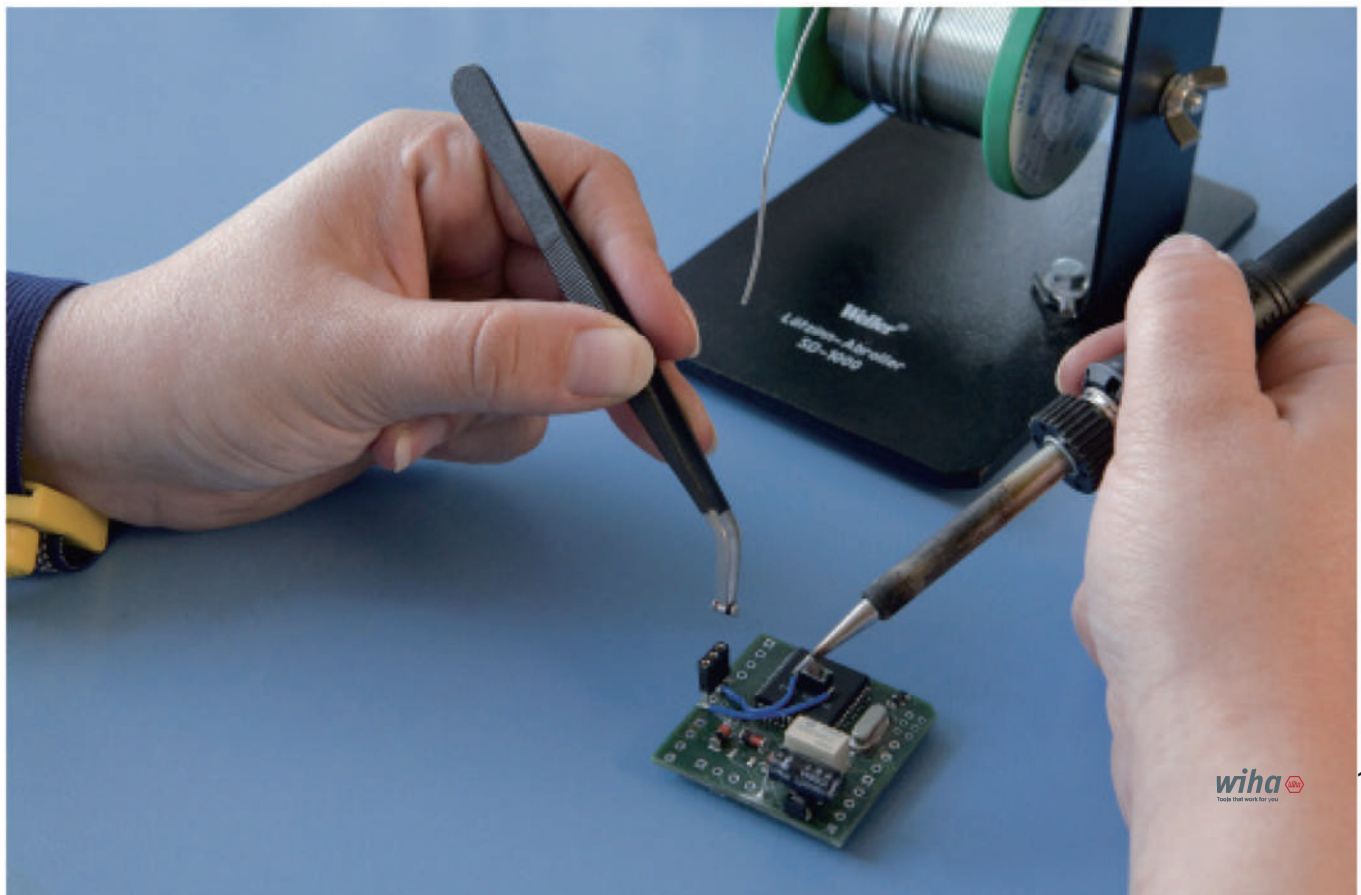

Wiha 安全軟面鎚 Safety soft-face hammer.



德國Wiha 黑白軟面鎚，適用在中硬或中軟表面，是園藝和景觀美化的最佳工具。



粉末塗層的安全殼，用鍛鑄製成，將鎚頭和鎚柄牢牢連結。840mm長的大鎚，是特殊應用的理想長度，例如鐵路軌道建設。



安全原理：
通過一個螺母和螺柱這一個巧妙的設計，使所有部件連接在一起



832-15 專業香檳鎚，藍 / 黃
Safety soft-face hammer, blue/ yellow.
藍：軟性，抗褪色，抗磨損，彈性體(elastomer)
黃：中硬，抗褪色，抗磨損，PU塑膠(polyurethane)

Order-No.	●	↺	⚡	⚡	⚡	⚡
26653	30	300	87	290	5	1,300
26654	40	640	110	325	5	1,800
26655	50	1100	131	360	5	2,500
26656	60	1700	150	400	5	3,300



832-38 專業香檳鎚，黑 / 橘
Safety soft-face hammer, black/ transparent orange.
黑：中軟，抗褪色，抗磨損，橡膠(rubber)
橘：硬，抗褪色，抗磨損，醋酸纖維(cellulose acetate)

Order-No.	●	↺	⚡	⚡	⚡	⚡
26611	30	300	87	290	5	1,200
26612	40	640	110	325	5	1,600
26613	50	1100	131	360	2	2,200
26614	60	1700	150	400	2	3,000



834-15 專業香檳鎚，藍 / 黃，四方形鎚面
Safety soft-face hammer, blue/ yellow, square face.
藍：軟性，抗褪色，抗磨損，彈性體(elastomer)
黃：中硬，抗褪色，抗磨損，PU塑膠(polyurethane)

Order-No.	■	↺	⚡	⚡	⚡	⚡
26662	40	650	110	325	5	1,900



832-39 安全軟面鎚，黑 / 白
With hickory wooden handle, round hammer face

Order-No.	●	↺	⚡	⚡	⚡	⚡
26657	30	314	87	290	5	1,400
26661	80L	3324	185	840	2	6,500

Wiha 小知識

簡易顏色編碼系統
不同顏色代表不同材質

用途	材質	硬度
適用於玻璃安裝、輕金屬建築、家具及室內裝潢業、輕型組裝、展覽裝潢。	彈性體	軟 ● ●
適用於瓷磚鋪設、石塊路面、人行道邊石設置、房屋建築、輕園藝及景觀設置。	橡膠	中軟 ●
適用於工具和機器製造、金屬工作、汽車修理、鍍金。	聚氨酯	中等硬 ● ●
適用於組裝和拆卸、鍍金工作、建設和施工、模具與CNC車間。	醋酸纖維素	硬 ●
適用於大樓及建造業、鑄造、模具製造、道路工程、林業和農業、園藝及景觀。	聚酰胺	非常硬 ○

○ = 圓形面
□ = 方形面



832 B8 專業香檳鎚8件組
Safety hammer set, 8 pcs.
香檳鎚40+6個樣式鎚面，鐵盒收納
832-38專業香檳鎚，黑 / 橘
831-1藍：軟性，彈性體(elastomer)
831-3黑：中軟，橡膠(rubber)
831-5黃：中硬，PU塑膠(polyurethane)
831-9白：特硬，尼龍(nylon)
833-1藍：軟性方形，彈性體(elastomer)
833-5黃：中硬方形，PU塑膠(polyurethane)
352六角扳手6mm

Order-No.	Series	↺	⚡	⚡
28050	832 B8	640	1	4,200

831-1 錘面 · 藍色 · 適用於香檳錘
Hammer face, blue, for Safety soft-face hammer.

Order-No.	●	!	↕	↔	⊞	
26663	30		17			5 250
26664	40		39			5 360
26665	50		85			2 480
26666	60		135			2 700



831-9 錘面 · 白色 · 適用於香檳錘
Hammer face, white, for Safety soft-face hammer.

Order-No.	●	!	↕	↔	⊞	
26510	30		24			5 350
26511	40		56			5 500
26512	50		110			2 880
26513	60		187			2 1200



831-3 錘面 · 黑色 · 適用於香檳錘
Hammer face, black for Safety soft-face hammer.

Order-No.	●	!	↕	↔	⊞	
26422	30		27			5 220
26423	40		62			5 280
26424	50		111			2 390
26425	60		192			2 550
26426	80		410	also for sledge hammers		2 950



831-5 安全替換錘面 · 黃色
Hammer face, yellow, for Safety soft-face hammer.

Order-No.	●	!	↕	↔	⊞	
26427	30		27			5 270
26428	40		57			5 420
26429	50		116			2 370
26430	60		190			2 850



831-8 錘面 · 橘色 · 適用於香檳錘
Hammer face, transparent orange, for Safety soft-face hammer.

Order-No.	●	!	↕	↔	⊞	
26615	30		27			5 220
26616	40		57			5 400
26618	50		118			2 600
26620	60		195			2 860



833-5 安全替換錘面 · 黃色
Square hammer face, yellow for Safety soft-face hammer.

Order-No.	■	!	↕	↔	⊞	
26438	40		65			5 470



833-1 安全替換錘面 · 藍色
Square hammer face, blue, for Safety soft-face hammer.

Order-No.	■	!	↕	↔	⊞	
26673	40		47			5 420



Wiha 無反彈錘 Dead-blow hammer.



800 專業橡膠槌
Dead-blow hammer with hickory handle.

Order-No.	●	!	↕	↔	⊞	
02092	25		320	108	320	5 1,750
02093	30		460	115	350	5 1,850
02094	35		580	118	355	5 2,000
02095	40		760	125	375	5 2,300
02096	45		1000	130	380	2 2,600
02097	50		1250	135	385	2 3,000
02098	60		2000	165	420	2 5,000
02099	70		2600	165	430	2 6,500

■ PU塑膠(Polyurethane)
■ 粉體烤漆鋼管



8001 無反彈錘
Dead-blow hammer with hickory handle.

Order-No.	●	!	↕	↔	⊞	
39008	30		460	115	350	5 2,000



8021 無中力反彈錘
Dead-blow hammer with steel tube shaft.

Order-No.	●	!	↕	↔	⊞	
39021	50		1400	135	365	2 4,000



SB 534S5 木釘敲擊起子(火箭人)
Phillips with 6 mm round blade in blister pack, 5-pcs.

Order-No.	Series	⊞	
41289	SB 534S5		1 1,400
	534	1xPH2 2x30 2x40	



Wiha 混合組套系列 Mechanic's application sets.



Screwdrivers



reddot design award winner 2007



Pliers



L-keys



Focus Open Silver 2011



reddot design award winner 2010



Wiha 絕緣扳手系列 VDE application sets.



5590N 絕緣15°開口扳手
Insulated single-sided open-end spanner.
Individually tested protective insulation 1,000 V AC,
VDE and GS tested. 德國鉻釩鋼

Order-No.	Series			
36543	5590NT15	SW6	1	1,400
36686	5590NT15	SW8	1	1,800
36586	5590NT15	SW8	1	1,400
36639	5590NT15	SW9	1	1,400
36640	5590NT15	SW10	1	1,500
36641	5590NT15	SW11	1	1,500
36542	5590NT15	SW12	1	1,500
36643	5590NT15	SW13	1	1,700
36644	5590NT15	SW14	1	1,800
36645	5590NT15	SW15	1	1,900
36646	5590NT15	SW16	1	1,900
36647	5590NT15	SW17	1	2,000
36648	5590NT15	SW19	1	2,100
36649	5590NT15	SW22	1	2,300
36650	5590NT15	SW24	1	2,500



5589N 絕緣棘輪扳手
Insulated Ratchet ring spanner.
Protective insulation 1000 V AC. 德國鉻釩鋼

Order-No.	Series			
36666	5589NT7	SW8	1	2,500
36667	5589NT7	SW10	1	2,500
36668	5589NT7	SW12	1	2,600
36669	5589NT7	SW13	1	2,600
36670	5589NT7	SW14	1	2,600
36671	5589NT7	SW17	1	2,800
36672	5589NT7	SW19	1	3,000



5590N T15 絕緣15°開口扳手15件組
Insulated single-sided open-end spanner set,
15 pcs. Individually tested protective insulation
1,000 V AC, VDE and GS tested. 德國鉻釩鋼

Order-No.	Series					
33179	5590N T15					1 24,000
	5590N	6	7	8	9	10
		11	12	13	14	15
		16	17	19	22	24



5590N T8 絕緣15°開口扳手8件組
Insulated single-sided open-end spanner set,
8 pcs. Individually tested protective insulation
1,000 V AC, VDE and GS tested. 德國鉻釩鋼

Order-No.	Series					
33180	5590N T8					1 13,200
	5590N	7	8	10	11	
		13	15	17	19	



AC 1000V
IEC 60900:2004

當使用VDE絕緣工具工作，
需遵守國家的安全和事故預防條例

Wiha 絕緣套筒系列 VDE application sets.



- **7207N K1001** 3分絕緣套筒10件組 3/8"
3/8" reversible ratchet set, 10 pcs.
Protective insulation 1000 V AC.
德國鉻釩鋼

Order-No.	Series						
33183	7207N K1001						1 25,000
○	7207N	8	10	11	12		
		13	14	17	19		



- **7208N K1001** 4分絕緣套筒10件組 1/2"
1/2" reversible ratchet set, 10 pcs.
Protective insulation 1000 V AC.
德國鉻釩鋼

Order-No.	Series						
33184	7208N K1001						1 27,000
○	7208N	10	12	13	14		
		17	19	22	24		



- **7207N** 絕緣替換扳手組
Insulated nut driver set.
Protective insulation 1,000 VAC.

Order-No.	○		
36673		Reversible ratchet 3/8" x 190 mm	1 9,500
36674		Extension 3/8" x 125 mm	1 2,600
36675	8	Nut driver insert	1 1,800
36676	10	Nut driver insert	1 1,800
36677	11	Nut driver insert	1 1,800
36678	12	Nut driver insert	1 1,800
36679	13	Nut driver insert	1 1,800
36680	14	Nut driver insert	1 1,800
36681	17	Nut driver insert	1 1,800
36682	19	Nut driver insert	1 1,800



當使用VDE絕緣工具工作，
需遵守國家的安全和事故預防條例




405 11 損壞螺絲取出組16件
Screw extractor set with spiral drill bit, 16 pcs.

Order-No.	Series						
03988	405 11					1	5,000
●	405	2.0x85	2.5x85	3.0x85	4.0x85		
		5.0x85	6.0x95	8.0x95	10.0x110		
⊕		2.3x53	2.8x51	3.4x70	4.5x80		
		5.7x93	6.8x109	9.0x117	11.0x142		

Wiha 小知識




損壞或脫牙螺絲




斷裂螺絲頭




使用鑽尾鑽孔




將取出器敲擊至固定住螺絲




將取出器敲擊至固定住螺絲



使用扳手轉動取出器將螺絲轉出



使用扳手轉動取出器將螺絲轉出



螺絲取出器




59821 9 8孔T型扳手架

Order-No.	mm	mm	mm		
59821	170	95	85	1	280



59824 0 7孔旗型和型蝴蝶型扳手架

Order-No.	mm	mm	mm		
59824	80	48	42	1	100

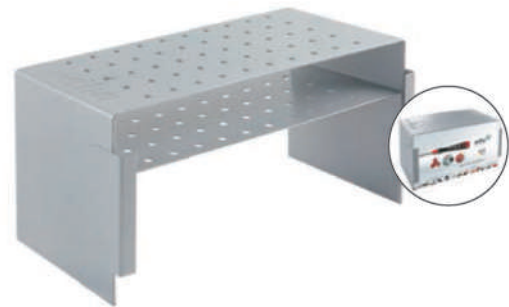

59814 1 PF 50孔起子展示架
適用於精密系列

Order-No.	mm	mm	mm		
59814	215	87	115	1	1,000



59800 4 扭力起子鐵盒

Order-No.	mm	mm	mm		
59800 4	255	55	220	1200	1 700

Wiha 收納包.



59803 5 PF起子工具袋
適用於精密起子系列
可以收納6支精密手柄系列
強化尼龍材質

不含工具

Order-No.	mm	±mm	↓mm		
59803	105	30	232	1	250



59802 8 六號工具袋
共可以收納1支手柄+13支起子頭

Order-No.	mm	↓mm		
59802	200	193	1	200



59804 2 SF起子工具袋
適用於所有雙色柄系列
可以收納6支雙色手柄系列
強化尼龍材質

不含工具

Order-No.	mm	±mm	↓mm		
59804	145	40	290	1	280



59825 7 迷你多功用型工具袋

Order-No.	mm	±mm	↓mm		
59825	310	200	240	1	700



59805 9 14件工具袋

Order-No.	mm	±mm	↓mm		
59805	295	70	257	1	450



59808 0 多功用型工具袋(水電包)

Order-No.	mm	±mm	↓mm		
59808	460	215	270	1	1,200



59801 1 四號工具袋
共可以收納1支手柄+11支起子頭
強化尼龍材質

不含工具

Order-No.	mm	↓mm		
59801	200	160	1	160



59807 3 多功用型工具腰袋

Order-No.	mm	±mm	↓mm		
59807	195	115	355	1	650



115件絕緣專業電工旗艦套組
assorted in case 115-pcs.

9300-704

Order-No.

9300-704

42069

1

Fastening / jamming

Torque screwdriver set TorqueVario®-S electric (36791)

- ⊖ ⊕ ⊕ ⊕ 1 x Torque screwdriver TorqueVario®-S electric variably settable torque limit, Tool tested at 10,000 V AC / 1 x Adjusting tool for torque screwdriver with long handle / 1 x slimBit bit holder electric, locked mechanically for VDE torque screwdriver with long handle Screwdriver with bit magazine LiftUp electric 1 x 2,5 / 1 x 3,0 / 1 x 5,5 / 1 x 6,5 / 1 x PH1 / 1 x PH2 / 1 x PZ1 PZ2 / 1 x SL/PZ1 / 1 x SIPZ2 / 1 x T9 / 1 x T10 / 1 x T15 / 1 x T20 / 1 x T25

Screwdriver with bit magazine LiftUp electric (41234)

1 x 2,5 / 1 x 3,5 / 1 x 5,5 / 1 x PZ1 PZ2 / 1 x SL/PZ2


- Screwdriver with bit holder SoftFinis® electric slimVario Stubby for slimBits (41229)

- ⊕ Bit slimBit electric Pozidriv, Tool tested at 10,000 V AC / PZ2 x 75 (34586)

- ⊖ Screwdriver SoftFinis® electric slimFix Slotted, Tool tested at 10,000 V AC / 3,5 x 100 (35446) / 5,5 x 125 (35391) / 6,5 x 150 (35392)

- ⊕ Screwdriver SoftFinis® electric slimFix Phillips, Tool tested at 10,000 V AC / PH1 x 80 (35393) / PH2 x 100 (35394)

- ⊕ Screwdriver SoftFinis® electric slimFix Pozidriv, Tool tested at 10,000 V AC / PZ1 x 80 (35395) / PZ2 x 100 (35396)



9300-026 29件維修工具包
Premium selection set, 29 pcs.

Order-No.	Series		15,000
36390	9300-026		1
⓪ 3021	SoftFinish® slotted screwdriver. Round blade with lasered mm scale. 4,0x100 5,5x125		
⊕ 3111	SoftFinish® Phillips screwdriver. Round blade with lasered mm scale. PH1x80 PH2x100		
⓪ 388DS	Bit holder with handle, magnetic, 1/4". 1/4x150		
Z 02 0 05	Professional high-leverage combination pliers, 200 mm With Wiha DynamicJoint® and OptiGrip. 200 mm 8"		
Z 16 0 05	Professional heavy-duty diagonal cutters, 180 mm With Wiha DynamicJoint®. 180 mm 7"		
Z 22 0 01	Classic water pump pliers with push button adjustment. 250 mm 10"		
410 2000	Longlife folding metre rule, 2 m, metric, 10 segments. white		
⊕ ⊕ ⊕ 7944-907	XSelector Standard, mixed, 11 pcs. 7011 Z: 1xPH1 1xPH2 1xPH3 7012 Z: 1xPZ1 1xPZ2 1xPZ3 7015 Z: 1xT15 1xT20 1xT25 1xT30 7149: ClicFix quick release holder, magnetic, style E 6.3.		
● 369 H9S	Hexagon ball end L-key set in ErgoStar holder. 369S: 1,5 2 2,5 3 4 5 6 8 10		



With Xeno bits

79187 T02 14件替換式起子頭組
Bit set for switch cabinet construction, 14 pcs.
Equipped with Phillips, Xeno-PH and TORX

Order-No.	Series		4,800
33143	79187 T02		1
281-02	1xBit holder with handle, magnetic, 1/4"		
7148CM	1xCentroFix quick release holder, magnetic, style E 6.3		
⊕ 7049XH	1xSL/PH1 2xSL/PH2		
⊕ 7041 Z	1xPH1 2xPH2 1xPH3		
⊕ 7045 Z	1xT10 1xT15 1xT20		
	1xT25 1xT30		



31件電工絕緣細頭替換起子組
mixed, 31-pcs. in functional bag

7209N

Order-No.		15,000
43465		1
⊖	2,0 x 75 / 3,5 x 75 / 5,5 x 75 / 6,5 x 75	
⊕	PH0 x 75 / PH1 x 75 / PH2 x 75	
⊕	SL/PZ1 x 75 / SL/PZ2 x 75	
⊕	PZ1 x 75 / PZ2 x 75	
⓪	5 x 42 / 5,5 x 42 / 6 x 42 / 7 x 42 / 8 x 42 / 10 x 42 / 11 x 42 / 13 x 42	
●	3 x 75 / 4 x 75 / 5 x 75	
⊕	T10 x 75 / T15 x 75 / T20 x 75 / T25 x 75	
	slimVari® electric adapter for 1/4" nut driver	
	Extension slimVari® electric for slimBits	
	Screwdriver with bit holder SoftFinish® slimVari® electric / Fine screwdriver PicoFinish® slimVari® electric	
⓪	Screwdriver with bit holder SoftFinish® electric slimVari® Stubby for slimBits, VDE and GS tested	

Manufactured acc. to IEC 60900.