

Digimatic Height Gage

SERIES 192 — Multi-function Type with SPC Data Output

FEATURES

- Highly versatile multi-function type.
- Carbide-tipped long scribe is provided.
- Rigid construction ensures repeatable measurement.
- Two-directional touch-signal probe is an optional accessory. It can quickly and accurately measure steps, inside width, and outside width.
- With SPC data output.



192-663-10




SPECIFICATIONS

Metric		
Range	Order No.	Accuracy
0 - 300mm	192-663-10	±0.02mm
0 - 600mm	192-664-10	±0.04mm
0 - 1000mm	192-665-10	±0.06mm

Inch/Metric		
Range	Order No.	Accuracy
0 - 12"	192-670-10	±.001"
0 - 18"	192-671-10	±.0015"
0 - 24"	192-672-10	±.0015"
0 - 40"	192-673-10	±.0025"

DIMENSION

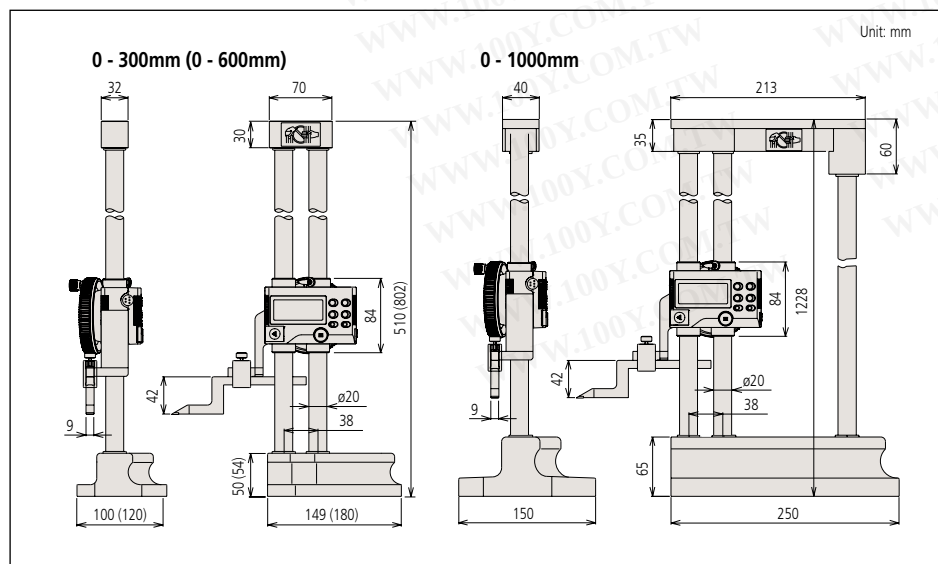

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Technical Data

Accuracy: Refer to the list of specifications.
 (excluding quantizing error for digital models)
 Resolution: 0.01mm (0.005mm) or
 .0005"/0.01mm (.0002"/0.005mm)
 Display: LCD, 6-digit
 Max. response speed: 500mm/s
 Battery: SR44 (1 pc.), **938882**
 Battery life: Approx. 3,500 hours under normal use

Function

Zero-setting, ABS/INC switching, Presetting (2 positions),
 Probe tip diameter compensation, +/- switching, Power ON/
 OFF, Data hold, Data output, inch/mm conversion (inch/mm
 models)
 Alarm: Low voltage, Counting value composition error

Standard Scribe Provided

Metric models: Carbide-tipped scribe (**905200**) and
 scribe clamp (**05GZA033**)
 Inch/Metric models: Carbide-tipped scribe (**905201**) and
 scribe clamp (**901385**)

Optional Accessory

905338: SPC cable (1m)
905409: SPC cable (2m)
905691: SPC cable (L-shape, 1m)
905692: SPC cable (L-shape, 2m)
192-007: Two-directional touch-signal probe (metric)
192-008: Two-directional touch-signal probe (inch)
953638: Holding bar for test indicator (length: 50mm)
900209: Holding bar for test indicator (length: 100mm)
953639: Holding bar for test indicator (length: 2")
900306: Holding bar for test indicator (length: 4")
900321: Swivel clamp used with holding bar (metric)
900322: Swivel clamp used with holding bar (inch)





Digimatic Height Gage

SERIES 192 — Standard Type with SPC Data Output

FEATURES

- Easy-to-use standard type.
- Carbide-tipped scriber is provided.
- Double-column structure ensures high measuring accuracy.
- With SPC data output.

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Technical Data

Accuracy: Refer to the list of specifications.
(excluding quantizing error for digital models)
Resolution: 0.01mm (0.005mm) or
.0005"/0.01mm (.0002"/0.005mm)
Display: LCD, 6-digit
Max. response speed: 500mm/s
Battery: SR44 (1 pc.), **938882**
Battery life: Approx. 3.500 hours under normal use

Function

Zero-setting, ABS/INC switching, Presetting (2 positions),
Probe tip diameter compensation, +/- switching, Power ON/
OFF, Data hold, Data output, inch/mm conversion (inch/mm
models)
Alarm: Low voltage, Counting value composition error

Standard Scriber Provided

Metric models: Carbide-tipped scriber (**07GZA000**) and
scriber clamp (**05GZA033**)

Inch/Metric models: Carbide-tipped scriber (**900258**) and
scriber clamp (**901385**)

Optional Accessory

905338: SPC cable (1m)
905409: SPC cable (2m)
905691: SPC cable (L-shape, 1m)
905692: SPC cable (L-shape, 2m)
953638: Holding bar for test indicator (length: 50mm)
900209: Holding bar for test indicator (length: 100mm)
953639: Holding bar for test indicator (length: 2")
900306: Holding bar for test indicator (length: 4")
900321: Swivel clamp used with holding bar (metric)
900322: Swivel clamp used with holding bar (inch)



192-613-10



SPECIFICATIONS

Metric		
Range	Order No.	Accuracy
0 - 300mm	192-613-10	±0.02mm
0 - 600mm	192-614-10	±0.05mm
0 - 1000mm	192-615-10	±0.07mm

Inch/Metric		
Range	Order No.	Accuracy
0 - 12"	192-630-10	±.001"
0 - 18"	192-631-10	±.002"
0 - 24"	192-632-10	±.002"
0 - 40"	192-633-10	±.003"

DIMENSION

