



With adjustable grinding speeds
from 250 and 750m/min.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Disc sander TSG 250/E

Sands long edges, end sections, radii, mitres, and, by turning the workpiece over - accurate flat surfaces at right angles.

Used on soft and hard woods, non-ferrous metals, steel, plastics (perspex and PC cards), cork and rubber. A simple chart indicates the recommended speeds on different materials.

Sturdy construction:

Main body of ribbed die-cast aluminium (no steel tube or sheet metal construction). Turned flat grinding disc, provided with silicone film: This ensures that affixed sanding discs can be removed effortlessly after use. Two additional square silicone films for storage and reuse of used sanding discs are included. With dust collection adapter for connection to a vacuum cleaner for dust-free working. Complete with mitre gauge and 2 each sanding discs in grain 80 and 240.

Technical data:

220 - 240V with drive via Optibelt toothed belt (reduction ratio 7.3:1). Electronic speed control approx. 250 - 750m/min. Disc diameter 250mm. Maximum sanding height 135mm, table 275 x 105mm (tilts 15° in, 45° out). Overall size without table 330 x 280 x 230mm.

NO 28 060



- 1 250mm-sanding disc machined with diamond tools. Double ball bearing.
- 2 Table size: 275 x 105mm with slot for mitre gauge and tilts up to 45°.



Note:

Equipped with suction connection and adapter for dust-free, clean sanding. We recommend our Compact Workshop vacuum cleaner CW-matic with integrated automatic switch control. The vacuum cleaner runs as long as the machine runs. There is a follow-up time of 5 seconds after switching off the power tool.

Self-adhesive corundum sanding discs for TSG 250/E

Industrial quality. For sanding soft and hard woods, chipboards, fibre boards, non-ferrous metals, steel, plastic, cork, rubber and minerals. Ø 250mm. Includes silicone film for storing used sanding discs.

NO 28 970 80 grit 5 discs

NO 28 972 150 grit 5 discs

NO 28 974 240 grit 5 discs

Self-adhesive silicone carbide sanding discs for TSG 250/E

For sanding non-ferrous metals, steel, glass, PC cards, plastics and ceramics. Ø 250mm. Includes silicone film for storing used sanding discs.

NO 28 976 320 grit 5 discs

Self-adhesive silicone film for easy sanding disc removal (Ø 250mm)

For retrofitting older disc sanders TG 250/E (production before 2007 with serial no. up to 14190). The film needs to be placed on the aluminium sanding disc and ensures easy removal of sandpaper discs after use. With 4 square silicone films for storage of used sanding discs and re-use when needed.


NO 28 968 set

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

迷你魔圓盤砂光機

220-240
VOLT

- 1 在水磨玻璃，石頭，瓦片或鋼時選裝冷卻系統
- 2 工作檯275x105mm,帶斜角度規滑槽，傾斜達45度
- 3 250mm的圓輪盤，表面經過機械加工，配備雙重球軸承的轉軸

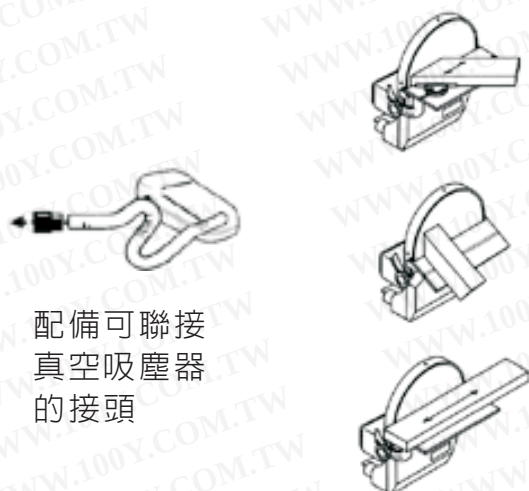

配備可聯接
真空吸塵器
的接頭



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

砂磨長邊、端截面、半徑及斜角。通過翻轉工件，使平面準確地轉到正確的角度。適用於軟硬木，有色金屬、鋼、塑料（樹脂玻璃及玻璃纖維），軟木及橡膠木及橡膠。有一個簡單的表格列出了砂磨不同物料的推薦速度專為條形工件正面，側面研磨修整而設計，角度規擋板用於設定水平角度，工作檯可往上打15度，往下打45度設定垂直角度，用於斜面研磨修整

28060 圓盤砂光機 **TG250/E**

修正編號為：
TSG 250/E

使用電源：220-240V帶齒皮帶驅動（減速比7:3:1）

電子控速，速度範圍約為：250-750rpm

最大磨砂高度：135mm

工作檯尺寸：330x280x230mm

全套包括斜角度規及2個砂光片，粒度100及240

用於~~TG250/E~~的自粘砂光片

工業用等級，樹脂金鋼砂紙，用於研磨軟硬木，合板，鐵，非鐵金屬，塑料橡膠等，直徑：250mm



28970 粒度 80 5片

28972 粒度 150 5片

28974 粒度 240 5片

工業用等級，樹脂矽鈣砂紙，用於研磨鐵，非鐵金屬，玻璃，石材，陶瓷及玻纖材料等，直徑：250mm

28976 粒度 320 5片

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



28188 冷卻水箱

塑料制品，帶龍頭及聯接到MBS230/E的工作台的100cm軟管，2個管接頭，以及固定鉸鏈（包括螺釘）



28189 冷卻水收集盤

尺寸420x310x15mm.包括密封機器固定孔的墊圈，帶有用於帶鋸工作台的50cm長的排水管及管接頭。此托盤可拆下並裝在別的機器上