


7000 Series Digital Panel Meters

DIMENSION OF DPM (3/128 DIN)

Unit: mm (inch)

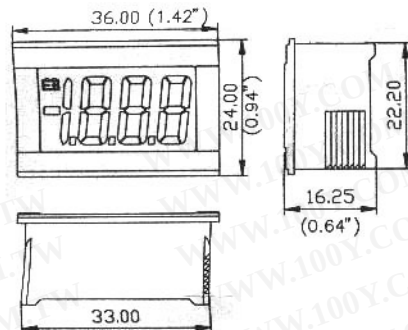

Specifications:

General:


- Display: 3 1/2 digit liquid crystal display (LCD) with maximum reading of 1999.
- Measurement Rate: 2.5 times per second, nominal.
- Operating Environment: 0°C to 60°C.
(32°F to 140°F)
- Storage temperature: -20°C to 75°C.
(-4°F to 167°F)
- Humidity: less than 75% RH.

Electrical:

- Range: -20°C to 200°C
Resolution: 1°C
- Accuracy: $\pm(2.0\% \text{dgt} \pm 3 \text{dgt})$
- Range: -4°F to 392°F
Resolution: 1°F
Accuracy: $\pm(2.0\% \text{dgt} \pm 6 \text{dgt})$
- Temperature coefficient: (0°C to 60°C)
 $\pm 0.15 \text{dgt}/^\circ\text{C}$ (Max.)

* We make what you need and We provide what you wish, any special order or OME project is welcomed.



Purchasing notes:

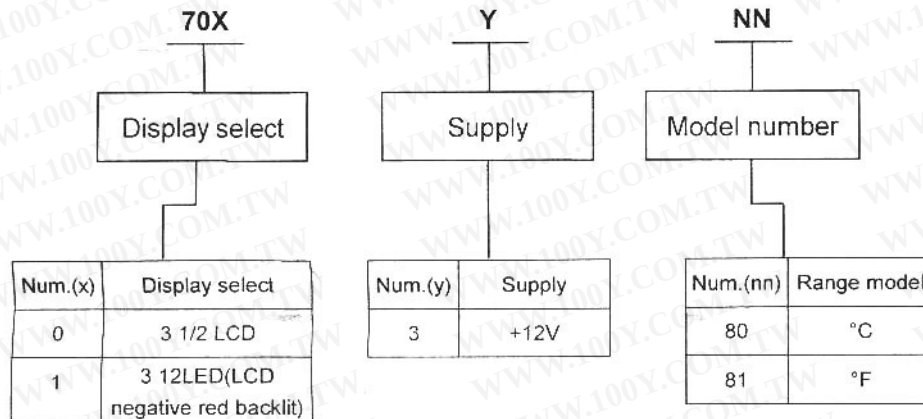

Note: No backlit display for 9V supply voltage.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MD : 70X380+APPLICATION BOARDS



+12V POWER CIRCUIT

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)