

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

(5.00 mm) .197"

GRF1-P-P-08-E-ST-TH1

GRF1-P-P-04-E-ST-TH1

GRF1-J-P-04-E-ST-TH1

GRF1-J-P-04-E-ST-TH1-E

GRF1-J, GRF1-P SERIES

50 Ω GANGED MICRO-MINI RF SYSTEMS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?GRF1-J or www.samtec.com?GRF1-P

Shell Material:
Brass

Insulator Material:
PTFE

Contact Material:
BeCu

Pin Material:
Brass

Plating:

30 μ" (0.76 μm) Au
 over 50 μ" (1.27 μm) Ni

Current Rating (GRF1-J/GRF1-P):

Signals: 3.6 A per pin
 (8 adjacent pins powered)

Grounds: 6.2 A per pin
 (8 adjacent pins powered)

Operating Temp Range:

-40 °C to +90 °C

Impedance:

50 Ω

Dielectric

Withstanding Voltage:

500 Vrms, 50 Hz

Dielectric Working Voltage:

170 Vrms, 50 Hz

Frequency Range:

0-6 GHz

RoHS Compliant:

Yes

GRF1

J

P

NO. OF JACKS

PLATING

LEAD STYLE

TH1

INSERT OPTION

Mates with:

GRF1-P, GRF1-C,
 GRF1H-C

-02, -04,
 -06, -08

-E

= 30 μ" (0.76 μm)
 Gold on Center
 Conductor & Tail,
 Gold Flash on
 Shell and Tails

-ST



= Vertical

-RA

= Right-angle

-E

= #1 - 64 Through-hole
 Threaded Insert,
 Mates with GRF1-C with
 captive screw option

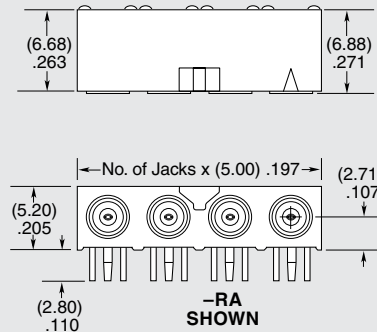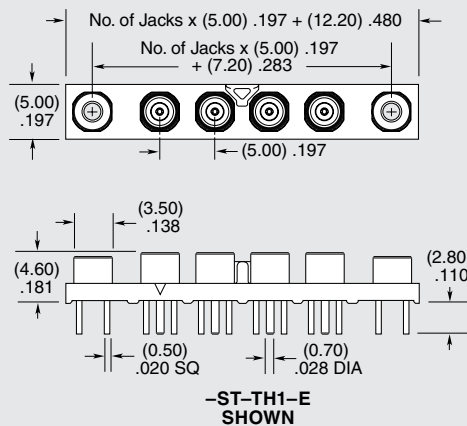

PROCESSING

Lead-Free Solderable:
 Yes


RECOGNITIONS

For complete scope of
 recognitions see
www.samtec.com/quality



FILE NO. E111594

APPLICATION



OTHER SOLUTIONS

- Cable assembly
 (see GRF1-C Series)

GRF1

P

P

NO. OF PLUGS

PLATING

ST

TH1

Mates with:

GRF1-J

-02, -04, -06, -08

-E

= 30 μ" (0.76 μm) Gold on Center Conductor & Tail,
 Gold Flash on Shell and Tails

