

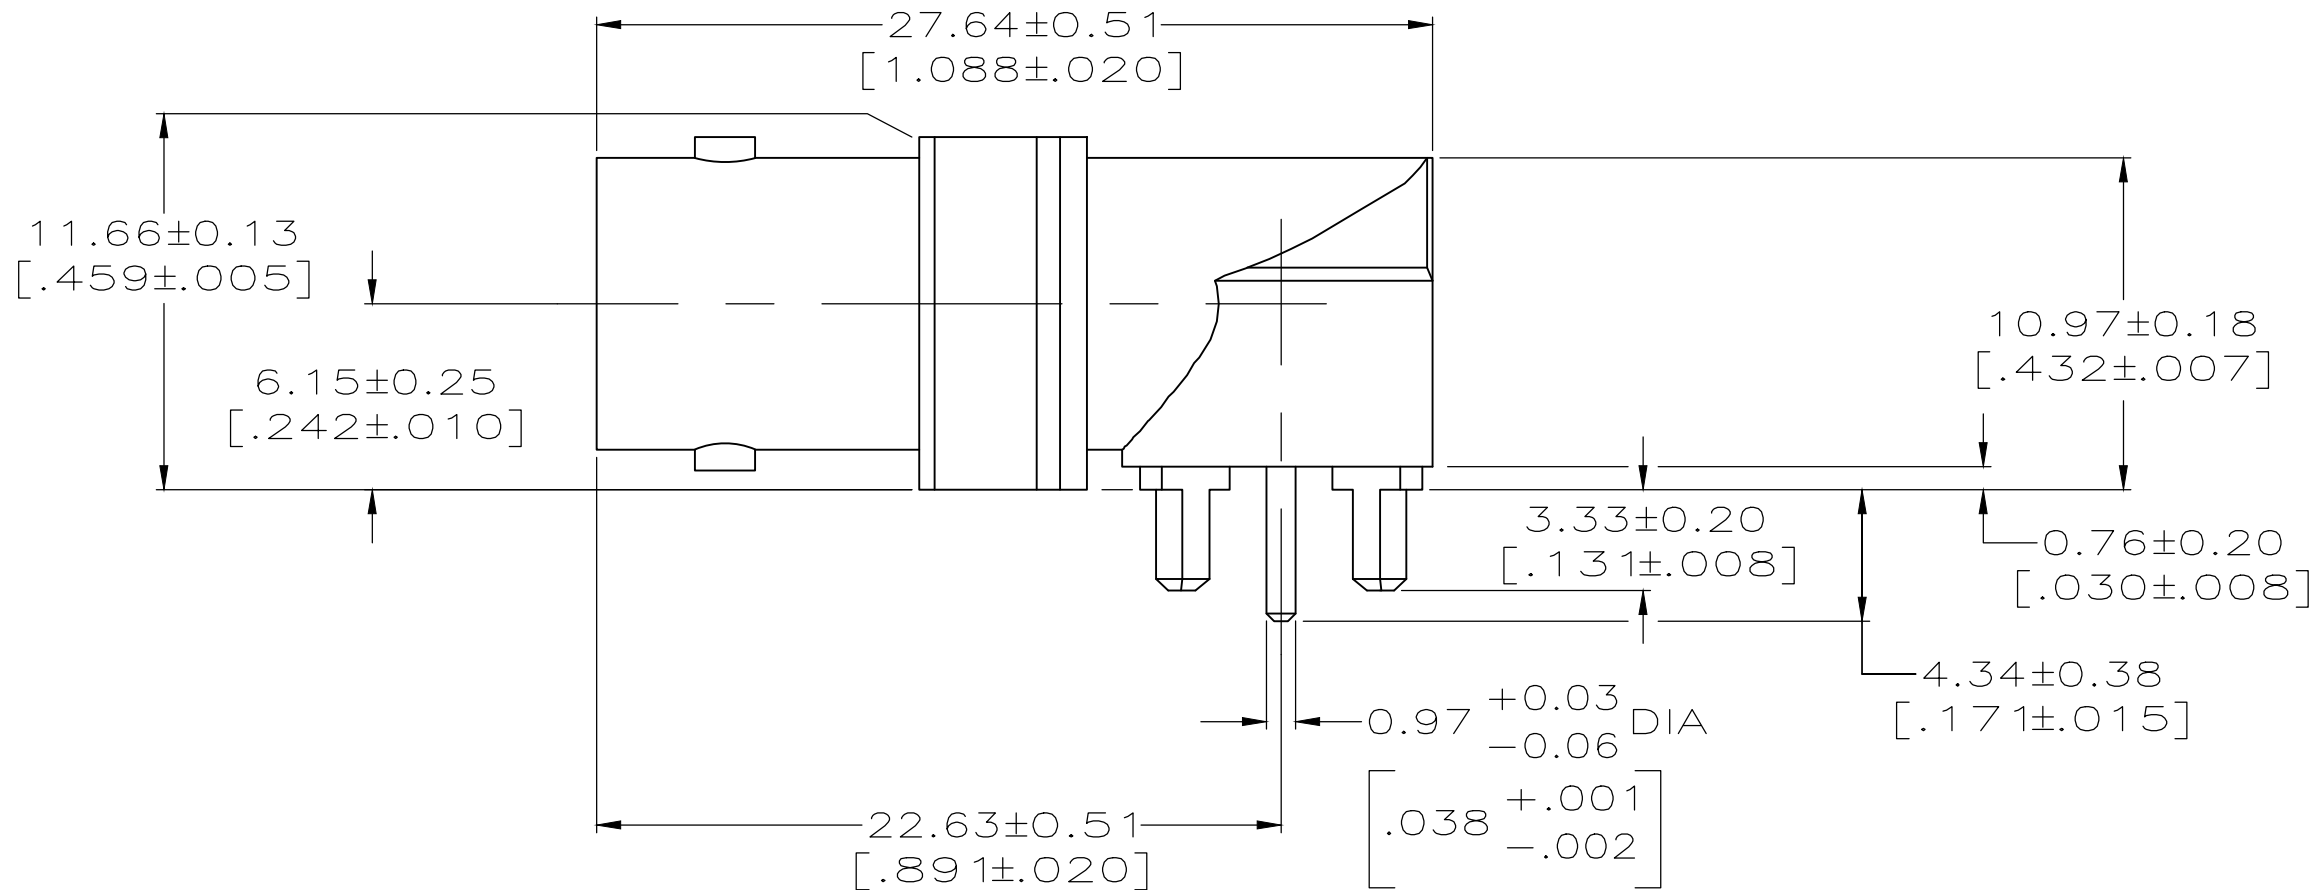
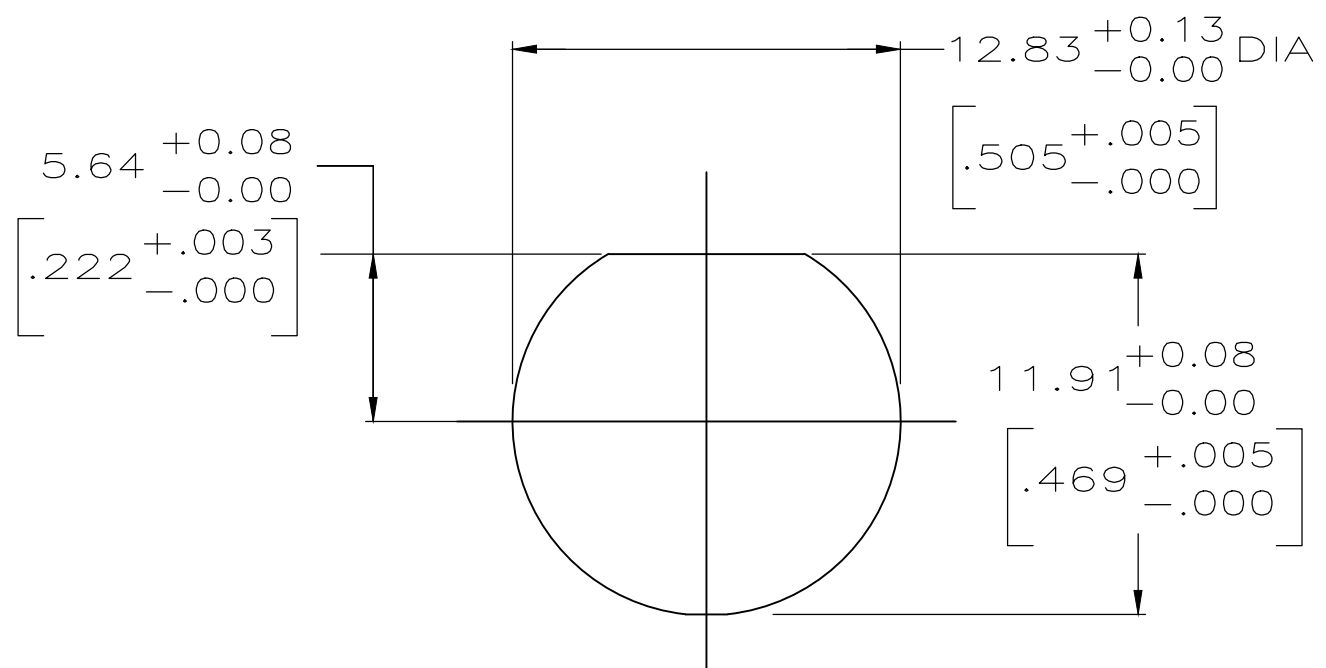


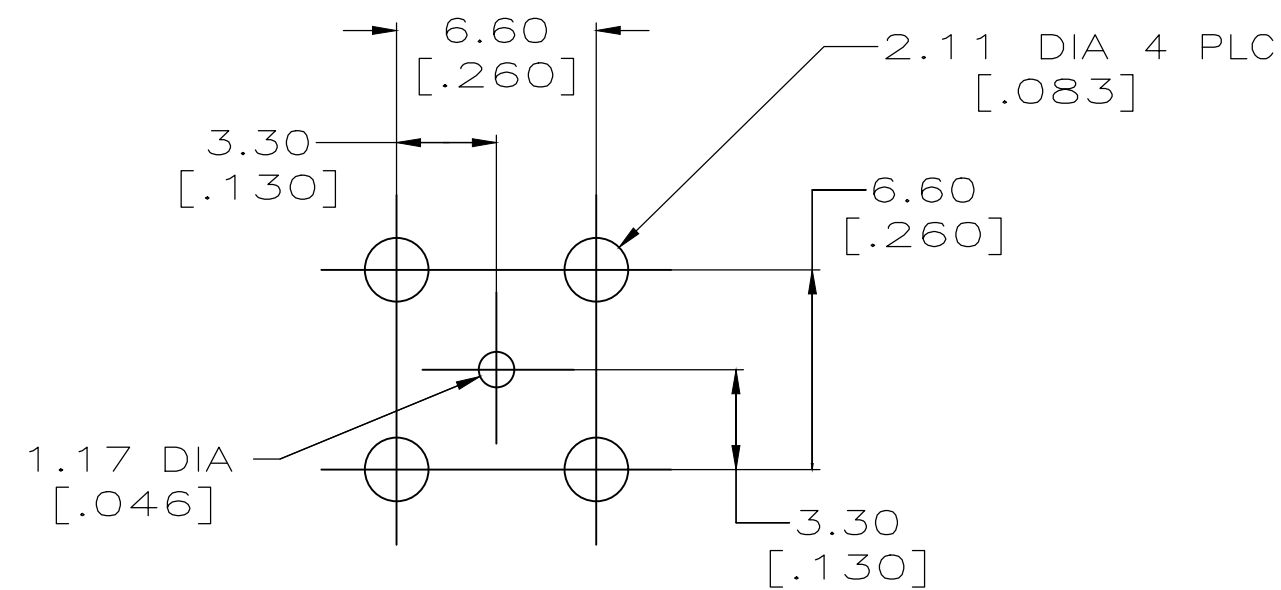

- 1 ZINC PER QQ-Z-363.
- 2 PHOSPHOR BRONZE PER QQ-B-750.
- 3 PTFE PER MIL-P-19468.
- 4 POLYMETHYLPENTENE, GENERAL PURPOSE
- 5 TIN PLATE PER ASTM-B-545, $3.81\mu\text{m}$ [$.000150$] MINIMUM THICK OVER
- 6 GOLD PLATE PER MIL-G-45204, $0.20\mu\text{m}$ [$.000008$] MINIMUM THICK.
- 7. INTERFACE PER MIL-C-39012
- 8 MODIFIED MAJOR DIAMETER TO 12.29 [$.484$]

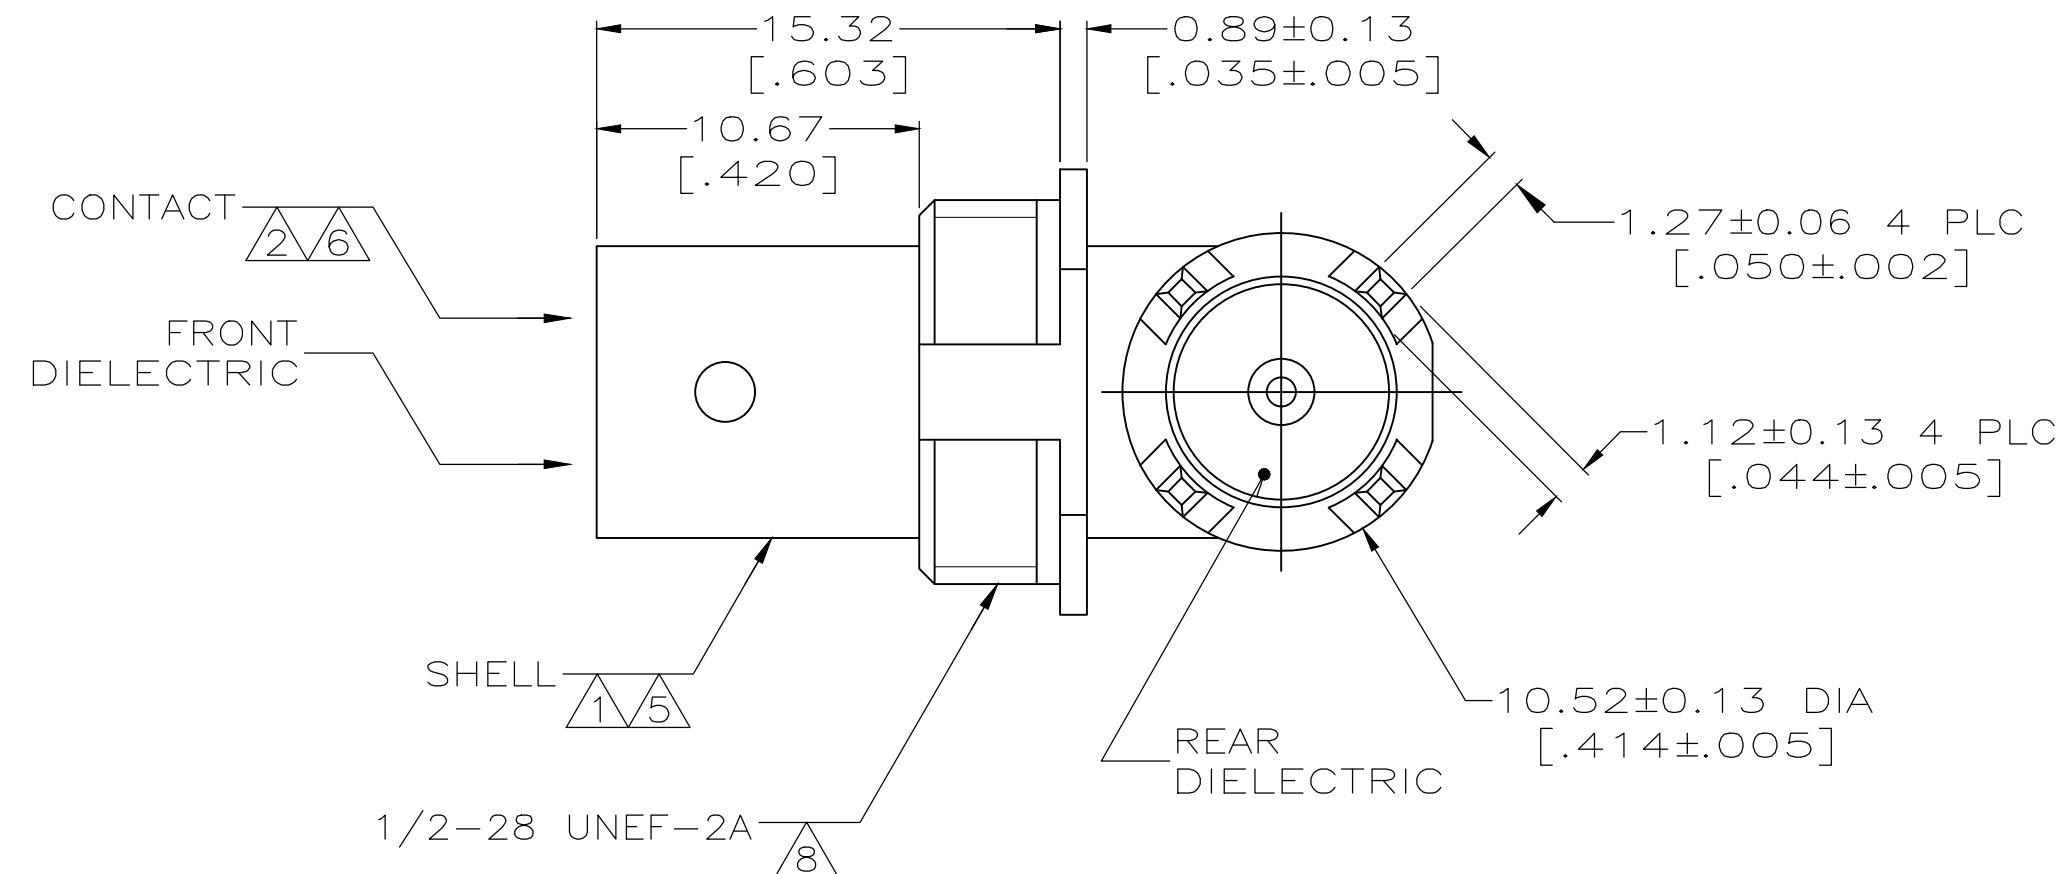

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3	3	5415025-2
3	4	5415025-1
REAR	FRONT	PART NUMBER
DIELECTRIC MATERIAL		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. ATTADIA - 01FEB2005	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK J. HAVENER 01FEB2005			
		APVD J. LIPPERT 01FEB2005	NAME		
		PRODUCT SPEC 108-12078	JACK, RIGHT ANGLE, 50 OHM, PCB, BNC		
MATERIAL SEE NOTES 1-4		APPLICATION SPEC -	SIZE A2	CAGE CODE 00779	DRAWING NO C=5415025
FINISH SEE NOTES 5, 6		WEIGHT 0.000000	RESTRICTED TO -	SCALE 4:1	SHEET 1 OF 1
		CUSTOMER DRAWING	REV A2		