

賽威樂 626 熱風式 SMD 拆焊烙鐵




XYTRONIC's unique hot air rework system offers the technology to address your most complicated SMD rework requirements!

特點：

- 採用美國製泵浦，風量大，聲音小，壽命長。
- 採用日本進口陶瓷發熱體，壽命長。
- 風量可調，溫度可調。
- 冷風延遲裝置，保護發熱體，使發熱體壽命更長。
- 多種吹風頭可供選擇。

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

COMMON FOCUS HOOD SIZES

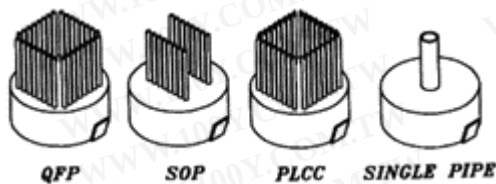

SPECIFICATIONS

Power Supply	100-120 Va.c. or 220-240Va.c.
Pump	Diaphragm 25W
Air Flow Capacity	1.5L/min - 25L/min
Heating Element	Ceramic - 310 W
Hot air Temperature	100 - 385 (212 - 725)
Weight	4.9 kg. (10.8 lb.)
Dimensions	235 x 195 x 125mm (9.25 x 7.70 x 4.95 in)

PART NO.	APPLICATION	PART NO.	APPLICATION	PART NO.	APPLICATION
*SP - 1L	5X1 SINGLE	QFP 2626	QFP 26X26	SOP 1808	SOP 18X 8
SP-1	1X1 SINGLE	QFP 2828	QFP 28X28	PLCC 20	PLCC20PINS
SP-2	1X2 4mm	QFP 3131	QFP 31X31	PLCC 28	PLCC28PINS
SP-5	1X5 11mm	SOJ256K	FOR DRAM25K	PLCC 32	PLCC32PINS
SP-7	1X7 16mm	SOJ1M	FOR DRAM1K	PLCC 44	PLCC44PINS
QFP1010	QFP 10X10	SOJ40	FOR SRAM (SOJ)	PLCC52	PLCC52PINS
QFP1414	QFP 14X14	SOP0804	SOP 8X4	PLCC68	PLCC68PINS
QFP1420	QFP 14X20	SOP1004	SOP 10X4	PLCC84	PLCC80PINS
QFP1515	QFP 15X15	SOP1306	SOP 13X6	PLCC	PLCC100PINS
QFP1717	QFP 17X17	SOP1308	SOP 13X8		