



CONQUER


ELECTRONICS FUSES

Type ABE/ABP 6.3øx32mm

Fast Acting Ceramic Tube Fuse Series

ABE

ABP

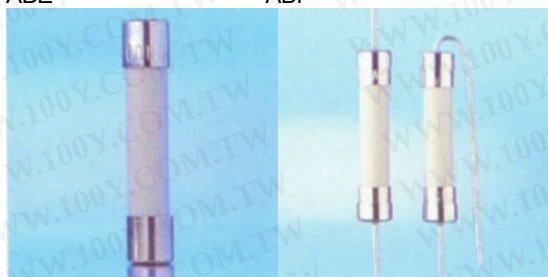

Approvals



ABE

UL Listed	10mA~15A
UL Recognized	15.1A~25A
CSA Certified	10mA~15A
CSA Acceptance	15.1A~25A
MITI	1A~15A

ABP (With Pig-Tail)

UL Listed	10mA~15A
UL Recognized	15.1A~20A
CSA Certified	10mA~15A
CSA Acceptance	15.1A~20A
MITI	1A~15A

Electrical Characteristics

Rated Current	1 In	1.35 In	2 In
	MIN	MAX	MAX
10mA~30A	4 Hrs.	1 hr	30 Sec

Interrupting Ratings

10mA~10A:	10,000 amperes at 125V AC
10mA~1A:	35 amperes at 250V AC
1.25A~3.5A:	100 amperes at 250V AC
3.75A~10A:	200 amperes at 250V AC
10.1A~25A:	750 amperes at 250V AC/DC

Operating Temperature

-55 to +125

Physical Specification

Materials

Ceramic body / Nickel Plated Brass Caps
Lead Wire:
Diameter ϕ 0.8 mm 12A and less.
Diameter ϕ 1.0 mm for rating above 13A to 19A.
Diameter ϕ 1.2 mm for rating above 20A.


Packaging

In Bulk:
ABE-500 pcs ; ABP-250 pcs per box

Cartridge Catalog Number	Axial Lead Catalog Number	Ampere Rating [In]	Voltage Rating (V)	Nominal Resistance Cold Ohms	Nominal Melting I ² t A ² Sec
ABE .010	ABP .010	10 mA	250V	*	*
ABE .020	ABP .020	20 mA		*	*
ABE .030	ABP .030	30 mA		*	*
ABE .032	ABP .032	32 mA (1/32A)		*	*
ABE .040	ABP .040	40 mA		*	*
ABE .050	ABP .050	50 mA		*	*
ABE .060	ABP .060	60 mA		*	*
ABE .063	ABP .063	63 mA		*	*
ABE .070	ABP .070	70 mA		*	*
ABE .080	ABP .080	80 mA		*	*
ABE .100	ABP .100	100 mA		14.600	0.00200
ABE .125	ABP .125	125 mA		10.200	0.00312
ABE .150	ABP .150	150 mA		7.7000	0.00450
ABE .160	ABP .160	160 mA		7.0000	0.00512
ABE .200	ABP .200	200 mA		6.0000	0.00800
ABE .250	ABP .250	250 mA		3.3500	0.01250
ABE .300	ABP .300	300 mA		2.8000	0.01800
ABE .315	ABP .315	315 mA		2.3000	0.01984
ABE .350	ABP .350	350 mA		2.0000	0.02450
ABE .375	ABP .375	375 mA		1.6500	0.02812
ABE .400	ABP .400	400 mA		1.4000	0.32000
ABE .500	ABP .500	500 mA		0.6120	0.07500
ABE .600	ABP .600	600 mA		0.4740	0.10800
ABE .630	ABP .630	630 mA		0.3850	0.11900
ABE .700	ABP .700	700 mA		0.3500	0.14700
ABE .750	ABP .750	750 mA		0.3200	0.16870
ABE .800	ABP .800	800 mA		0.2910	0.16870
ABE 001	ABP 001	1 A		0.2205	1.50000
ABE 1.25	ABP 1.25	1.25 A		0.1758	2.34300
ABE 1.50	ABP 1.50	1.5 A		0.1223	4.50000
ABE 002	ABP 002	2 A		0.0844	8.00000
ABE 2.50	ABP 2.50	2.5 A		0.0737	12.5000
ABE 003	ABP 003	3 A		0.0612	13.5000
ABE 3.50	ABP 3.50	3.5 A		0.0430	18.3750
ABE 004	ABP 004	4 A		0.0339	24.0000
ABE 4.50	ABP 4.50	4.5 A		0.0263	30.3750
ABE 005	ABP 005	5 A		0.0234	37.5000
ABE 006	ABP 006	6 A		0.0177	54.0000
ABE 6.30	ABP 6.30	6.3 A		0.0170	59.5350
ABE 007	ABP 007	7 A		0.0153	98.0000
ABE 7.50	ABP 7.50	7.5 A		0.0140	112.500
ABE 008	ABP 008	8 A		0.0129	160.000
ABE 010	ABP 010	10 A		0.0111	300.000
ABE 012	ABP 012	12 A		0.0078	576.000
ABE 013	ABP 013	13 A		0.0071	845.000
ABE 015	ABP 015	15 A		0.0061	1125.00
ABE 016	ABP 016	16 A		0.0053	1280.00
ABE 018	ABP 018	18 A		0.0044	1620.00
ABE 020	ABP 020	20 A		0.0041	2400.00
ABE 025	ABP 025	25 A		0.0029	3750.00
ABE 030	ABP 030	30 A		0.0023	5400.00

*Please contacts CONQUER.

Mechanical Dimensions

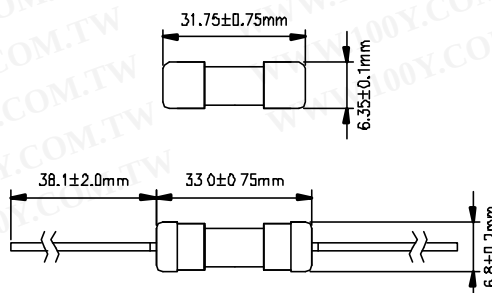

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)