


# NAIS

## HF (High Function) Type [1-Channel (Form A) Type]

# PhotoMOS RELAYS

### FEATURES

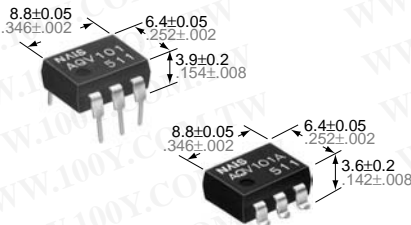

mm inch

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**1. Controls low-level analog signals**  
 PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

**2. Control with low-level input signals**  
**3. Controls various types of loads such as relays, motors, lamps and solenoids.**

**4. Optical coupling for extremely high isolation**  
 Unlike mechanical relays, the PhotoMOS relay combines LED and optoelectronic device to transfer signals using light for extremely high isolation.

**5. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**

**6. Stable on resistance**

**7. Low-level off state leakage current**  
**8. Eliminates the need for a power supply to drive the power MOSFET**

A power supply used to drive the power MOSFET is unnecessary because of the built-in optoelectronic device. This results in easy circuit design and small PC board area.

**9. Low thermal electromotive force (Approx. 1 μV)**

### TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computer

### TYPES

#### 1. DC type (AQV10 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal	Surface-mount terminal		Tape and reel packing style		
Load voltage	Load current		Tube packing style		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube
40 V	700 mA	AQV101	AQV101A	AQV101AX	AQV101AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	600 mA	AQV102	AQV102A	AQV102AX	AQV102AZ		
250 V	300 mA	AQV103	AQV103A	AQV103AX	AQV103AZ		
400 V	180 mA	AQV104	AQV104A	AQV104AX	AQV104AZ		

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

#### 2. AC/DC type (AQV20 types)

Output rating*		Part No.				Packing quantity	
		Through hole terminal	Surface-mount terminal		Tape and reel packing style		
Load voltage	Load current		Tube packing style		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side	Tube
40 V	500 mA	AQV201	AQV201A	AQV201AX	AQV201AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs
60 V	400 mA	AQV202	AQV202A	AQV202AX	AQV202AZ		
250 V	200 mA	AQV203	AQV203A	AQV203AX	AQV203AZ		
400 V	150 mA	AQV204	AQV204A	AQV204AX	AQV204AZ		

\*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

AQV100, 200

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**RATING**

**1. DC type (AQV10 types)**

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA				
	LED reverse voltage	V <sub>R</sub>	6 V				
	Peak forward current	I <sub>FP</sub>	1 A				f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P <sub>in</sub>	150 mW				
Output	Load voltage (DC)	V <sub>L</sub>	40 V	60 V	250 V	400 V	
	Continuous load current (DC)	I <sub>L</sub>	0.7 A	0.6 A	0.3 A	0.18 A	
	Peak load current	I <sub>peak</sub>	1.8 A	1.5 A	0.6 A	0.5 A	100 ms (1 shot)
	Power dissipation	P <sub>out</sub>	360 mW				
Total power dissipation		P <sub>T</sub>	410 mW				
I/O isolation voltage		V <sub>iso</sub>	1,500 V (AC)				
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQV101(A)	AQV102(A)	AQV103(A)	AQV104(A)	Condition	
Input	LED operate current	Typical	I <sub>Fon</sub>	2.3 mA				I <sub>L</sub> = Max.	
		Maximum		5 mA					
	LED turn off current	Minimum	I <sub>Foff</sub>	0.8 mA				I <sub>L</sub> = Max.	
		Typical		2.2 mA					
LED dropout voltage	Typical	V <sub>F</sub>	2.3 V				I <sub>F</sub> = 10 mA		
	Maximum		3 V						
Output	On resistance	Typical	R <sub>on</sub>	0.3 Ω	0.37 Ω	2.7 Ω	6.3 Ω	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max. Within 1 s on time	
		Maximum		0.5 Ω	0.7 Ω	4 Ω	8 Ω		
Off state leakage current		Maximum	—	1 μA				I <sub>F</sub> = 0, V <sub>L</sub> = Max.	
Transfer characteristics	Switching speed	Turn on time*	T <sub>on</sub>	0.23 ms	0.22 ms	0.13 ms	0.09 ms	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max.	
		Maximum		1 ms					
	Turn off time*	T <sub>off</sub>	0.07 ms	0.07 ms	0.07 ms	0.08 ms	I <sub>F</sub> = 10 mA I <sub>L</sub> = Max.		
			Maximum	1 ms					
	I/O capacitance		Typical	C <sub>iso</sub>	1.3 pF				f = 1 MHz
			Maximum		3 pF				
Initial I/O isolation resistance		Minimum	R <sub>iso</sub>	1,000 MΩ				500 V DC	

Note: Recommendable LED forward current I<sub>F</sub>= 5 to 10 mA.

\*Turn on/Turn off time

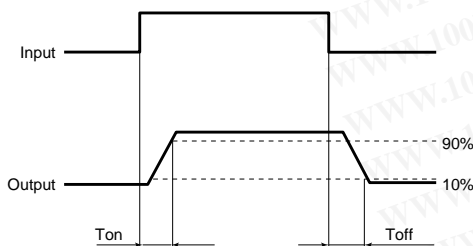

2. AC/DC type (AQV20 types)

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED forward current	$I_F$		50 mA				f = 100 Hz, Duty factor = 0.1%	
	LED reverse voltage	$V_R$		6 V					
	Peak forward current	$I_{FP}$		1 A					
	Power dissipation	$P_{in}$		150 mW					
Output	Load voltage (peak AC)	$V_L$		40 V	60 V	250 V	400 V	A connection: Peak AC, DC B, C connection: DC	
	Continuous load current	$I_L$		A	0.5 A	0.4 A	0.2 A		0.15 A
				B	0.7 A	0.6 A	0.3 A		0.18 A
				C	1.0 A	0.8 A	0.4 A		0.25 A
	Peak load current	$I_{peak}$		1.8 A	1.5 A	0.6 A	0.5 A		A connection 100 ms (1 shot) $V_L = DC$
Power dissipation	$P_{out}$	360 mW							
Total power dissipation		$P_T$	410 mW						
I/O isolation voltage		$V_{iso}$	1,500 V AC						
Temperature limits	Operating	$T_{opr}$	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperature		
	Storage	$T_{stg}$	-40°C to +100°C -40°F to +212°F						


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection**	AQV201(A)	AQV202(A)	AQV203(A)	AQV204(A)	Remarks	
Input	LED operate current	Typical	$I_{Fon}$	2.4 mA				$I_L = Max.$	
		Maximum		5 mA					
	LED turn off current	Minimum	$I_{Foff}$	0.8 mA				$I_L = Max.$	
		Typical		2.2 mA					
LED dropout voltage	Typical	$V_F$	2.3 V				$I_F = 10 mA$		
	Maximum		3 V						
Output	On resistance	Typical	$R_{on}$	A	0.6 Ω	0.74 Ω	5.5 Ω	12.4 Ω	$I_F = 10 mA$ $I_L = Max.$ Within 1 s on time
		Maximum		1 Ω	1.4 Ω	8 Ω	16 Ω		
		Typical	$R_{on}$	B	0.3 Ω	0.37 Ω	2.7 Ω	6.2 Ω	$I_F = 10 mA$ $I_L = Max.$ Within 1 s on time
		Maximum		0.5 Ω	0.7 Ω	4 Ω	8 Ω		
	Typical	$R_{on}$	C	0.15 Ω	0.18 Ω	1.4 Ω	3.1 Ω	$I_F = 10 mA$ $I_L = Max.$ Within 1 s on time	
	Maximum		0.25 Ω	0.35 Ω	2 Ω	4 Ω			
Off state leakage current	Maximum	—	—	1 μA				$I_F = 0, V_L = Max.$	
Transfer characteristics	Switching speed	Turn on time*	Typical	$T_{on}$	0.38 ms	0.41 ms	0.21 ms	0.18 ms	$I_F = 10 mA$ $I_L = Max.$
			Maximum		1 ms				
		Turn off time*	Typical	$T_{off}$	0.08 ms	0.08 ms	0.07 ms	0.07 ms	$I_F = 10 mA$ $I_L = Max.$
			Maximum		1 ms				
	I/O capacitance	Typical	$C_{iso}$	—	1.3 pF				f = 1 MHz
Maximum		3 pF							
Initial I/O isolation resistance	Minimum	$R_{iso}$	—	1,000 MΩ				500 V DC	

Note: Recommendable LED forward current  $I_F = 5$  to 10 mA.

\*Turn on/Turn off time

\*\*type of connection

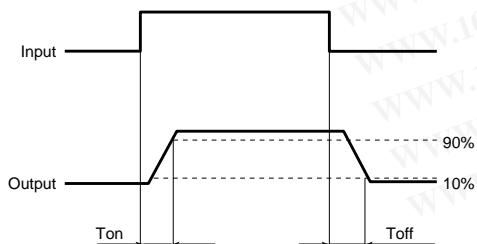

■ For Dimensions, see Page 440.

■ For Schematic and Wiring Diagrams, see Page 444.


■ For Cautions for Use, see Page 449.

# AQV100, 200

## REFERENCE DATA

1.-(1) Load current vs. ambient temperature characteristics (DC type)


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

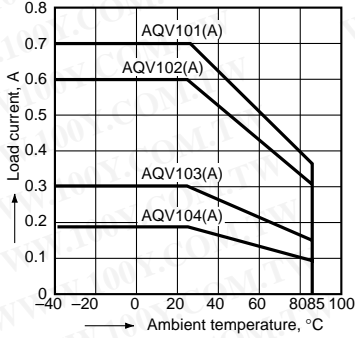

1.-(2) Load current vs. ambient temperature characteristics (AC/DC type)


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

Type of connection: A

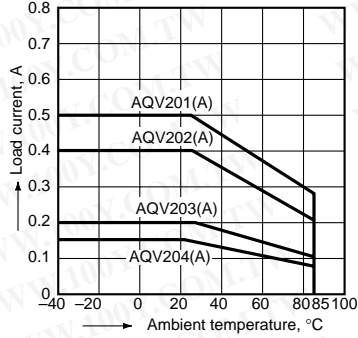


2.-(1) On resistance vs. ambient temperature characteristics (DC type: AQV101, AQV102)

LED current: 10 mA;  
Continuous load current: Max. (DC)

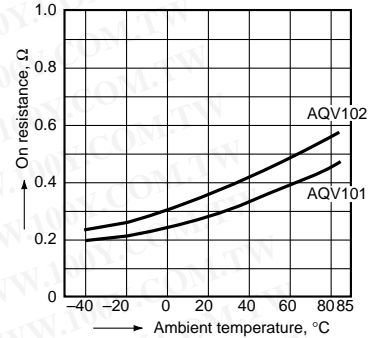


2.-(2) On resistance vs. ambient temperature characteristics (DC type: AQV103, AQV104)

LED current: 10 mA;  
Continuous load current: Max. (DC)

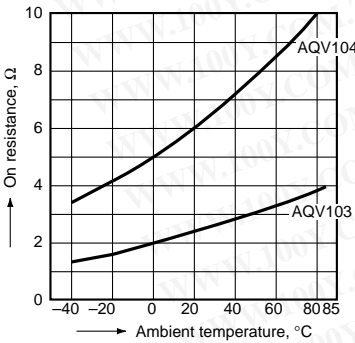


2.-(3) On resistance vs. ambient temperature characteristics (AC/DC type: AQV201, AQV202)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

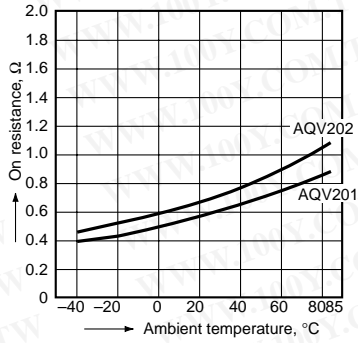


2.-(4) On resistance vs. ambient temperature characteristics (AC/DC type: AQV203, AQV204)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

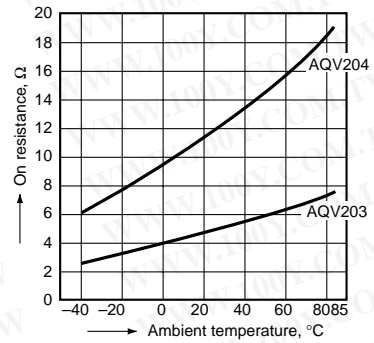


3.-(1) Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

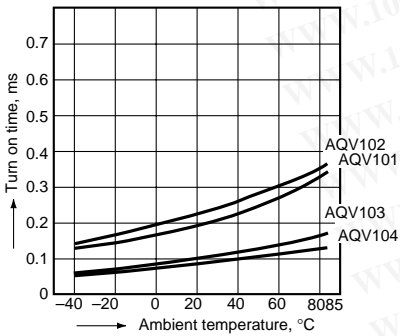


3.-(2) Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

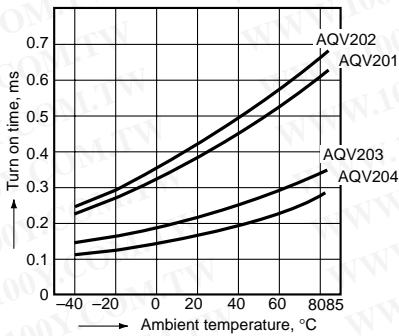


4.-(1) Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

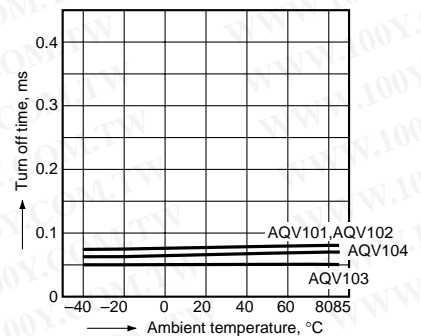


4.-(2) Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

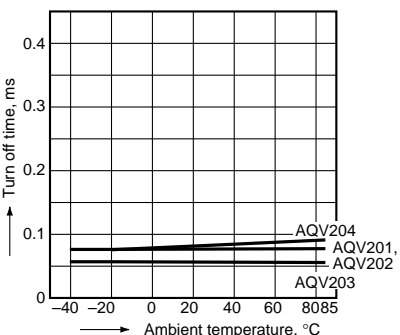


5.-(1) LED operate/turn off current vs. ambient temperature characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

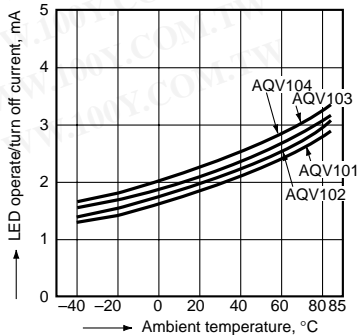


5.-(2) LED operate/turn off current vs. ambient temperature characteristics (AC/DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

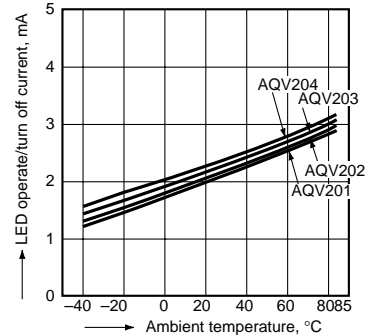


## 6. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV202  
LED current: 10 to 50 mA

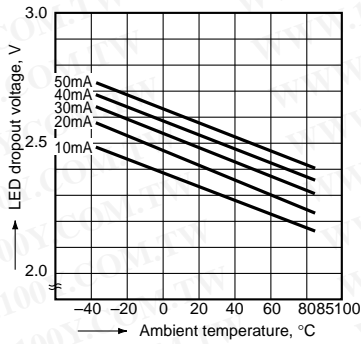


## 7.-(1) Voltage vs. current characteristics of output at MOS portion (DC type)

Ambient temperature: 25°C 77°F

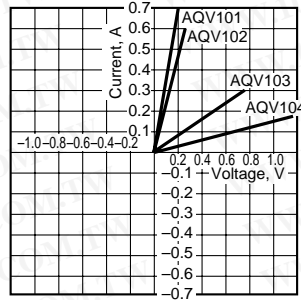


## 7.-(2) Voltage vs. current characteristics of output at MOS portion (AC/DC type)

Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

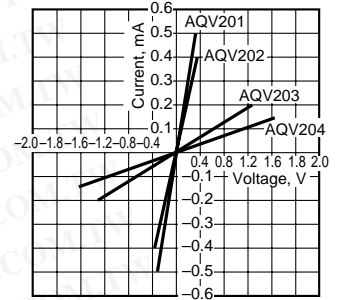


## 8. Off state leakage current

Sample: AQV204;  
Measured portion: between terminals 4 and 6;  
Ambient temperature: 25°C 77°F

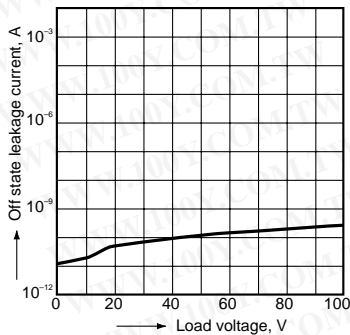


## 9.-(1) LED forward current vs. turn on time characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

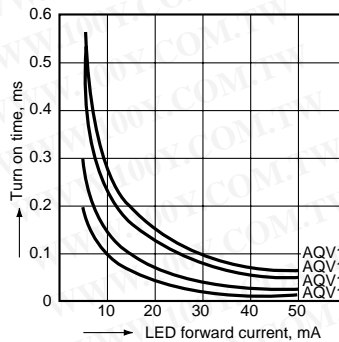


## 9.-(2) LED forward current vs. turn on time characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

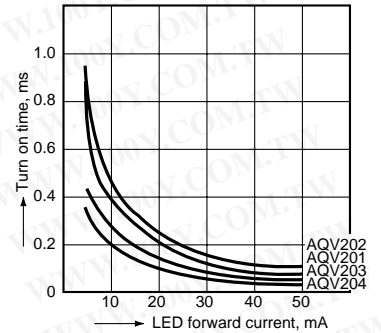


## 10.-(1) LED forward current vs. turn off time characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

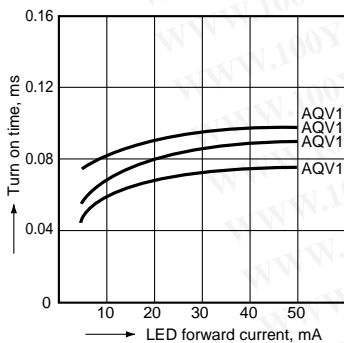


## 10.-(2) LED forward current vs. turn off time characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC);  
Ambient temperature: 25°C 77°F

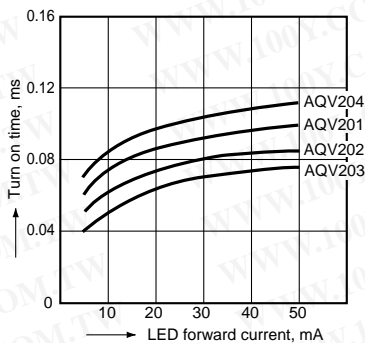


## 11.-(1) Applied voltage vs. output capacitance characteristics (DC type)

Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

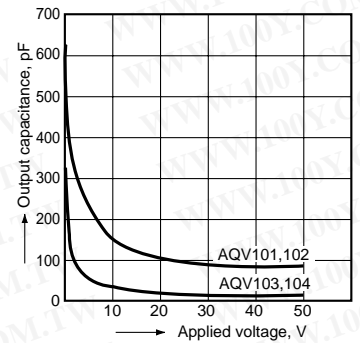

## 11.-(2) Applied voltage vs. output capacitance characteristics (AC/DC type)

Measured portion: between terminals 4 and 6;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

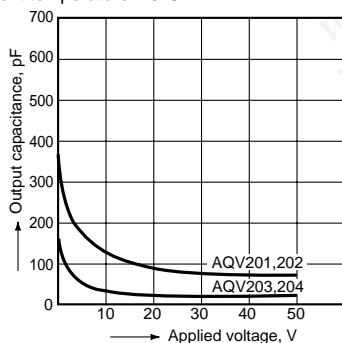

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)