



DACO SEMICONDUCTOR CO., LTD.

AR(S)2501G
THRU
AR(S)2507G

AUTOMOTIVE GLASS PASSIVATED RECTIFIERS TYPE 25A

Features

- High Surge Capability
- High Current Capability
- Types up to 1000V V_{RRM}

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


25Amp
BUTTON DIODE
50-1000 Volts

Maximum Ratings

Operating Temperature: -50°C to $+215^{\circ}\text{C}$
Storage Temperature: -50°C to $+215^{\circ}\text{C}$


Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
AR(S)2501G	50V	35V	50V
AR(S)2502G	100V	70V	100V
AR(S)2503G	200V	140V	200V
AR(S)2504G	400V	280V	400V
AR(S)2505G	600V	420V	600V
AR(S)2506G	800V	560V	800V
AR(S)2507G	1000V	700V	1000V

BUTTON-AR

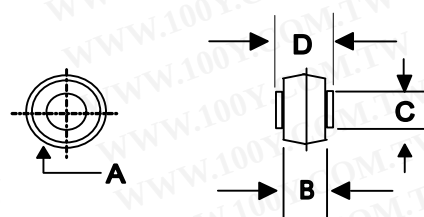

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.380	.410	9.7	10.4	
B	.165	.185	4.20	4.70	
C	.215	.225	5.50	5.70	
D	.235	.250	6.00	6.40	

BUTTON-ARS

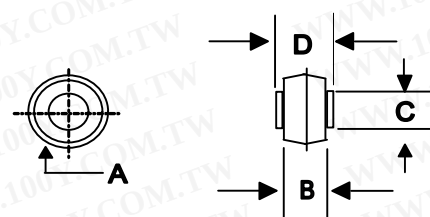

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.327	.347	8.30	8.90	
B	.165	.185	4.20	4.70	
C	.215	.225	5.50	5.70	
D	.235	.250	6.00	6.40	

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	25 A	$T_C = 150^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	400A	8.3ms, Halfsine
Maximum Instantaneous Forward Voltage *	V_F	1.1V	$I_{FM} = 25\text{A};$ $T_J = 25^{\circ}\text{C}$
Maximum Instantaneous DC Reverse Current At Rated DC Blocking Voltage	I_R	10 μA 200 μA	$T_J = 25^{\circ}\text{C}$ $T_J = 150^{\circ}\text{C}$
Maximum thermal resistance, junction to Ambient	$R_{\theta JA}$	1.0 $^{\circ}\text{C}/\text{W}$	
Typical Junction Capacitance	C_j	300pF	Measured at 1.0MHz, $V_R = 4.0\text{V}$

*Pulse Test: Pulse Width 300 usec, Duty Cycle 2%



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

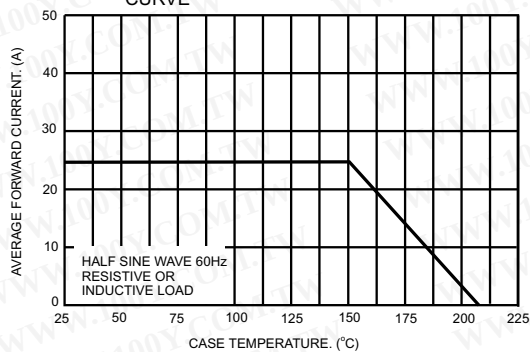


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

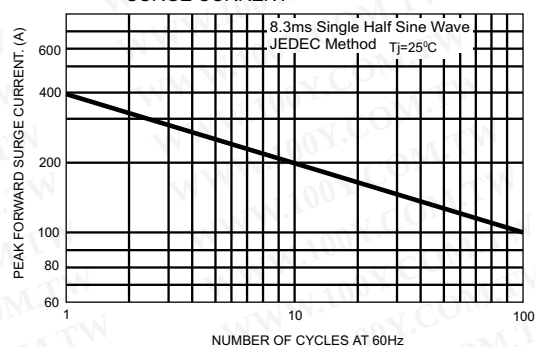


FIG.3- TYPICAL FORWARD CHARACTERISTICS

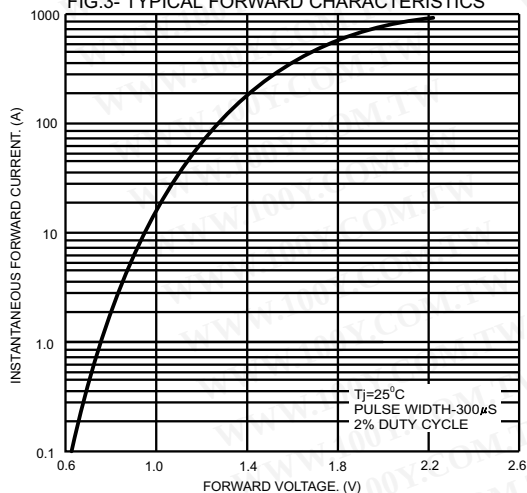


FIG.4- TYPICAL REVERSE CHARACTERISTICS


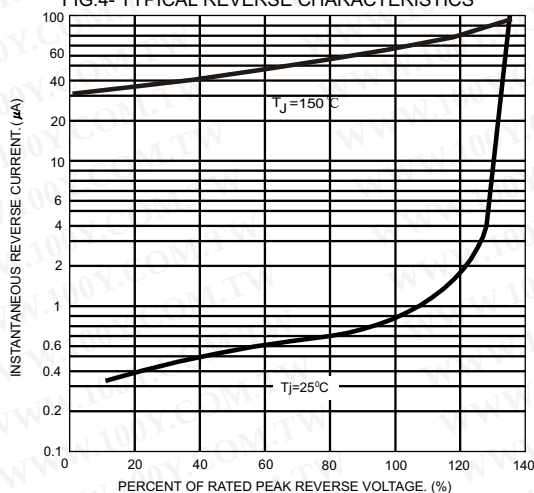


FIG.5- TYPICAL JUNCTION CAPACITANCE

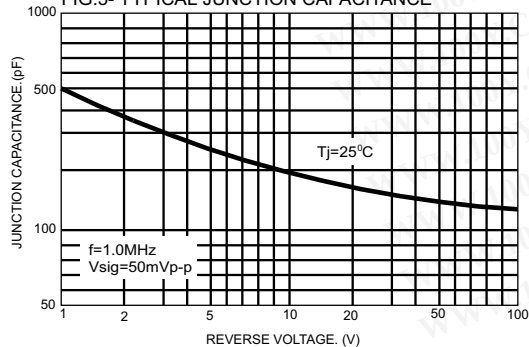

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)