



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

**AR(S)3501G
 THRU
 AR(S)3507G**

AUTOMOTIVE GLASS PASSIVATED RECTIFIERS TYPE 35A

Features


- High Surge Capability
- High Current Capability
- Types up to 1000V V_{RRM}

**35Amp
 BUTTON DIODE
 50-1000 Volts**

Maximum Ratings

Operating Temperature: -50°C to $+215^{\circ}\text{C}$
 Storage Temperature: -50°C to $+215^{\circ}\text{C}$


BUTTON-AR

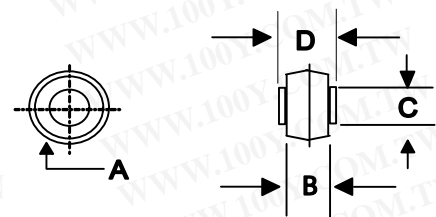

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
AR(S)3501G	50V	35V	50V
AR(S)3502G	100V	70V	100V
AR(S)3503G	200V	140V	200V
AR(S)3504G	400V	280V	400V
AR(S)3505G	600V	420V	600V
AR(S)3506G	800V	560V	800V
AR(S)3507G	1000V	700V	1000V

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.380	.410	9.7	10.4	
B	.165	.185	4.20	4.70	
C	.215	.225	5.50	5.70	
D	.235	.250	6.00	6.40	

BUTTON-ARS

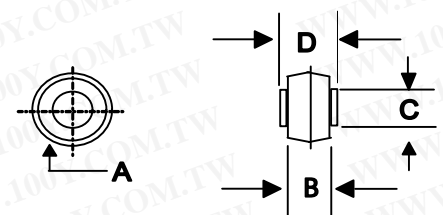

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.327	.347	8.30	8.90	
B	.165	.185	4.20	4.70	
C	.215	.225	5.50	5.70	
D	.235	.250	6.00	6.40	

Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	35 A	$T_C = 150^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	500A	8.3ms, Halfsine
Maximum Instantaneous Forward Voltage *	V_F	1.1V	$I_{FM} = 35A$; $T_J = 25^{\circ}\text{C}$
Maximum Instantaneous DC Reverse Current At Rated DC Blocking Voltage	I_R	10 uA 200 uA	$T_J = 25^{\circ}\text{C}$ $T_J = 150^{\circ}\text{C}$
Maximum thermal resistance, junction to Ambient	$R_{\theta JA}$	1.0 $^{\circ}\text{C}/\text{W}$	
Typical Junction Capacitance	C_j	300pF	Measured at 1.0MHz, $V_R = 4.0V$

*Pulse Test: Pulse Width 300 usec, Duty Cycle 2%



AR(S)3501G THRU AR(S)3507G

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

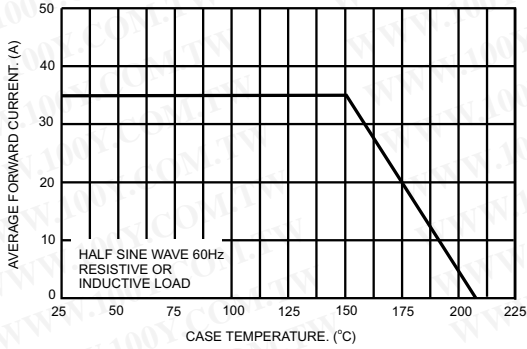


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

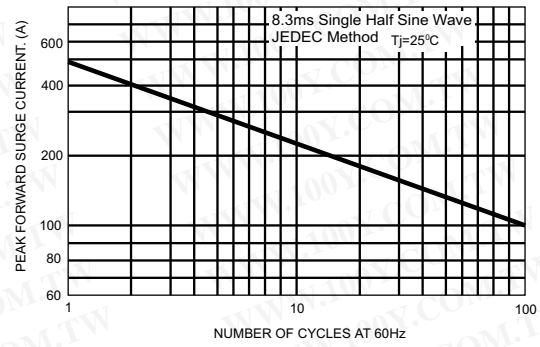


FIG.3- TYPICAL FORWARD CHARACTERISTICS

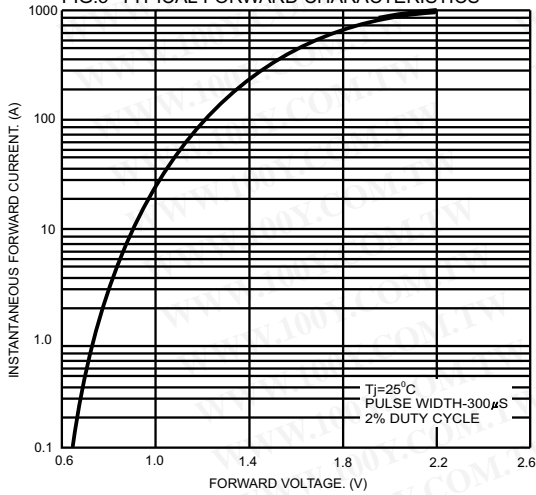


FIG.4- TYPICAL REVERSE CHARACTERISTICS

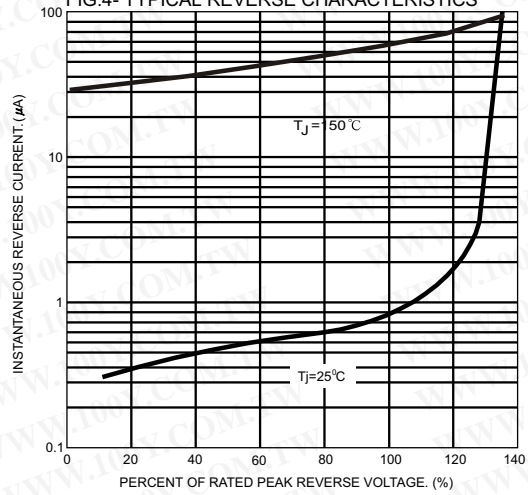


FIG.5- TYPICAL JUNCTION CAPACITANCE

