


High Voltage MLC Radials (SV Style)



Application Information on High Voltage MLC Capacitors

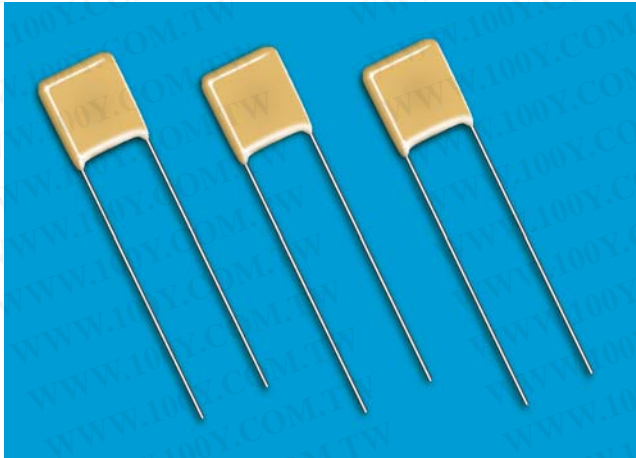

High value, low leakage and small size are difficult parameters to obtain in capacitors for high voltage systems. AVX special high voltage MLC radial leaded capacitors meet these performance characteristics. The added advantage of these capacitors lies in special internal design minimizing the electric field stresses within the MLC. These special design criteria result in significant reduction of partial discharge activity within the dielectric and having, therefore, a major impact on long-term reliability of the product. The SV high voltage radial capacitors are conformally coated with high insulation resistance, high dielectric strength epoxy eliminating the possibility of arc flashover.

The SV high voltage radial MLC designs exhibit low ESRs at high frequency. The same criteria governing the high voltage design carries the added benefits of extremely low ESR in relatively low capacitance and small packages. These capacitors are designed and are ideally suited for applications such as snubbers in high frequency power converters, resonators in SMPS, and high voltage coupling/DC blocking.

COG Dielectric General Specifications

Capacitance Range

10 pF to .15 μ F
(+25°C, 1.0 \pm 0.2 Vrms at 1kHz,
for \leq 100 pF use 1 MHz)

Capacitance Tolerances

\pm 5%; \pm 10%; \pm 20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

0 \pm 30 ppm/°C

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

0.15% max.
(+25°C, 1.0 \pm 0.2 Vrms at 1kHz,
for \leq 100 pF use 1 MHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min. or 1000 M Ω - μ F min.,
whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min.,
whichever is less

Dielectric Strength

120% rated voltage, 5 seconds

Life Test

100% rated and +125°C

X7R Dielectric General Specifications

Capacitance Range

100 pF to 2.2 μ F
(+25°C, 1.0 \pm 0.2 Vrms at 1kHz)

Capacitance Tolerances

\pm 10%; \pm 20%; +80%, -20%

Operating Temperature Range

-55°C to +125°C

Temperature Characteristic

\pm 15% (0 VDC)

Voltage Ratings

1000 VDC thru 5000 VDC (+125°C)

Dissipation Factor

2.5% max.
(+25°C, 1.0 \pm 0.2 Vrms at 1kHz)

Insulation Resistance (+25°C, at 500V)

100K M Ω min., or 1000 M Ω - μ F min.,
whichever is less

Insulation Resistance (+125°C, at 500V)

10K M Ω min., or 100 M Ω - μ F min.,
whichever is less

Dielectric Strength

120% rated voltage, 5 seconds


Life Test

100% rated and +125°C



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

High Voltage MLC Radials (SV Style)

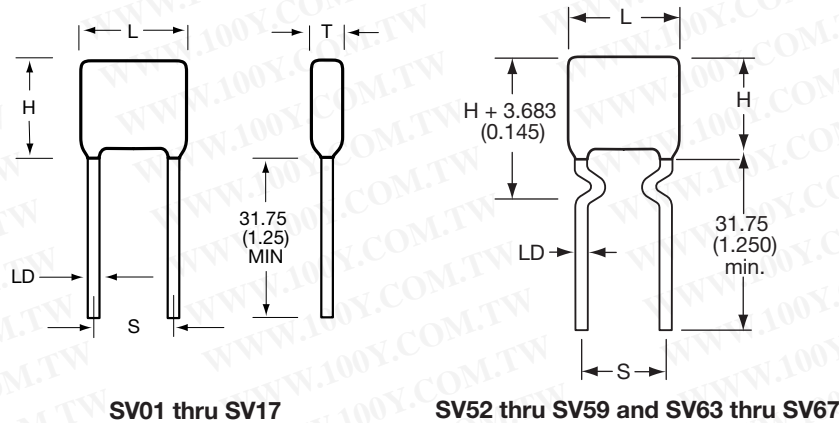

HIGH VOLTAGE RADIAL LEAD HOW TO ORDER

AVX Styles: SV01 THRU SV16

| | | | | | | | |
|---|---|--------------------------------|--|---|-----------------------------|--------------|------------------|
| SV01 | A | A | 102 | K | A | A | * |
| AVX Style | Voltage | Temperature Coefficient | Capacitance Code | Capacitance Tolerance | Test Level | Leads | Packaging |
| | 1000V = A 1500V = S 2000V = G 2500V = W 3000V = H 4000V = J 5000V = K | COG = A X7R = C | (2 significant digits + no. of zeros) Examples: 10 pF = 100 100 pF = 101 1,000 pF = 102 22,000 pF = 223 220,000 pF = 224 1 μF = 105 | COG: J = ±5% K = ±10% M = ±20% X7R: K = ±10% M = ±20% Z = +80 -20% | A = Standard B = Hi-Rel* | A = Leads | (See Note 1) |
| <p>Note 1: No suffix signifies bulk packaging which is AVX standard packaging. Use suffix "TR1" if tape and reel is required. Parts are reel packaged per EIA-468.</p> | | | | | | | |

Note: Capacitors with X7R dielectrics are not intended for applications across AC supply mains or AC line filtering with polarity reversal. Contact plant for recommendations.

*Hi-Rel screening consists of 100% Group A, Subgroup 1 per MIL-PRF-49467. (Except partial discharge testing is not performed and DWV is at 120% rated voltage).

DIMENSIONS

millimeters (inches)

| AVX Style | Length (L) max | Height (H) max | Thickness (T) max | Lead Spacing ±.762 (.030) (S) | LD (Nom) |
|-----------|----------------|----------------|-------------------|-------------------------------|--------------|
| SV01 | 6.35 (0.250) | 5.59 (0.220) | 5.08 (0.200) | 4.32 (0.170) | 0.64 (0.025) |
| SV02/SV52 | 8.13 (0.320) | 7.11 (0.280) | 5.08 (0.200) | 5.59 (0.220) | 0.64 (0.025) |
| SV03/SV53 | 9.40 (0.370) | 7.62 (0.300) | 5.08 (0.200) | 6.99 (0.275) | 0.64 (0.025) |
| SV04/SV54 | 11.4 (0.450) | 5.59 (0.220) | 5.08 (0.200) | 7.62 (0.300) | 0.64 (0.025) |
| SV05/SV55 | 11.9 (0.470) | 10.2 (0.400) | 5.08 (0.200) | 9.52 (0.375) | 0.64 (0.025) |
| SV06/SV56 | 14.0 (0.550) | 7.11 (0.280) | 5.08 (0.200) | 10.16 (0.400) | 0.64 (0.025) |
| SV07/SV57 | 14.5 (0.570) | 12.7 (0.500) | 5.08 (0.200) | 12.1 (0.475) | 0.64 (0.025) |
| SV08/SV58 | 17.0 (0.670) | 15.2 (0.600) | 5.08 (0.200) | 14.6 (0.575) | 0.64 (0.025) |
| SV09/SV59 | 19.6 (0.770) | 18.3 (0.720) | 5.08 (0.200) | 17.1 (0.675) | 0.64 (0.025) |
| SV10 | 26.7 (1.050) | 12.7 (0.500) | 5.08 (0.200) | 22.9 (0.900) | 0.64 (0.025) |
| SV11 | 31.8 (1.250) | 15.2 (0.600) | 5.08 (0.200) | 27.9 (1.100) | 0.64 (0.025) |
| SV12 | 36.8 (1.450) | 18.3 (0.720) | 5.08 (0.200) | 33.0 (1.300) | 0.64 (0.025) |
| SV13/SV63 | 7.62 (0.300) | 9.14 (0.360) | 5.08 (0.200) | 5.08 (0.200) | 0.51 (0.020) |
| SV14/SV64 | 10.2 (0.400) | 11.7 (0.460) | 5.08 (0.200) | 5.08 (0.200) | 0.51 (0.020) |
| SV15/SV65 | 12.7 (0.500) | 14.2 (0.560) | 5.08 (0.200) | 10.2 (0.400) | 0.64 (0.025) |
| SV16/SV66 | 22.1 (0.870) | 16.8 (0.660) | 5.08 (0.200) | 20.1 (0.790) | 0.81 (0.032) |
| SV17/SV67 | 23.6 (0.930) | 19.8 (0.780) | 6.35 (0.250) | 20.3 (0.800) | 0.81 (0.032) |

| TAPE & REEL QUANTITY | |
|----------------------|--------|
| Part | Pieces |
| SV01/SV51 | 1000 |
| SV02/SV52 | 1000 |
| SV03/SV53 | 1000 |
| SV04/SV54 | 1000 |
| SV05/SV55 | 1000 |
| SV06/SV56 | 500 |
| SV07/SV57 | 500 |
| SV08/SV58 | 500 |
| SV09/SV59 | 500 |
| SV10 | 400 |
| SV11 | 400 |
| SV12 | 300 |
| SV13/SV63 | 1000 |
| SV14/SV64 | 1000 |
| SV15/SV65 | 500 |
| SV16/SV66 | 500 |
| SV17/SV67 | 400 |



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

High Voltage MLC Radials (SV Style)



CAPACITANCE VALUE

| C0G | | | | | | | |
|-----------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Style | 1000V min./max. | 1500V min./max. | 2000V min./max. | 2500V min./max. | 3000V min./max. | 4000V | 5000V |
| SV01 | 100 pF / 1000 pF | 10 pF / 330 pF | 10 pF / 180 pF | 10 pF / 120 pF | 10 pF / 82 pF | — | — |
| SV02/SV52 | 100 pF / 3300 pF | 100 pF / 1200 pF | 10 pF / 680 pF | 10 pF / 470 pF | 10 pF / 270 pF | 10 pF / 150 pF | 10 pF / 100 pF |
| SV03/SV53 | 100 pF / 5600 pF | 100 pF / 2200 pF | 100 pF / 1200 pF | 10 pF / 820 pF | 10 pF / 470 pF | 10 pF / 270 pF | 10 pF / 180 pF |
| SV04/SV54 | 100 pF / 2200 pF | 10 pF / 820 pF | 10 pF / 470 pF | 10 pF / 270 pF | 10 pF / 180 pF | 10 pF / 100 pF | 10 pF / 68 pF |
| SV05/SV55 | 1000 pF / 0.015 μF | 100 pF / 5600 pF | 100 pF / 3300 pF | 100 pF / 2200 pF | 100 pF / 1200 pF | 10 pF / 680 pF | 10 pF / 470 pF |
| SV06/SV56 | 100 pF / 6800 pF | 100 pF / 2700 pF | 100 pF / 1500 pF | 10 pF / 820 pF | 10 pF / 560 pF | 10 pF / 330 pF | 10 pF / 220 pF |
| SV07/SV57 | 1000 pF / 0.027 μF | 1000 pF / 0.012 μF | 100 pF / 5600 pF | 100 pF / 3900 pF | 100 pF / 2200 pF | 100 pF / 1200 pF | 10 pF / 820 pF |
| SV08/SV58 | 1000 pF / 0.039 μF | 1000 pF / 0.018 μF | 1000 pF / 0.01 μF | 100 pF / 6800 pF | 100 pF / 3900 pF | 100 pF / 2200 pF | 100 pF / 1500 pF |
| SV09/SV59 | 1000 pF / 0.068 μF | 1000 pF / 0.027 μF | 1000 pF / 0.015 μF | 1000 pF / 0.010 μF | 100 pF / 6800 pF | 100 pF / 3900 pF | 100 pF / 2700 pF |
| SV10 | 1000 pF / 0.056 μF | 1000 pF / 0.022 μF | 1000 pF / 0.012 μF | 100 pF / 8200 pF | 100 pF / 5600 pF | 100 pF / 3300 pF | 100 pF / 2200 pF |
| SV11 | 1000 pF / 0.082 μF | 1000 pF / 0.039 μF | 1000 pF / 0.022 μF | 1000 pF / 0.015 μF | 100 pF / 8200 pF | 100 pF / 4700 pF | 100 pF / 3300 pF |
| SV12 | 0.01 μF / 0.15 μF | 1000 pF / 0.056 μF | 1000 pF / 0.033 μF | 1000 pF / 0.022 μF | 1000 pF / 0.015 μF | 100 pF / 8200 pF | 100 pF / 5600 pF |
| SV13/SV63 | 100 pF / 8200 pF | 100 pF / 3300 pF | 100 pF / 1800 pF | 100 pF / 1200 pF | 100 pF / 820 pF | 10 pF / 390 pF | 10 pF / 270 pF |
| SV14/SV64 | 1000 pF / 0.015 μF | 100 pF / 6800 pF | 100 pF / 4700 pF | 100 pF / 2700 pF | 100 pF / 1500 pF | 10 pF / 820 pF | 10 pF / 560 pF |
| SV15/SV65 | 1000 pF / 0.033 μF | 1000 pF / 0.015 μF | 100 pF / 0.01 μF | 100 pF / 5600 pF | 100 pF / 2700 pF | 100 pF / 1800 pF | 100 pF / 1200 pF |
| SV16/SV66 | 1000 pF / 0.068 μF | 1000 pF / 0.027 μF | 1000 pF / 0.018 μF | 1000 pF / 0.010 μF | 100 pF / 6800 pF | 100 pF / 3900 pF | 100 pF / 2700 pF |
| SV17/SV67 | 1000 pF / 0.10 μF | 1000 pF / 0.056 μF | 1000 pF / 0.039 μF | 1000 pF / 0.022 μF | 1000 pF / 0.012 μF | 100 pF / 6800 pF | 100 pF / 4700 pF |
| X7R | | | | | | | |
| SV01 | 1000 pF / 0.012 μF | 100 pF / 3900 pF | 100 pF / 1500 pF | — | — | — | — |
| SV02/SV52 | 1000 pF / 0.047 μF | 1000 pF / 0.015 μF | 100 pF / 5600 pF | 100 pF / 3900 pF | 100 pF / 2700 pF | — | — |
| SV03/SV53 | 1000 pF / 0.082 μF | 1000 pF / 0.018 μF | 1000 pF / 0.01 μF | 100 pF / 6800 pF | 100 pF / 4700 pF | 100 pF / 1800 pF | — |
| SV04/SV54 | 1000 pF / 0.033 μF | 100 pF / 6800 pF | 100 pF / 3900 pF | 100 pF / 2200 pF | 100 pF / 1800 pF | 100 pF / 820 pF | — |
| SV05/SV55 | 0.01 μF / 0.22 μF | 1000 pF / 0.056 μF | 1000 pF / 0.027 μF | 1000 pF / 0.018 μF | 1000 pF / 0.012 μF | 100 pF / 4700 pF | — |
| SV06/SV56 | 0.01 μF / 0.10 μF | 1000 pF / 0.033 μF | 1000 pF / 0.012 μF | 100 pF / 8200 pF | 100 pF / 6800 pF | 100 pF / 2700 pF | 100 pF / 1200 pF |
| SV07/SV57 | 0.01 μF / 0.39 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.047 μF | 1000 pF / 0.033 μF | 1000 pF / 0.027 μF | 1000 pF / 0.01 μF | 100 pF / 6800 pF |
| SV08/SV58 | 0.01 μF / 0.68 μF | 0.01 μF / 0.18 μF | 1000 pF / 0.082 μF | 1000 pF / 0.068 μF | 1000 pF / 0.047 μF | 1000 pF / 0.018 μF | 1000 pF / 0.012 μF |
| SV09/SV59 | 0.10 μF / 1.00 μF | 0.01 μF / 0.27 μF | 0.01 μF / 0.12 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.068 μF | 1000 pF / 0.027 μF | 1000 pF / 0.018 μF |
| SV10 | 0.01 μF / 0.82 μF | 0.01 μF / 0.22 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.082 μF | 1000 pF / 0.056 μF | 1000 pF / 0.022 μF | 1000 pF / 0.018 μF |
| SV11 | 0.10 μF / 1.2 μF | 0.01 μF / 0.39 μF | 0.01 μF / 0.18 μF | 0.01 μF / 0.15 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.039 μF | 1000 pF / 0.027 μF |
| SV12 | 0.10 μF / 2.20 μF | 0.01 μF / 0.56 μF | 0.01 μF / 0.27 μF | 0.01 μF / 0.22 μF | 0.01 μF / 0.15 μF | 1000 pF / 0.056 μF | 1000 pF / 0.033 μF |
| SV13/SV63 | 0.01 μF / 0.10 μF | 1000 pF / 0.033 μF | 1000 pF / 0.012 μF | 1000 pF / 0.01 μF | 100 pF / 6800 pF | 100 pF / 2700 pF | — |
| SV14/SV64 | 0.01 μF / 0.18 μF | 1000 pF / 0.068 μF | 1000 pF / 0.022 μF | 1000 pF / 0.018 μF | 1000 pF / 0.015 μF | 100 pF / 5600 pF | — |
| SV15/SV65 | 0.01 μF / 0.27 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.033 μF | 1000 pF / 0.027 μF | 1000 pF / 0.022 μF | 1000 pF / 8200 pF | 100 pF / 4700 pF |
| SV16/SV66 | 0.01 μF / 1.0 μF | 0.01 μF / 0.27 μF | 0.01 μF / 0.12 μF | 0.01 μF / 0.10 μF | 1000 pF / 0.068 μF | 1000 pF / 0.027 μF | 1000 pF / 0.018 μF |
| SV17/SV67 | 0.01 μF / 1.2 μF | 0.01 μF / 0.39 μF | 0.01 μF / 0.15 μF | 0.01 μF / 0.12 μF | 1000 pF / 0.082 μF | 1000 pF / 0.039 μF | 1000 pF / 0.027 μF |

Note: Contact factory for other voltage ratings or values.

AVX IS QUALIFIED TO THE FOLLOWING DSCC DRAWINGS

| Specification # | Description | Capacitance Range |
|-----------------|--------------|-------------------|
| 87046 | C0G-1000 VDC | 10 pF - 0.025 μF |
| 87043 | X7R-1000 VDC | 100 pF - 0.47 μF |
| 87040 | X7R-2000 VDC | 100 pF - 0.22 μF |
| 87114 | C0G-3000 VDC | 10 pF - 8200 pF |
| 87047 | X7R-3000 VDC | 100 pF - 0.1 μF |
| 87076 | C0G-4000 VDC | 10 pF - 6800 pF |
| 89044 | X7R-4000 VDC | 100 pF - 0.056 μF |
| 87077 | C0G-5000 VDC | 10 pF - 5600 pF |
| 87070 | X7R-5000 VDC | 100 pF - 0.033 μF |

These specifications require group A and B testing per MIL-PRF-49467



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)