


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EDGE CARD CONNECTOR 3.96mm(0.156")/LWS 印刷板插座

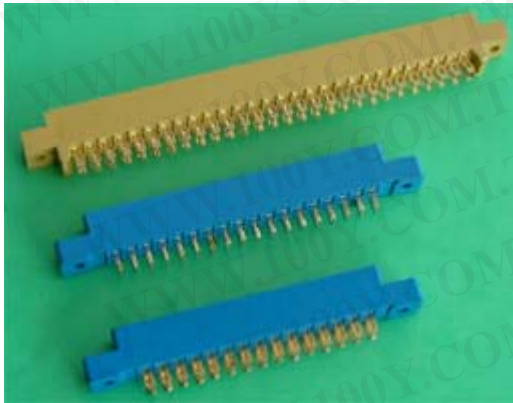

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Phosphor Bronze
 Plating: Gold plated: 1u" over 50u" nickel.

Electrical Characteristics:







Current Rating: 5 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -55°C~+105°C

Features:

*Pin counts for 12~72 leads

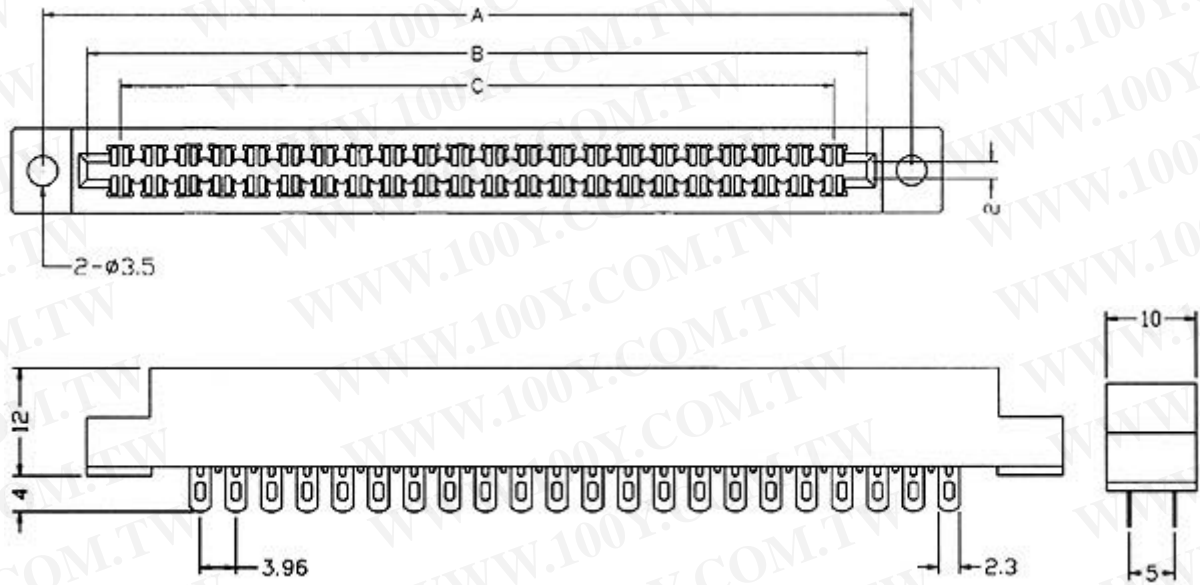

Position	12 Thru 72
Dimension	
A±0.20	3.96xNo.of Positions+18
B±0.15	3.96xNo.of Positions +8
C±0.15	3.96xNo.of Position -3.96

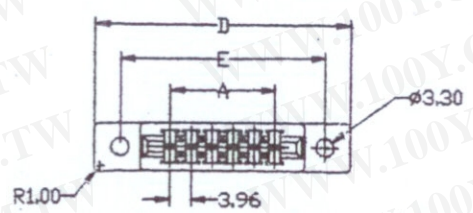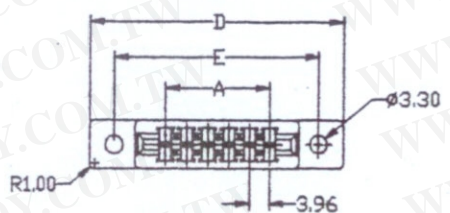

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PART NO.	DIMENSION				
	A	B	C	D	E
S6A2G	19.80	31.20	28.20	48.30	38.80
S10A2G	35.64	47.00	44.00	64.20	54.70
S12A2G	43.56	55.00	52.00	72.30	62.70
S15A2G	55.44	66.80	63.80	84.00	74.50
S18A2G	67.32	78.70	75.70	95.70	86.40
S22A2G	83.16	94.50	91.60	111.54	102.30
S28A2G	106.92	118.30	115.30	135.70	126.00
S30A2G	114.84	126.72	123.35	143.65	133.92
S36A2G	138.60	150.85	147.40	166.80	158.40
S43A2G	166.32	178.50	175.14	195.20	185.75

