


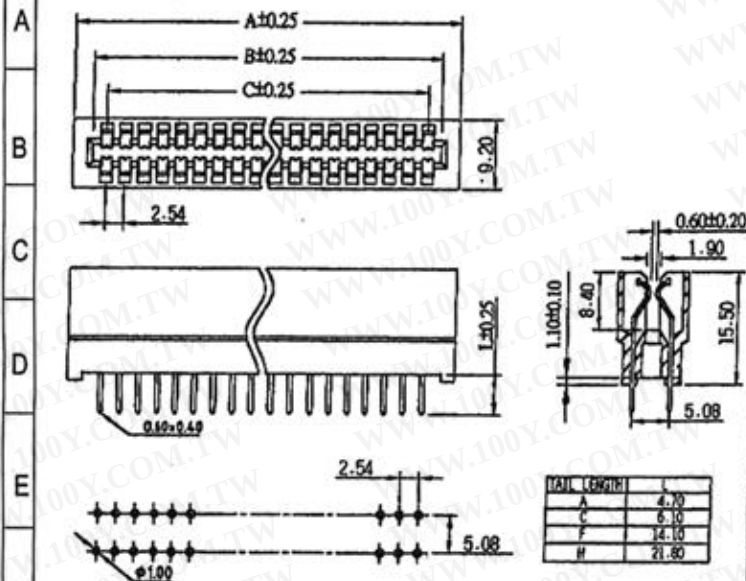

FEATURE:

INSULATOR

Glass-Filled P.B.T. 1s 94V-0 rated

CONTACT

Phosphor Bronze selective gold plating over nickel

SPECIFICATION:

Current Rating: 3 amperes

Contact Resistance: 20 miniohms max.

Operation Temperature: -55° c to 105° c

Voltage Rating: 800 VAC 1 minute

Insulation Resistance: 5000 megohms min

Insertion Force: 412 grams max. per pair

Withdrawal Force: 32 grams min. per pair

CONTACTS NO.	LEN A	LEN B	LEN C	CONTACTS NO.	LEN A	LEN B	LEN C
2/4	11.08	7.82	2.54	20/40	57.40	53.54	48.26
3/5	14.22	10.35	5.08	22/44	62.48	58.62	53.34
4/6	15.75	12.90	7.62	24/48	67.56	63.70	58.42
5/10	19.30	15.44	10.15	25/50	70.10	66.24	60.96
6/12	21.84	17.98	12.70	30/60	82.80	78.94	73.66
7/14	24.38	20.52	15.24	31/62	85.34	81.48	76.20
8/16	26.92	23.06	17.78	32/64	87.88	84.02	78.74
10/20	32.00	28.14	22.86	35/70	95.50	91.64	86.36
12/24	37.08	33.22	27.94	36/72	98.04	94.18	88.90
13/25	39.62	35.76	30.48	40/80	108.20	104.34	99.06
14/28	42.16	38.30	33.02	43/86	115.82	111.96	106.68
15/30	44.70	40.84	35.56	49/98	138.68	134.82	129.54
16/32	47.24	43.38	38.10	50/100	133.60	129.74	124.46
17/34	49.78	45.92	40.64	54/108	143.76	139.90	134.62
18/36	52.32	48.46	43.18	60/120	159.00	155.14	149.86
19/38	54.86	51.00	45.72				

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

UNIT

SCALE

PART NAME

MM

2:1

2.54mm SLOT W/O EAR

TOLERANCE

PART NO.

REV.

± 0.3

A

制表日:2003/08/26

DRAWING.

APPROVED

APPD.

CKD.