



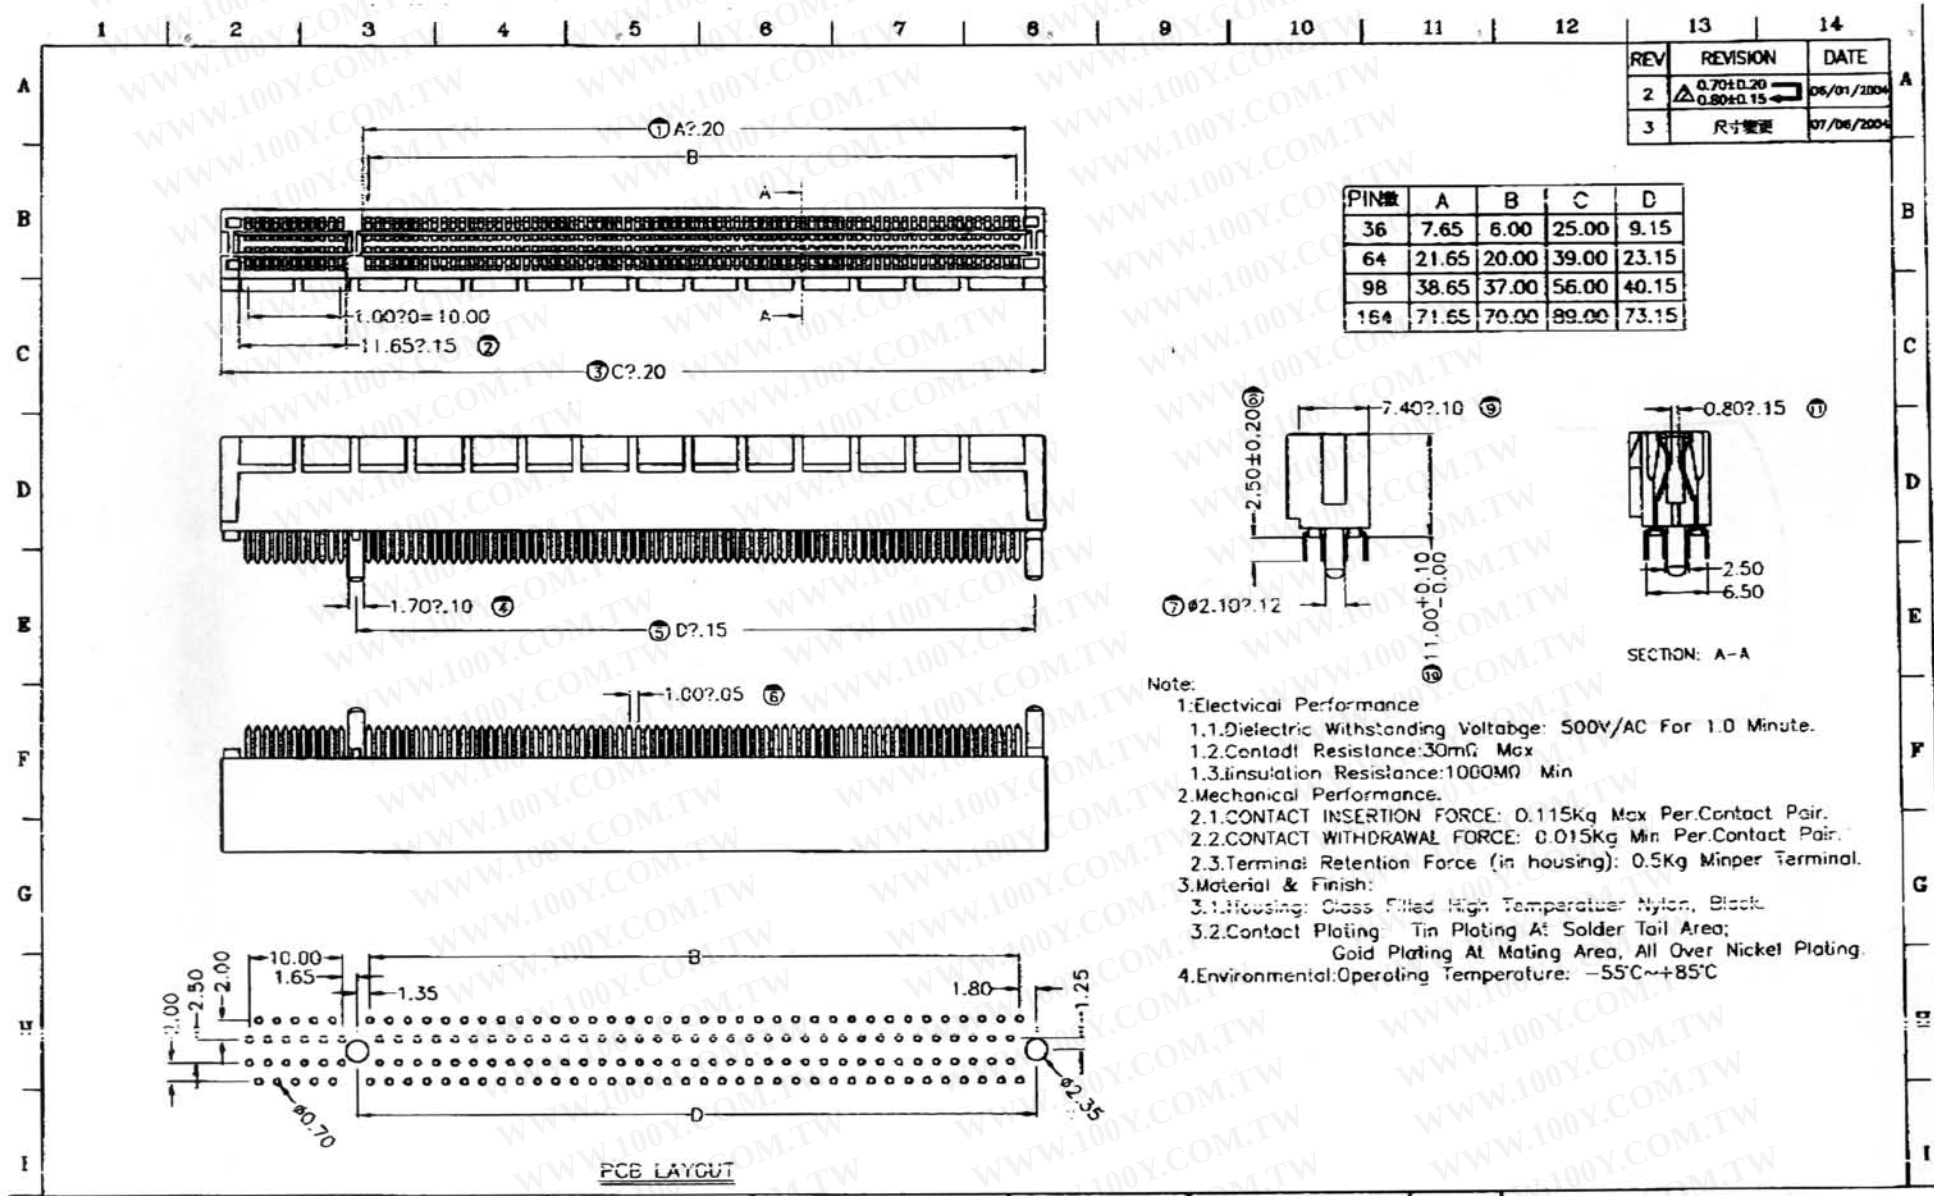

REV	REVISION	DATE
2	0.70±0.20 0.80±0.15	05/01/2004
3	尺寸變更	07/06/2004

PIN數	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

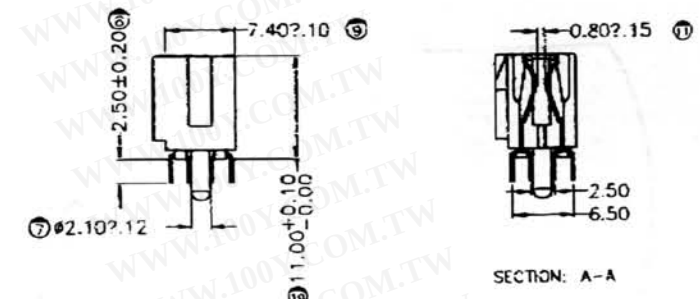

- Note:
- Electrical Performance
 - Dielectric Withstanding Voltage: 500V/AC For 1.0 Minute.
 - Contact Resistance: 30mΩ Max
 - Insulation Resistance: 1000MΩ Min
 - Mechanical Performance
 - CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.
 - CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.
 - Terminal Retention Force (in housing): 0.5Kg Minper Terminal.
 - Material & Finish
 - Housing: Glass Filled High Temperature Nylon, Black
 - Contact Plating: Tin Plating At Solder Tail Area; Gold Plating At Mating Area, All Over Nickel Plating.
 - Environmental: Operating Temperature: -55°C~+85°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

繪圖(DRAW):	未標注公差尺寸	料號 (PART NUMBER)	100 PCI - XXX	品名 (NAME):	PCI PH:1.0 產品
審核(CHECK):	METRIC 0 ±0.20 .00	圖號 (DRAW NUMBER)	CB100PCI - XXX	圖檔 (FILE NAME DWG)	D:\EG\15\Z\Y
核准(APP'D):	±0.10 .000 ±0.001	投影 (PROJECT)	材質 (MATERIAL)	比例 (SCALE)	單位 (UNITS)
			NYLON	1.3:1	mm
				版本 (REV)	3