






BH型無熔線斷路器-分電盤用


框架容量(AF)		50	100	100	50	100	
型式		BH			BHU		
外觀							
極數(P)		1	2	3	1	2	3
外型及安裝尺寸	a	25	50	75	25	50	75
	b	95					
	c	58.5					
	ca	77.5					
	bb	100					
	aa	0	25	50	0	25	50
額定電壓 V(A.C)		110/220*		220	110/220*		220
額定電流 (A) (基準周圍溫度 40°C)		10,15,20, 30,40,50	60,75 100	10,15,20,30,40,50, 60,75,100	15,20,30, 40,50	15,20,30,40,50, 60,75,100	
啟斷容量 I C : K A	100V/220V	5		--	10		--
	220V	--		5	--		10
重量(Kg)		0.15		0.31	0.46		0.2 0.4 0.6

(註) 單相三線式,線間電壓為220伏;電壓線-中性線接地間電壓為110伏

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BH, BHU 外形尺寸圖

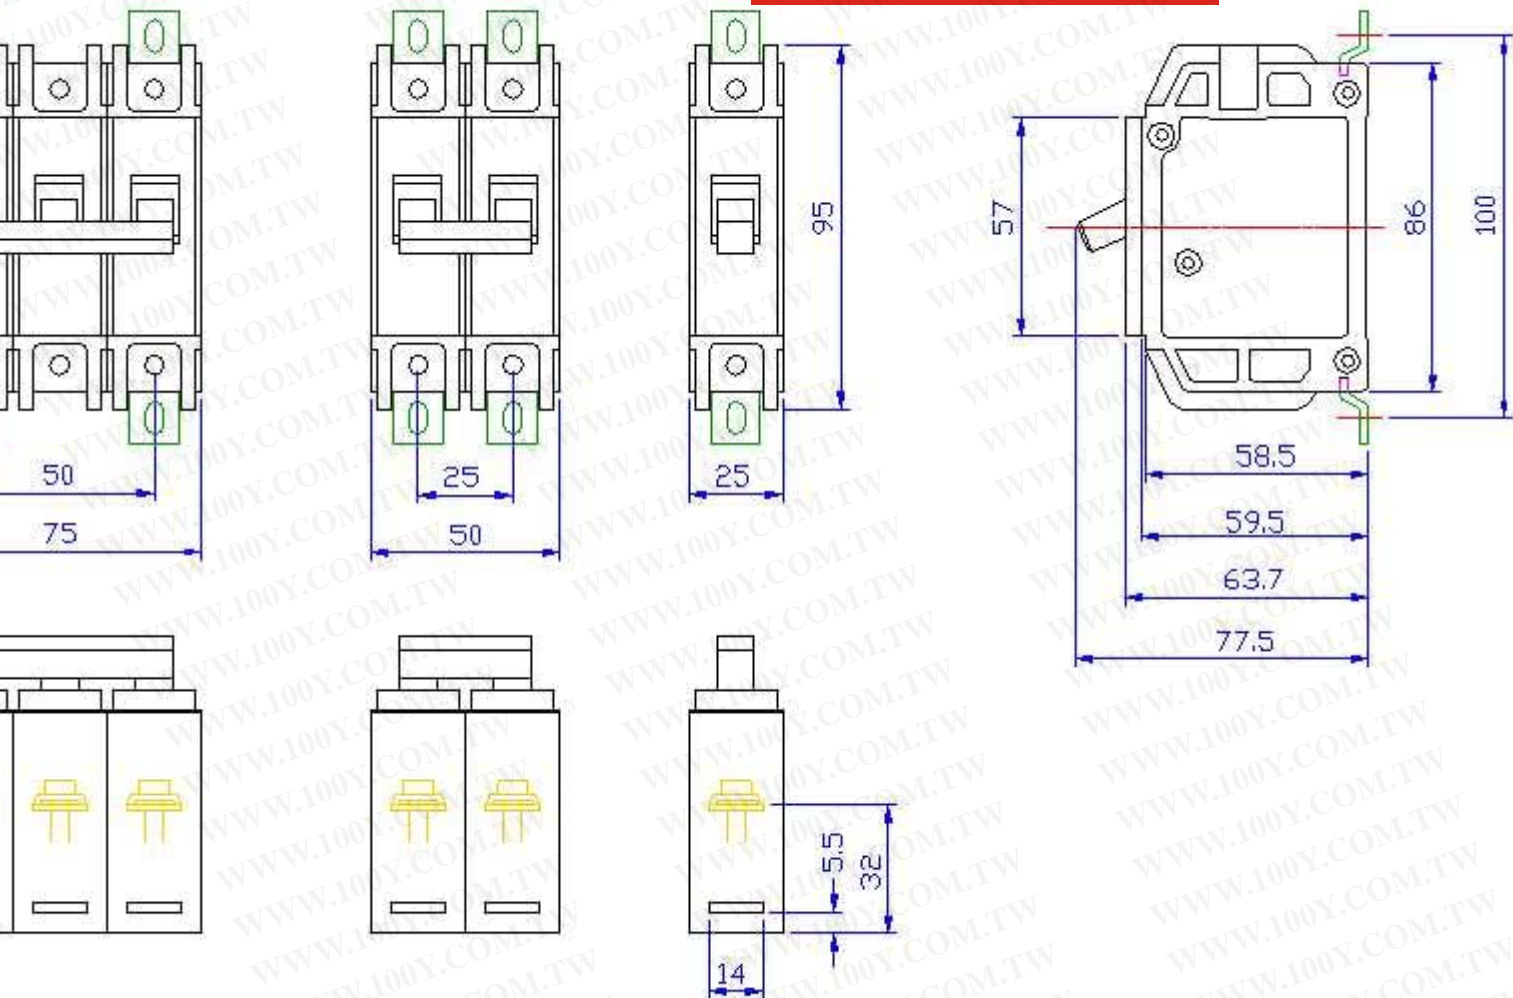

3P

2P

1P

