


Industrial HRC Fuse


74 x 212mm, BS88, IEC 269-1
Center Bolted Tags

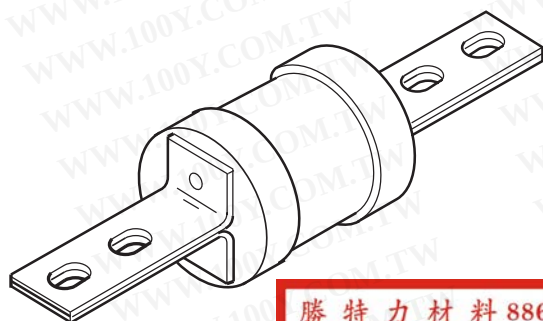


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CATALOG SYMBOL: FF
 INDUSTRIAL HRC FUSE
 CENTER BOLTED TAGS
 PACKAGE QUANTITY: 1
 80kA INTERRUPTING RATING

Dimensional Data:

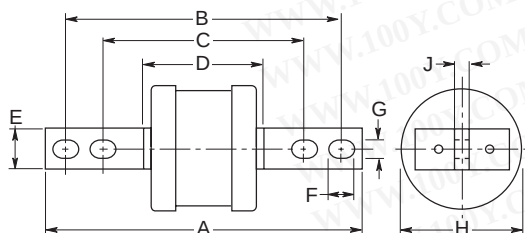

Time-Current Characteristic Curve (Full Size Curves Available)

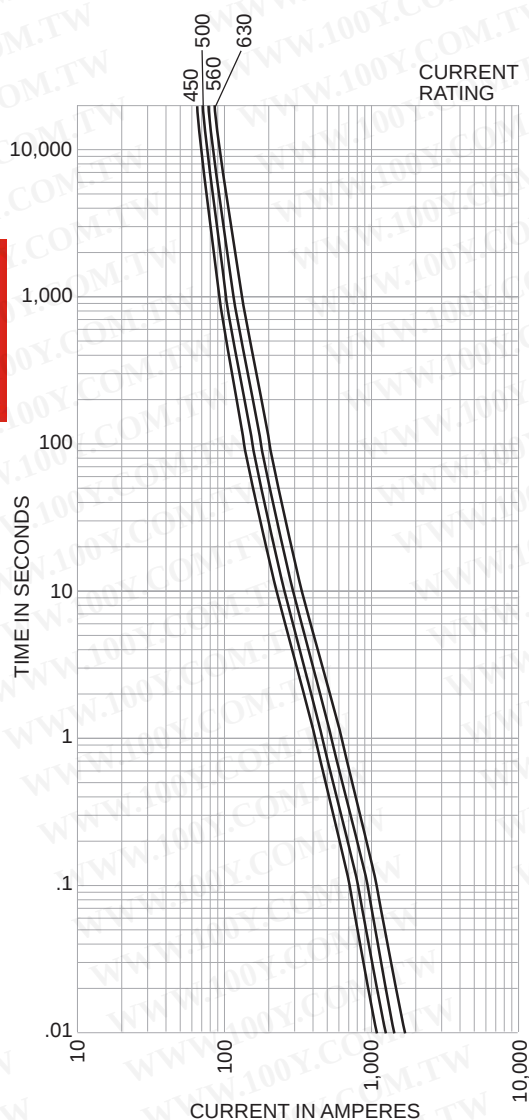

Electrical Characteristics

Catalog Number	Ampere Rating	I ² T (Amp ² Seconds x 10 ³)			Watts Loss	Nom Rated Voltage	Dimensions (Inches/mm)								
		Pre-Arcing	Total At 415V	Total At 550V			A	B	C	D	E	F	G	H	J
FF450	450	880	1600	2200	32	550AC 400DC	210.0	185.0	134.0	77.5	25.4	15.5	10.5	2.94 74.0	6.4
FF500	500	1100	2000	2800	38										
FF560	560	1400	2400	3500	43										
FF630	630	2000	3500	5000	50										

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

660/690V Centre Bolted Tag

	Part No.	Current Rating	Rated Voltage (ac)	Rated Voltage (dc)	Fixing Centres (mm)	Interrupting Rating	Box Quantity
	2K08-660	2	660 / 690	250	93	80 kA @ 660 Vac 40 kA @ 250 Vdc	20 pcs
	4K08-660	4					
	6K08-660	6					
	10K08-660	10					
	16K08-660	16					
	20K08-660	20					
	32K08-660	32					
	40K08-660	40					
	50K08-660	50					
	63K08-660	63					
勝特力材料 886-3-5753170 勝特力电子(上海) 86-21-54151736 勝特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw							
	2K09-660	2	660 / 690	250	111	80 kA @ 660 Vac 40 kA @ 250 Vdc	20 pcs
	4K09-660	4					
	6K09-660	6					
	10K09-660	10					
	16K09-660	16					
	20K09-660	20					
	32K09-660	32					
	40K09-660	40					
	50K09-660	50					
	63K09-660	63					
	80L09-660	80	660 / 690	400	111	80 kA @ 660 Vac 40 kA @ 400 Vdc	10 pcs
	100L09-660	100					
	125M09-660	125	660 / 690	400	111	80 kA @ 660 Vac 40 kA @ 400 Vdc	5 pcs
	160M09-660	160					
	200M09-660	200					
	250N09-660	250	660 / 690	400	111	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	315N09-660	315					

660/690V Centre Bolted Tag

	Part No.	Current Rating	Rated Voltage (ac)	Rated Voltage (dc)	Fixing Centres (mm)	Interrupting Rating	Box Quantity
BS Ref B4 	355P09-660	355	660 / 690	400	111	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	400P09-660	400					

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

	125N11-660	125	660 / 690	400	133	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	160N11-660	160					
	200N11-660	200					
	250N11-660	250					
	315N11-660	315					

BS Ref C1 	355P11-660	355	660 / 690	400	133 / 184	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	400P11-660	400					

BS Ref C2 	450R11-660	450	660 / 690	400	133 / 184	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	500R11-660	500					
	560R11-660	560					
	630R11-660	630					

	450R12-660	450	660 / 690	400	167 / 231	80 kA @ 660 Vac 40 kA @ 400 Vdc	1 pc
	500R12-660	500					
	560R12-660	560					
	630R12-660	630					