


7410 Series Digital Panel Meters

DIMENSION OF DPM (9/128 DIN)
unit: mm

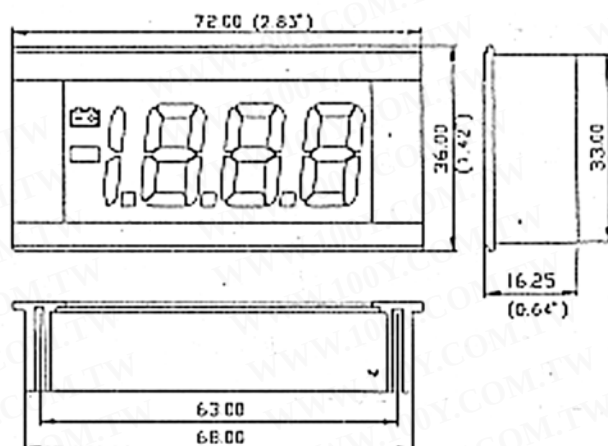

Electrical:

•DCV

Range: 200mV, 2V, 20V, 200V, 600V
Accuracy: 200mV range $\pm(0.1\% \pm 2\text{dgt})$
other ranges $\pm(0.2\% \pm 2\text{dgt})$

•ACV (@ 50Hz~500Hz)

Range: 200mV, 2V, 20V, 200V, 600V
Accuracy: 200mV range $\pm(0.2\% \pm 3\text{dgt})$
other ranges $\pm(0.3\% \pm 3\text{dgt})$
(only ACV 600V @ 50Hz-60Hz)

•DCA

Range: 200mA, 20mA, 2mA, 200uA
Accuracy: 200mA range $\pm(0.1\% \pm 2\text{dgt})$
other ranges $\pm(0.3\% \pm 2\text{dgt})$

•ACA (@ 50Hz~500Hz)

Range: 200mA, 20mA, 2mA, 200uA
Accuracy: 200mA range $\pm(0.2\% \pm 3\text{dgt})$
other ranges $\pm(0.4\% \pm 3\text{dgt})$

Specifications:

General:

- Display: 3 1/2 digit liquid crystal display (LCD) with maximum reading of 1999.
- Measurement Rate: 2.5 times per second, nominal.
- Operating Environment: 0°C to 60°C. (32°F to 140°F)
- Storage temperature: -20°C to 75°C. (-4°F to 167°F)
- Humidity: less than 75% RH.
- 12LED(LCDnegativevered backlit)

• Temperature coefficient: (0°C to 60°C) $\pm 0.15\text{dgt}/^\circ\text{C}(\text{Max.})$

• Auto-zero Reading: $\pm 1\text{dgt}$



Purchasing notes:

MODEL NUMBER

74103NN

胜特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Num(nn)	Range model	Range model
21	DCVACV 200mV to 600V	JUMP
41	DCVACA 200uA to 200mA	JUMP

Note: No backlit display for 9V supply voltage.