


CT TIMER

CTDHC3L6NL

超小型電子累計時器

CTDHC3L6NL



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- DIN48X24mm 標準面板尺寸, 可擴展成 50x60mm

- 內部自帶電源, 不須外接

- 復歸信號不應長時間接通, 以免浪費內部電池

- 累計時精度高

- LCD 顯示, 顯示大而清晰

- 面板復歸帶鎖定, 防止錯誤操作

- 無機械磨損, 壽命長

- 電源: 內部電源

- 電池壽命: ≥ 6 年

- 顯示字高: 6.7mm

- 累計時誤差: $\leq 0.002\%$







- 接點接通最大電阻 $\leq 10K\Omega$ (計數 ON)

- 接通斷開最小電阻 $\geq 500K\Omega$ (計數 OFF)

- 輸入最大殘餘電壓:0.5V
- 最小信號脈寬 ≥ 0.2 秒
- 開孔尺寸:22.2x45mm
- 復歸方式:外部端子復歸
- 使用環境溫度:-10~40℃
- DIN 48x24mm Standard Faceplate Area, can expand to 50X60mm
- Internal power source, no need for external power
- Reset signal should not be applied for a long time so that internal battery will not be wasted.
- Very accurate timer.
- LED display, large and clear.
- Reset and Lock, to prevent errors in operating
- No mechanical wear out, long lifetime
- Power: Internal power.
- Battery Life-Expectancy: ≥ 6 Years
- Number Display Height: 6.7mm
- Timer Error: $\leq 0.02\%$
- ON/OFF maximum resistance $\leq 10K\Omega$ (Counter ON).
- ON/OFF minimum resistance $\leq 500K\Omega$ (Counter OFF).
- Maximum Residual Voltage 0.5V
- Weight: Approximately 60g
- Dimension of Mounting Hole: 22.2X45mm
- Reset Method: External Button
- Operating Temperature: -10~40 Degrees Celsius

=====外型尺寸圖=====

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

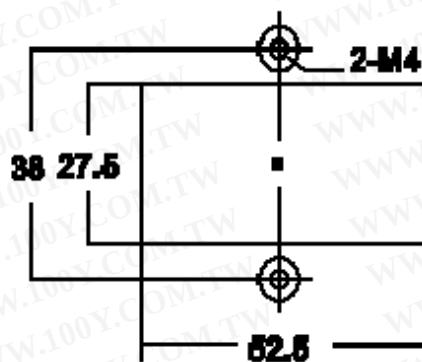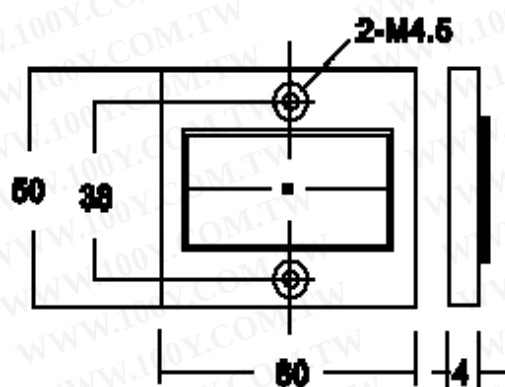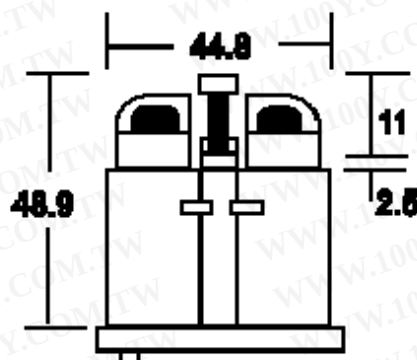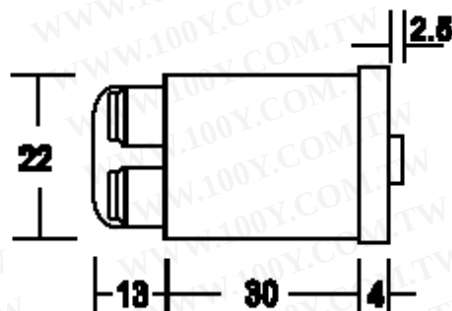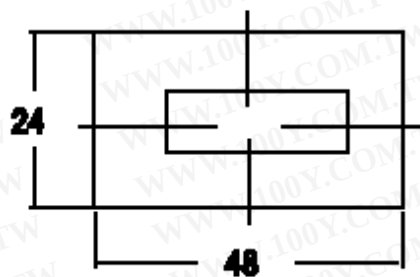

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)