


- Low Minimum Operating Current
- SCR Output
- Crydom's Patented Design

The CX241 AC Relays are 1.5A rated SPST-NO low profile SIP solid state relays offering the Series ASO circuit with the popular CXpin-out. They are designed for switching highly inductive, low current loads such as solenoids. Available in either zero voltage or random switching versions (R suffix).

Manufactured in Crydom's ISO 9001 Certified facility for optimum product performance and reliability.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CURRENT DERATING CURVE

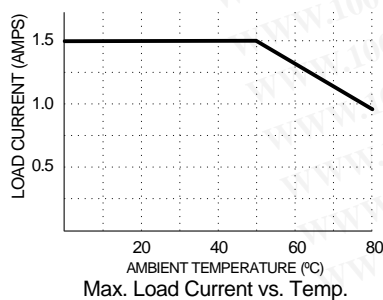


MODEL NO.	CX241	CX241R
INPUT SPECIFICATIONS ①		
Control Voltage Range	4-10 Vdc	
Nominal Input Impedance	300 Ohm	
Typical Input Current @ 5 Vdc	15 mAdc	
Must Turn On Voltage	4.0 Vdc	
Must Turn Off Voltage	1.0 Vdc	

OUTPUT SPECIFICATIONS ①		
Operating Voltage Range (47-63 Hz)	12-280 Vrms	
Load Current Range	.025-1.5 Arms	
Transient Over-Voltage	600 Vpk	
Max. Surge Current, (16.6ms)	40 Apk	
Min. Off-State dv/dt @ Max. Rated Voltage ③	500 V/μsec	
Max. Off-State Leakage @ Rated Voltage	0.1 mArms	
Max. On-State Voltage Drop @ Rated Current	1.5 Vpk	
Max. Turn-On Time	1/2 cycle	0.1 msec
Max. Turn-Off Time	1/2 cycle	
Power Factor (Min.) Wlth Max. Load	0.5	

GENERAL SPECIFICATIONS		
Dielectric Strength ②	4000 Vrms	
Insulation Resistance (Min.) @ 500 Vdc ②	10 ⁹ Ohm	
Max. Capacitance	8.0 pF	
Ambient Operating Temperature Range	-30 to 80°C	
Ambient Storage Temperature Range	-30 to 125°C	

MECHANICAL SPECIFICATIONS		
Weight: (typical)	0.4 oz. (11 g)	
Encapsulation:	Thermally Conductive Epoxy	

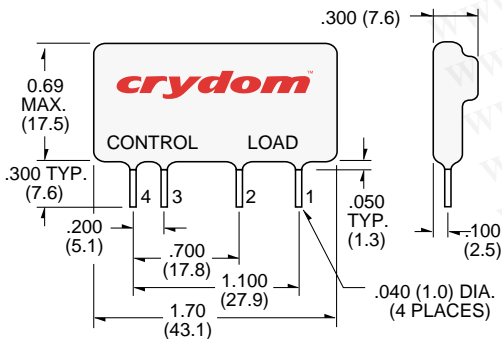

PIN 1: AC LOAD
 PIN 2: AC LOAD
 PIN 3: +DC CONTROL
 PIN 4: -DC CONTROL

All dimensions are in inches (millimeters)

© 2003 CRYDOM CORP, Specifications subject to change without notice.

GENERAL NOTES

- ① All parameters at 25°C unless otherwise specified.
- ② Dielectric and insulation resistance are measured between input and output.
- ③ Off-State dv/dt test method per EIA/NARM standard RS-443.

APPROVALS

UL E116950
 CSA LR81689
 VDE 5921 UG



FastFax Document No.105

SERIES CX241
 Rev. 111203
 PAGE 1 OF 1

For recommended applications and more information contact:

USA: Sales Support (877) 502-5500 Tech Support (877) 702-7700 FAX (619) 710-8540

Crydom Corp, 2320 Paseo de las Americas, Ste. 201, San Diego, CA 92154

Email: sales@crydom.com WEB SITE: <http://www.crydom.com>

UK: +44 (0)1202 365070 • FAX +44 (0)1202 365090 Crydom International Ltd., 7 Cobham

Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7PE, Email: intsales@crydom.com.

GERMANY: +49 (0)180 3000 506

