


2.54mm IDC Socket

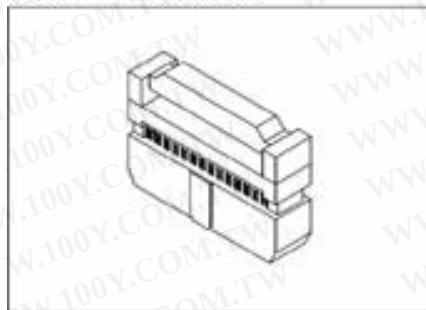

SPECIFICATIONS:

Current rating: 1.0A AC, DC

Voltage rating: 50V AC, DC

Contact resistance: 20mΩ max

Insulation resistance: 500MΩ min

Withstanding voltage: 500V AC/minute





Temperature range: -25℃ to +125℃

MATERIAL:

Insulator: Polyester UL94V-0

Contact: Phosphor Bronze

Finish: Tin Plated

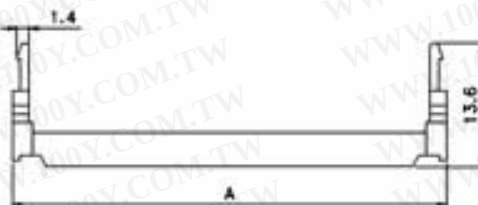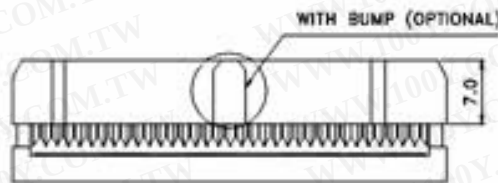

CIRCUITS	DIM. A	DIM. B	CIRCUITS	DIM. A	DIM. B
6	12.18	5.08	26	37.70	30.48
8	14.72	7.62	30	42.70	35.56
10	17.40	10.16	34	47.84	40.64
12	19.80	12.70	40	55.58	48.26
14	22.45	15.24	50	68.14	60.96
16	25.08	17.78	60	81.04	73.66
20	30.20	22.86	64	85.84	78.74
24	35.04	27.94			

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)