


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

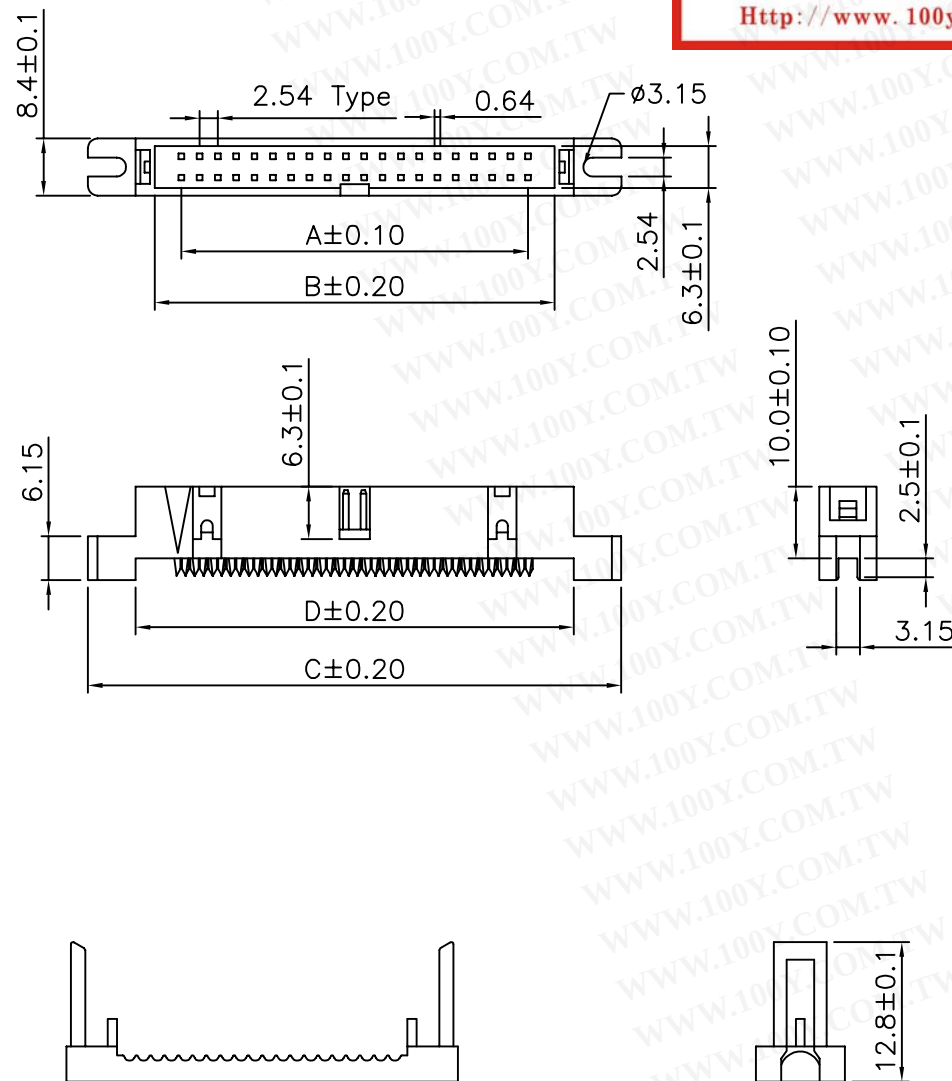

SPECIFICATIONS:

Current Rating: 1A

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Insulation Resistance: 1000 Megohms Min.At DC 500V

Contact Resistance:30 Milliohms Max.

Operating Temperature: -55°C To +105°C

Contact:Brass,Gold Flash

Insulator:PBT+30% Glass Fiber(UL 94V-0),Gray

Position	A	B	C	D
10	10.16	18.00	37.20	23.00
14	15.24	23.08	42.28	28.08
16	17.78	25.62	44.82	60.62
20	22.86	30.70	49.90	35.70
24	27.94	35.78	54.98	40.78
26	30.48	38.32	57.52	43.32
30	35.58	43.40	62.60	48.40
34	40.64	48.48	67.68	53.48
40	48.26	56.10	75.30	61.10
50	60.96	68.80	88.00	73.80
60	73.66	81.50	100.70	86.50
64	78.74	86.58	105.7	91.58