

2.54MM PIN HEADER STRAIGHT TYPE

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP




Insulation Resistance : 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature : -55°C to +105°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

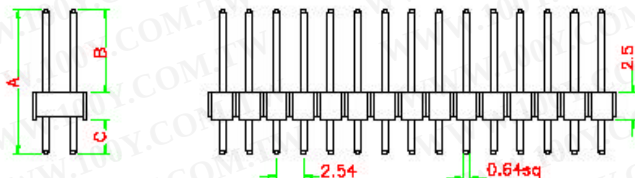

Recommended P.C.B. Layout

UNIT : mm

圖名 MOLD NAME		2.54MM PIN HEADER STRAIGHT TYPE		
圖號 DRAWING NO.			比例 SCALE	2 : 1
公差 TOLERANCE	±0.2	繪圖 DRAW BY	日期 DATE	011218