

2.54MM FEMALE HEADER LOW PROFILE:8.4MM

MATERIAL

INSULATOR : 30% Glass fiber PBT

CONTACT PIN : Brass

SPECIFICATION

CURRENT RATE : 1 AMP

INSULATION RESISTANCE : 5000MΩ Min.




CONTACT RESISTANCE : 30mΩ Max.

DIELECTRIC VOLTAGE : 500V AC for one minute

OPERATION TEMPERATURE : -55°C to +105°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- 1: Single row
- 2: Dual rows
- 3: G: Gold flash
S: Selective
T: Tin plated
- 4: B: Black Insulator

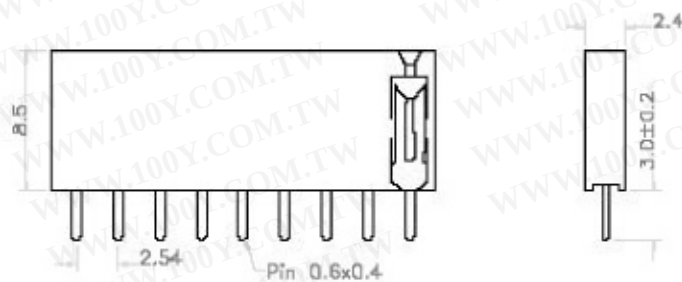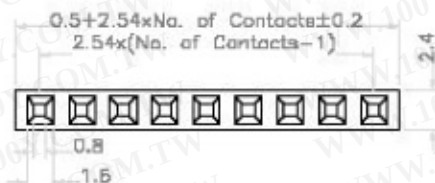

Recommended P.C.B. Layout

UNIT : mm

圖名		2.54MM FEMALE HEADER LOW PROFILE 8.4MM		
圖號				比例
DRAWING NO.				SCALE
公差	±0.2	繪圖	日期	011029
TOLERANCE		DRAW BY	DATE	