

F

E

D





C

B

A

12345678

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

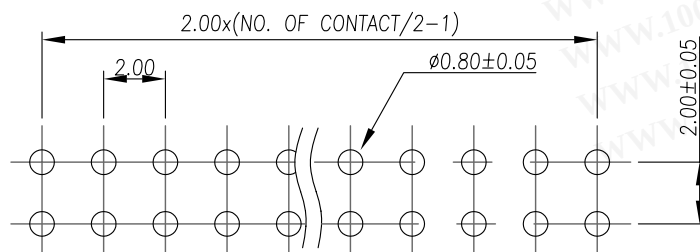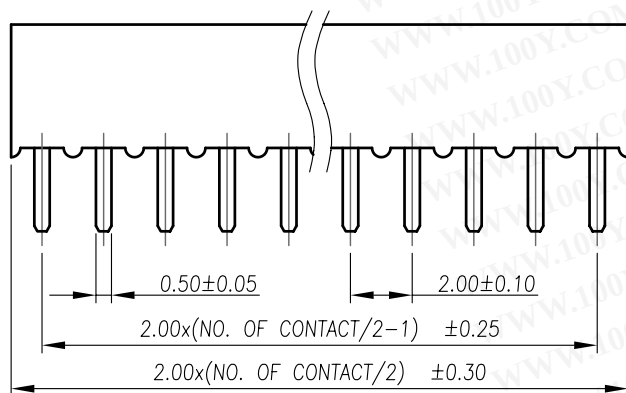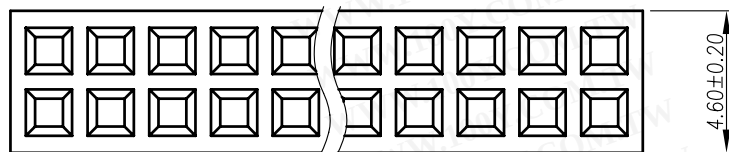

P.C.B. LAYOUT

NOTE:

SPECIFICATION

- 1.Current Rating: 1A
- 2.Withstanding Voltage: 500 VAC (1 Minute)
- 3.Insulation Resistance: 1000 Megohms Min.
- 4.Contact Resistance: 30 Milliohms Max.
- 5.Operating Temperature: -55°C to +105°
- 6.Retention Force: 450g Min.

MATERIAL

- 1.Contact: Phosphor Bronze
- 2.Insulator: PBT & 30% G.F.
- 3.Plated: Gold Flash

ORDER INFORMATION

FPHSI-2 XX 01B031

NO. OF CONTACT

DIMENSION IN mm [Inch]		PROD. SPEC.	C	
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC.	TITLE FEMALE HEADER 2.00mm D/R DIP	
.X±0.30	X.*± 1°	APPROVE	CUSTOMER DRAWING	
.XX±0.20	.X.*± 0.5°	CHECK	FILE NO.	DWG NO. FPHSI-2XX01B031
.XXX±0.10	.XX.*± 0.25°	DRAW	SIZE A4	PROJ.  SHEET 1 / 1
			SCALE 4:1	REV A

F

E

D

C

B

A