
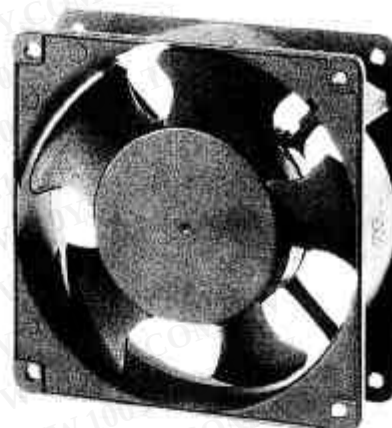
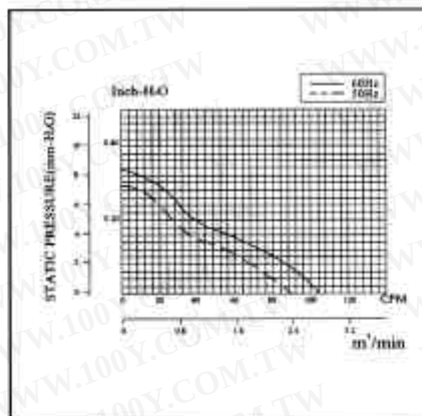


120×120×38mm



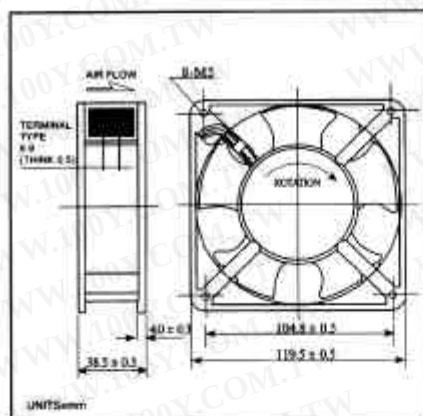


Model	BEARING System	Rated Voltage (V)	Freg (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise Level (dB-A)	Weight (g)
T15	Sleeve Ball	110/120	50/60	0.24/0.27	19/23	2700/3100	84/100	0.28/0.34	45/51	520
T30	Sleeve Ball	220/240	50/60	0.12/0.14	20/24	2700/3100	84/100	0.28/0.34	45/51	520

Specifications subject to change without notice.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

172×150×51 mm

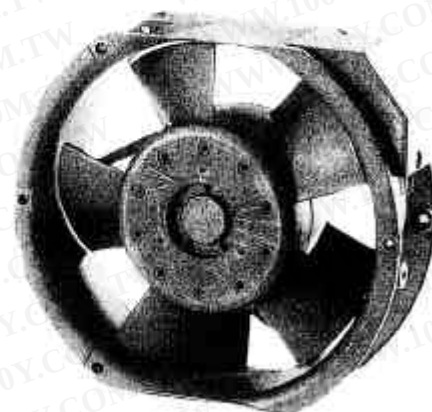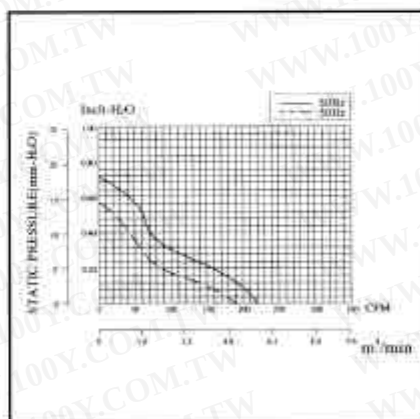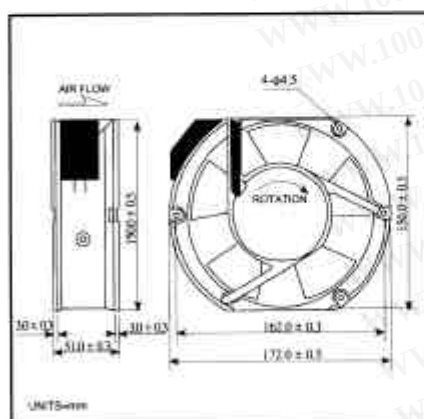

Model	BEARING System	Rated Voltage (V)	Freg (Hz)	Current (A)	Input Power (W)	Speed (rpm)	Air Flow (CFM)	Static Pressure (Inch-H ₂ O)	Noise Level (dB-A)	Weight (g)
FP108	Ball	110/120	50/60	0.48/0.55	45/52	2800/3100	190/220	0.55/0.72	53/59	920
FP108	Ball	220/240	50/60	0.28/0.35	44/51	2800/3100	190/220	0.55/0.72	53/59	920

Specifications subject to change without notice.