

DC Brushless Fan Dimension 60 x 60 x 20 mm

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




Features:


- Frame: Plastic Material UL 94V-0
- Blade: Plastic Material UL 94V-0
- Dielectric Strength: 50/60 Hz, 500 VAC, 1 minute (between lead conductor and frame)
- Insulation Resistance: 50M ohm min. at 500 VDC (between lead wire(+) and frame)
- Operating Temperature: -10°C to +70°C

Also available in 24 Voltage, 3pin/4pin connector

Fan Dimension

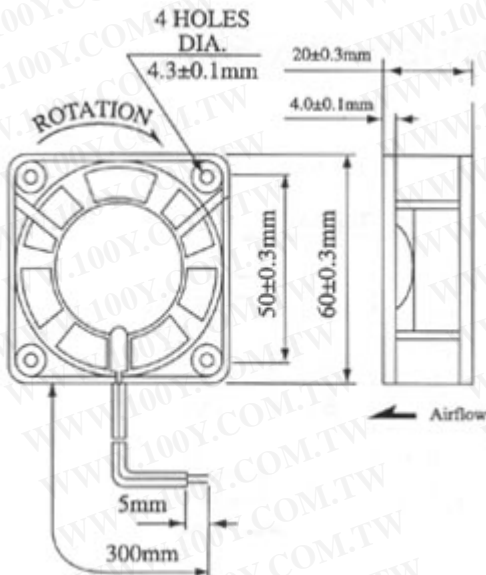

Fan Performance Curve

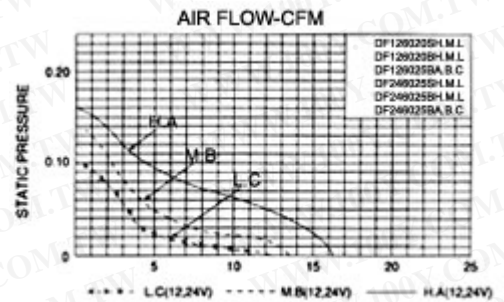

Specifications

Model	Bearing System	Rated Voltage	Input Current	Input Power	Speed	Air Flow	Static Pressure	Noise Level	Weight
		V	A	W	RPM	CFM	Inch-H2O	dBA	gm
DF126020BC	Ball	12	0.11	1.32	3500	17.5	0.12	24.6	51
DF126020BL	Ball	12	0.11	1.32	3500	17.5	0.12	24.6	51
DF126020SL	Sleeve	12	0.11	1.32	3500	17.5	0.12	24.6	51
DF126020BB	2xBall	12	0.15	1.8	4200	19.5	0.15	26.5	51
DF126020BM	Ball	12	0.15	1.8	4200	19.5	0.15	26.5	51
DF126020SM	Sleeve	12	0.15	1.8	4200	19.5	0.15	26.5	51
DF126020BA	2xBall	12	0.21	2.52	4800	21.3	0.17	28.7	51
DF126020BH	Ball	12	0.21	2.52	4800	21.3	0.17	28.7	51
DF126020SH	Sleeve	12	0.21	2.52	4800	21.3	0.17	28.7	