



MEAN WELL

SWITCHING POWER SUPPLY

ISO-9001 CERTIFIED MANUFACTURER


DKE10A SERIES

- 2:1 WIDE INPUT RANGE
- 4:1 INPUT IS AVIALABLE
- REGULATED DC OUTPUT
- .1K VDC I/P ISOLATION
- 1K-3KVDC ISOLATION (OPTIONAL)
- .LOW PROFILE / SMALL SIZE
- EPOXY ENCAPSULATED
- SIX-SIDED SHIELD OF METAL CASE
- .HIGH PERMAECE / LOW COST
- .SHORT CIRCUIT PROTECTION
- .OVER CURRENT PROTECTION
- .FREE AIR CONVECTION
- .100% BURN-IN TEST
- .1 YEAR WARRANTY



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MODEL	DKE10A-05	DKE10A-12	DKE10A-15	DKE10A-24
SPECIFICATION				
DC OUTPUT VOLTAGE	±5V	±12V	±15V	±24V
OUTPUT VOLTAGE ACCURACY	±2%			
OUTPUT RATED CURRENT	±1000mA	±420mA	±333mA	±210mA
OUTPUT CURRENT RANGE	100±1000mA	42±420mA	33.3±333mA	21±210mA
RIPPLE & NOISE	50mVp-p	60mVp-p	60mVp-p	80mVp-p
LINE REGULATION	±0.3%	±0.3%	±0.3%	±0.3%
LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
DC OUTPUT POWER	10W	10W	10W	10W
EFFICIENCY	78%	80%	82%	82%
SWITCHING FREQUENCY	250KHz (TYPICAL)			
INPUT VOLTAGE RANGE	9-18VDC			
INPUT CURRENT	1.1A/12VDC; 30mA @ NO LOAD (TYPICAL)			
SHORT CIRCUIT PROTECTION	CONTINUOUS			
OVER CURRENT PROTECTION	160-250% AUTO RECOVERY			
TEMP. COEFFICIENT	±0.03% / °C (0-50°C)			
ISOLATION VOLTAGE	I/P-O/P:1K VDC MIN.			
ISOLATION RESISTANCE	I/P-O/P:100M Ohms MIN. @500VDC			
TRANSIENT RESPONSE	<250u sec. FOR 25% LOAD STEP CHANGE			
WORKING TEMP., HUMIDITY	-15°C~+60°C, 20%-90% RH (NO DERATING); 80% LOAD @ 71°C			
STORAGE TEMP., HUMIDITY	-25°C~+85°C, 10%-95% RH			
DIMENSION	2"×1"×0.44"			
WEIGHT	32g			
CASE METERIAL	SIX-SIDED SHIELD OF METAL CASE			

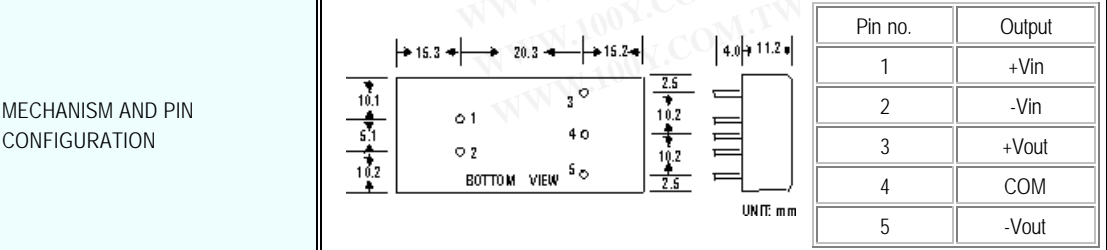

NOTE :

1. ALL PARAMETERS ARE SPECIFIED AT RATED INPUT, RATED LOAD, 25°C 70% RH. AMBIENT.
2. RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
3. LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
4. LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD.

2002-07-04