


Micro Fuses

DM Fuse

Normal blow



- Physical Size · Net Weight
8 × 6 × 8.5mm 0.4g
- Color
Transparent body type
- Package
50Pcs/Stick
- Applicable Fuseholders
DMH
DM2H

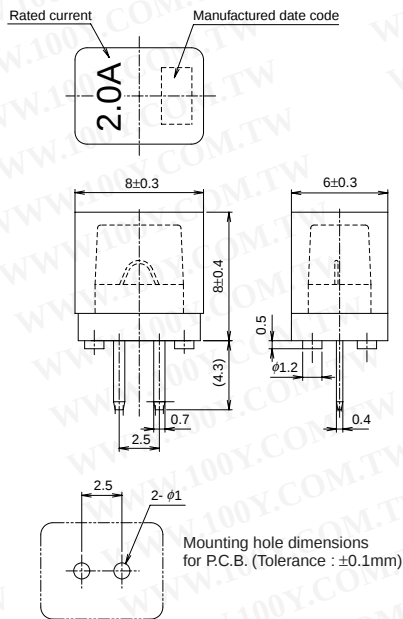

Cat. No.	Rated Current	Breaking Capacity	Typ. Resistance*1
DM03	0.3A	AC/DC 125V 50A	0.70Ω
DM05	0.5A		0.34Ω
DM10	1A		0.135Ω
DM16	1.6A		75mΩ
DM20	2A		55mΩ
DM32	3.2A		30mΩ

*1 : at 10% max. of rated current

Carrying Capacity	Clearing Time
100%	150% within 10 minutes 200% within 5 seconds

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Clearing Characteristics

I²t-t Characteristics

