



CR1616 *Brief Datasheet*


Lithium Manganese Dioxide Coin Batteries

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 BASIC SPECIFICATION

Nominal Voltage(V)	3.0
Nominal Capacity(mAh)	50
Continuous discharge with 15k Ω to 2.0V cut-off, +23°C	
Continuous standard load (k Ω)	15
Operating temperature (°C)	-20~ +60
Weight (g)	1.2



Note: Typical values relative to cells stored for three months at 23°C.

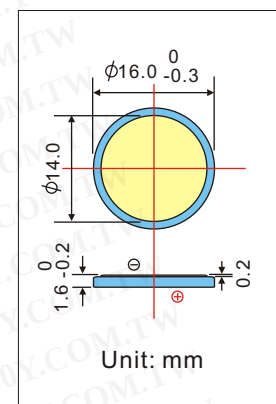

2 MAIN FEATURES

- ◆ Light Weight, High Voltage and High Energy Density.
- ◆ Excellent Stable Discharge Characteristics and outstanding Temperature Characteristics.
- ◆ Excellent Leakage Resistance and Excellent Long-term Reliability.




3 ELECTRICAL CHARACTERISTICS

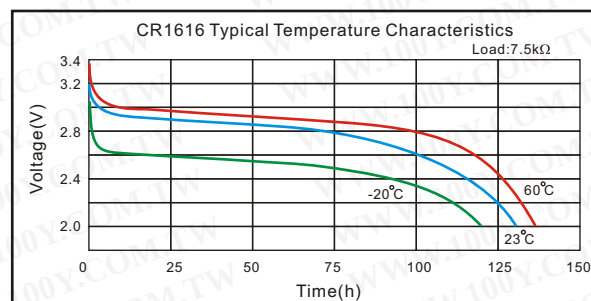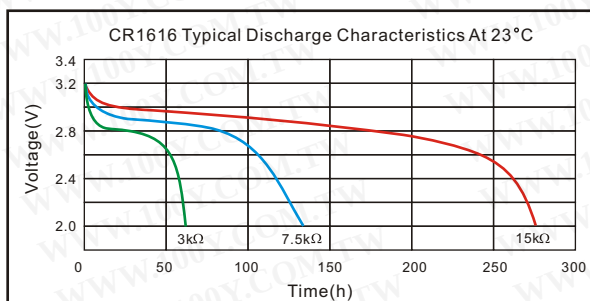




4 WARNING!

- ◆ Do not recharge, short-circuit, disassemble, deform, heat or place the battery near a direct flame. Any of the above actions could cause it to ignite explode or become damaged.
- ◆ Keep this battery out of the reach of children.
- ◆ When storing the battery or throwing it away, be sure to cover it with tape.




-VAY3






-VBY2

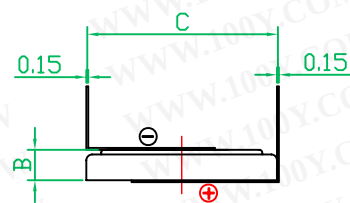




-VCY2

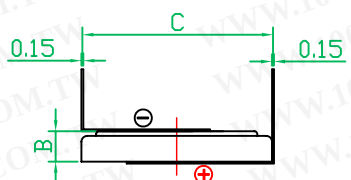




-VDY2

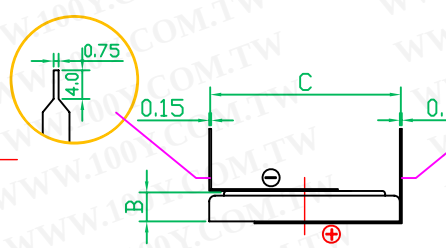


-VEY3

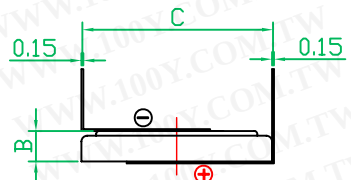


-VFY2

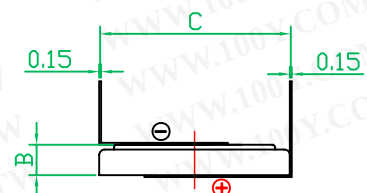


-PAN3

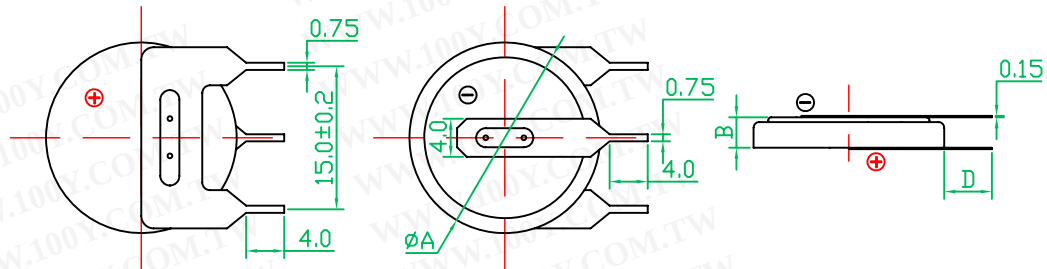


-PBN2

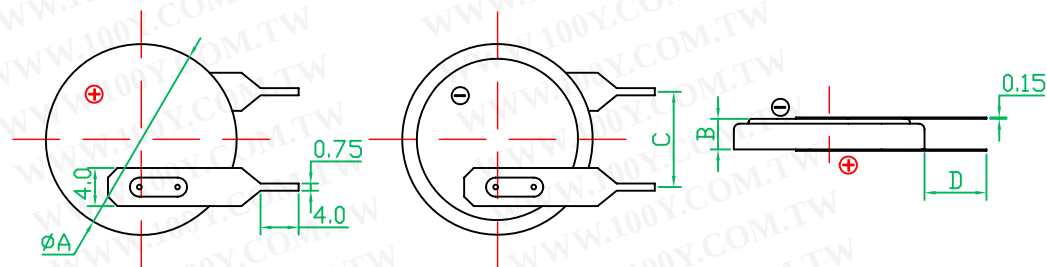


-PCN2

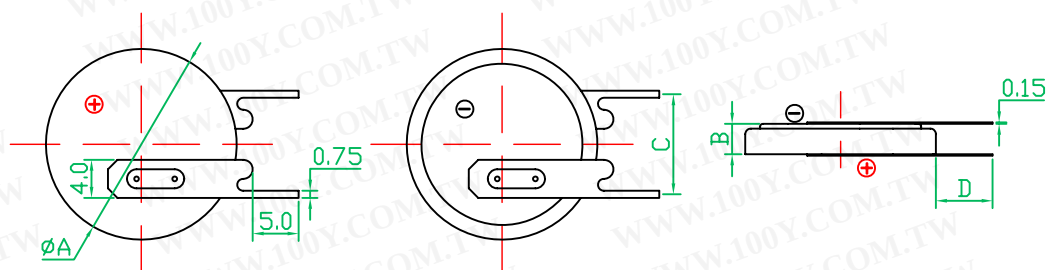


-PDY2

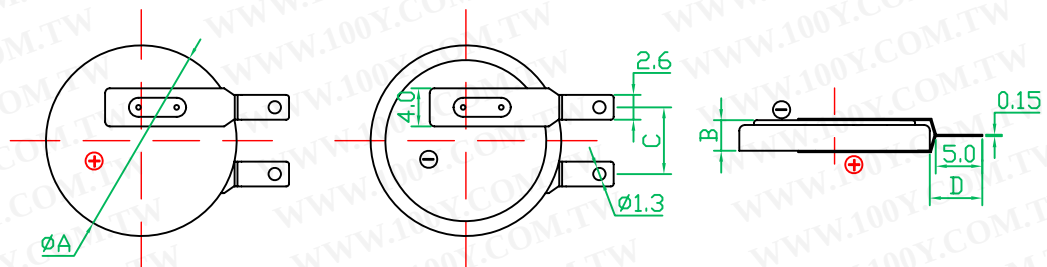


-PEN3

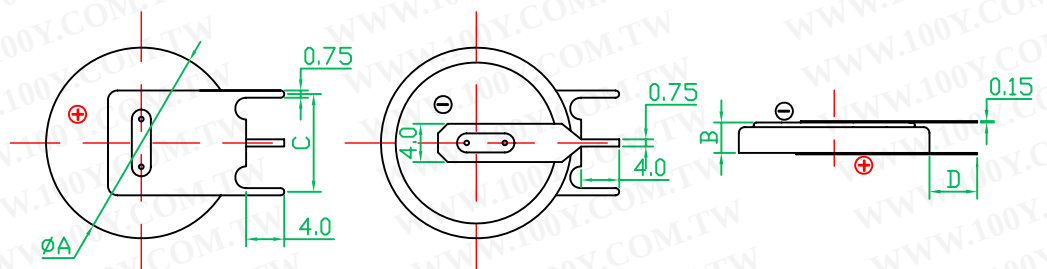


-PFN2

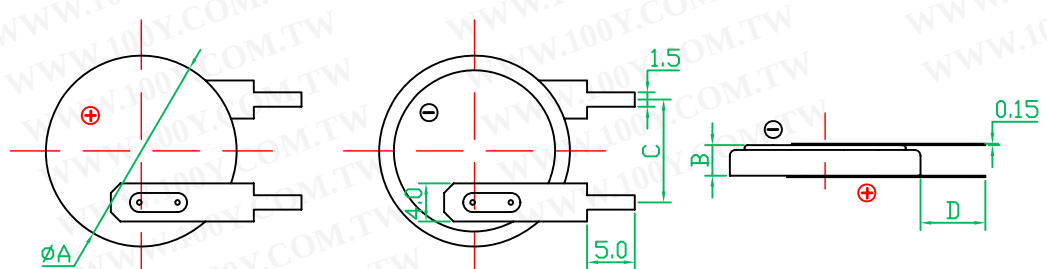


-PGY2

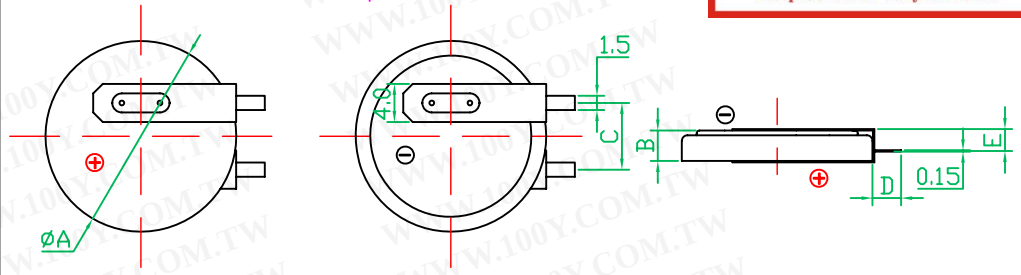


-PHY2

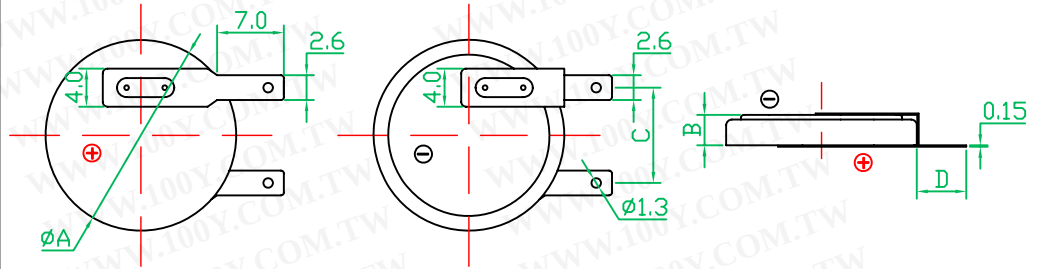


-PIY2

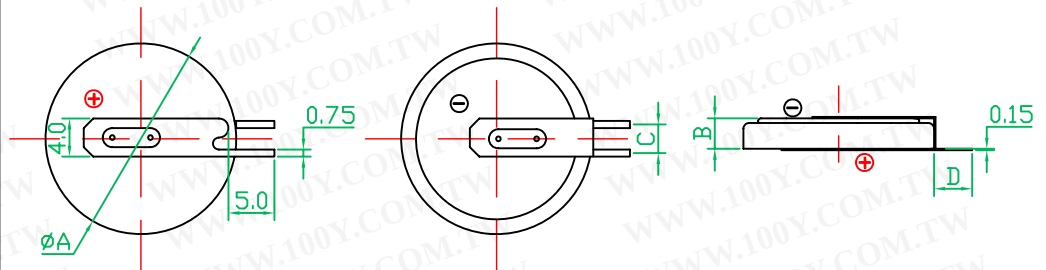


-PJY2

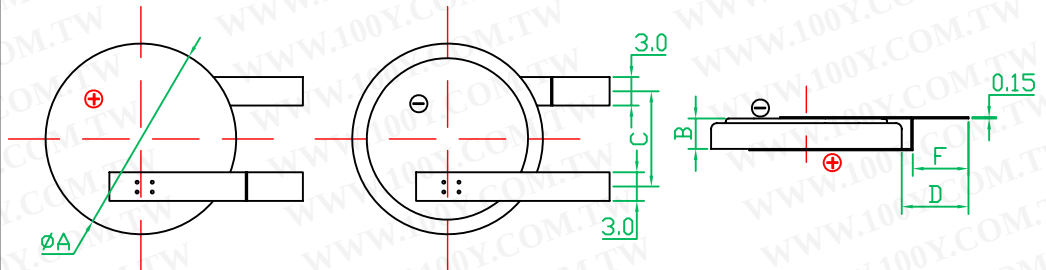

-PKY2

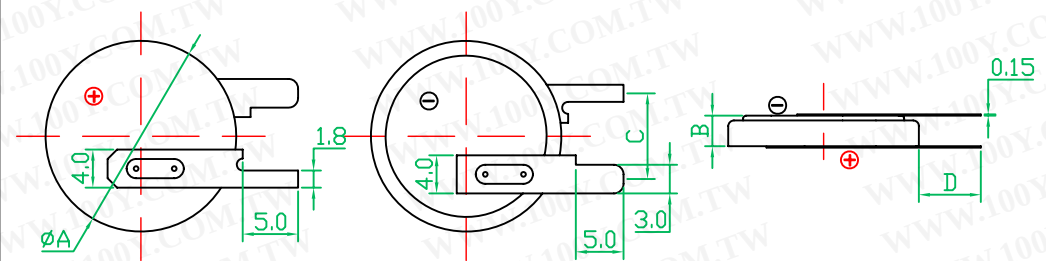



-SAN2

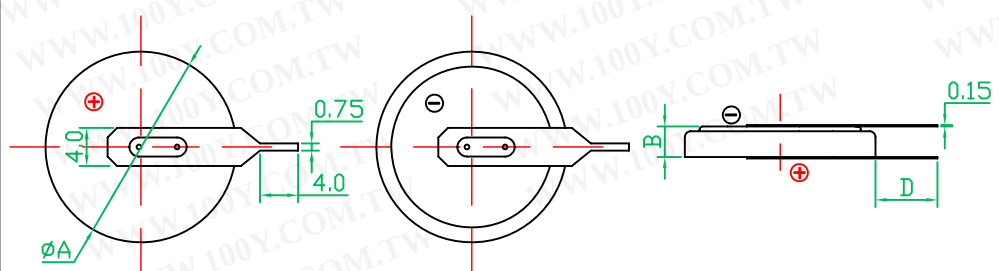



[Http://www.100y.com.tw](http://www.100y.com.tw)

F



-LDY2

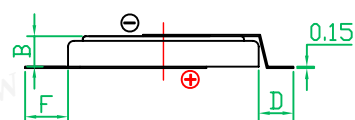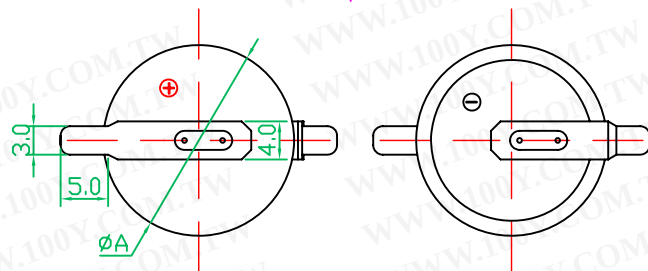



-LEY2

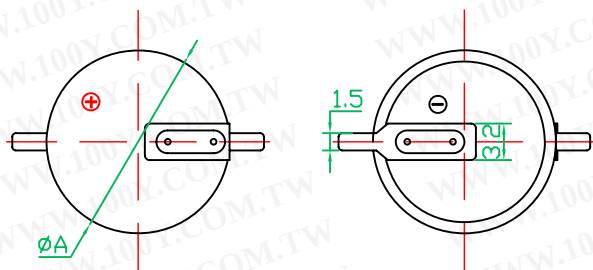



-LFY2

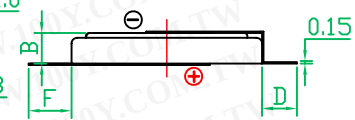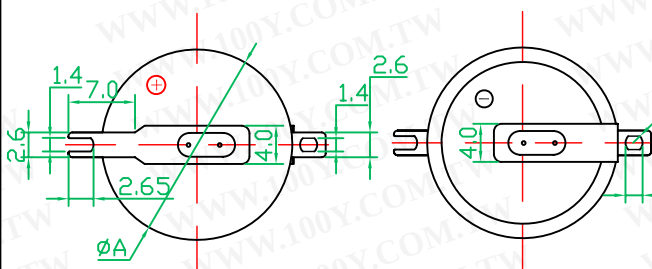



-LGY2

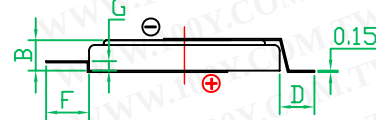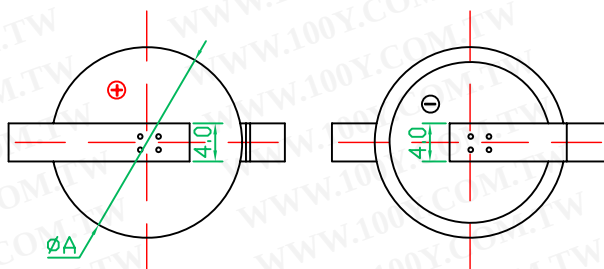


-AAY2

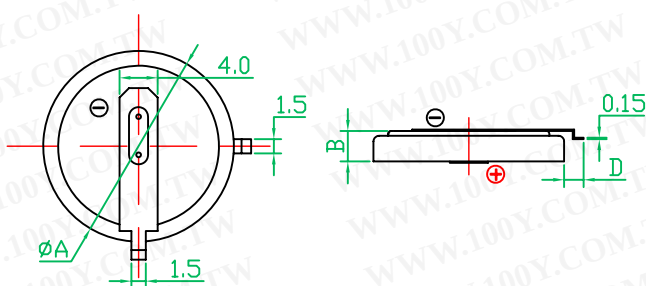


-ABY2

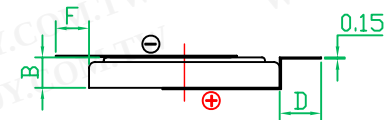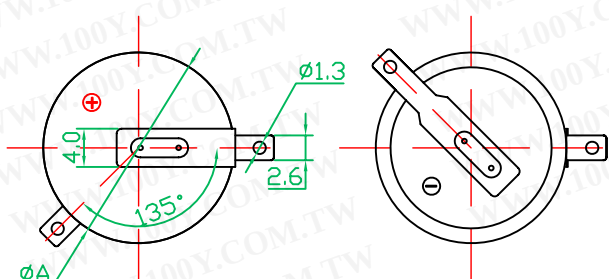


-ADY2

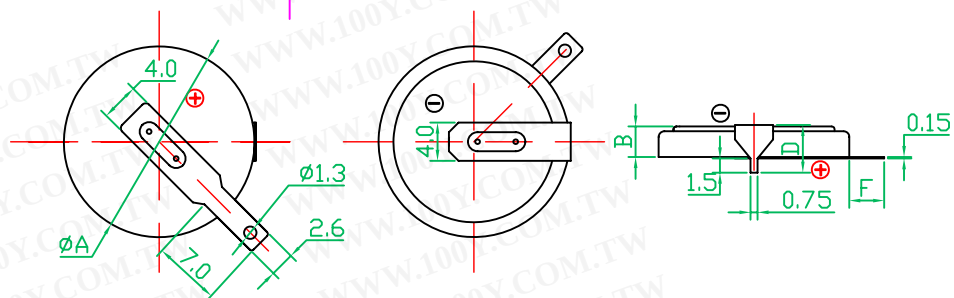

-AFY2

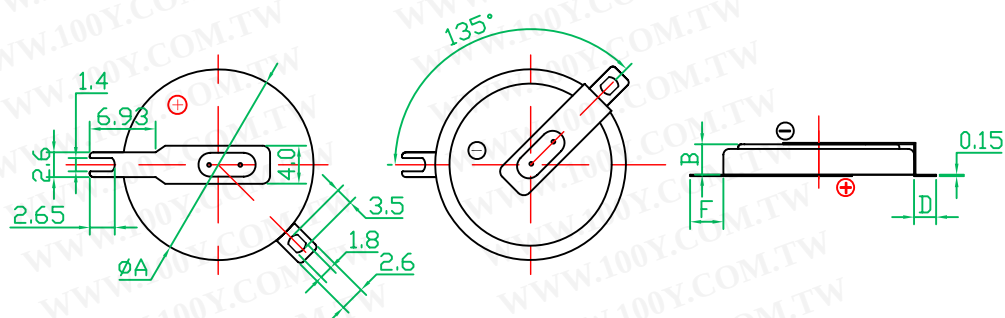

-LD

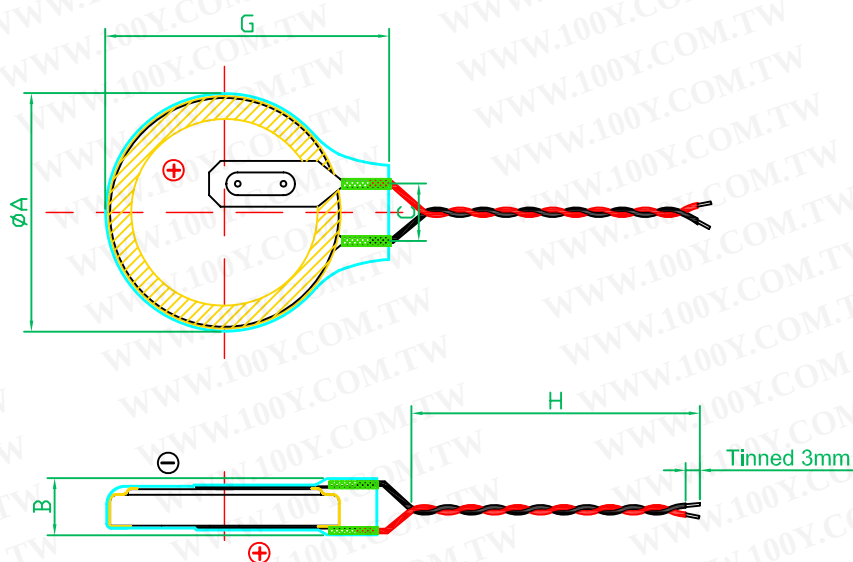

-LD/

