


REVISION RECORD			
REV	DESCRIPTION	DFTM	DATE
1	Initial Release	KP	7/12/93
2	Added Differential Impedance	KP	6/23/97

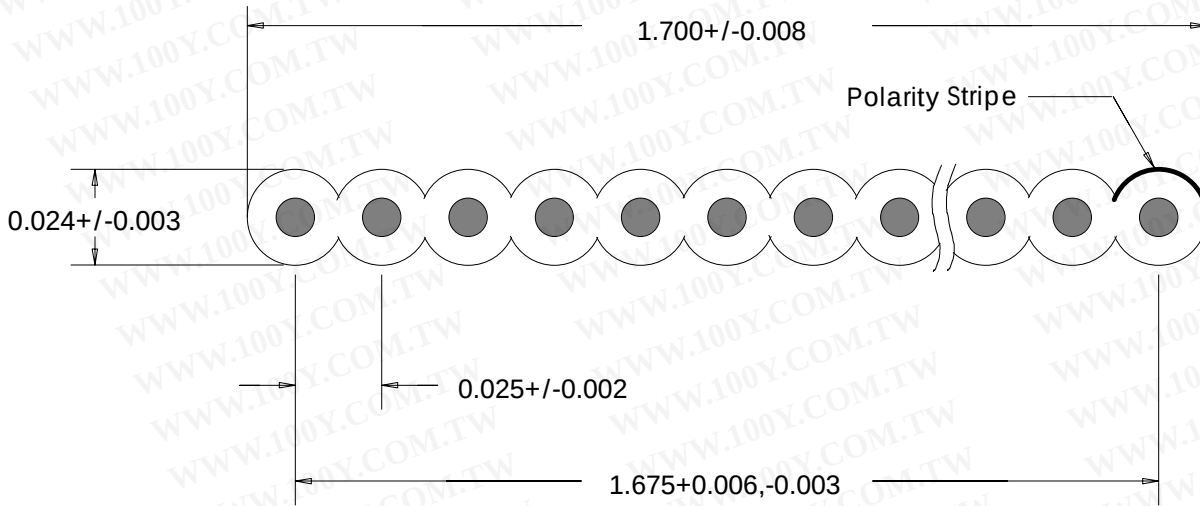

NOTES

Insulation: FEP, Natural, Blue Stripe

Conductor: 68 @ 30 AWG, Solid, Silver Plated Copper, 0.010" Diameter

Impedance: 90 ohms (Single End)
130 ohms (Differential)

Capacitance: 14.7 pF/ft (Single End)
10.0 pF/ft (Differential)

Inductance: 0.12 uH/ft (Single End)
0.17 uH/ft (Differential)

Propagation Delay: 1.25 ns/ft

Temperature Rating: -55C to 150C

Voltage Rating: 150 V

U.L. Style: 20726

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

		CAGE CODE: 0CGL7	
		PART No: F3001S-68-025-85	
		SHEET 1 OF 1	REV: 2
DFTM: KP	DATE: 6/23/97	TITLE: Internal SCSI Ultra, Ultra2 (LVD), Ultra3 SCSI Compliant	
APPD: RP	DATE: 6/23/97		