

Polypropylene (PP) Film and Foil Capacitors for Pulse Applications in PCM 5 mm

Special Features

- Pulse duty construction
- Close tolerances up to $\pm 2.5\%$ ($\pm 1\%$ on request)
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2002/95/EC

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- LC-Filtering
- Oscillating circuits
- Audio equipment

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Metal foil

Internal construction:

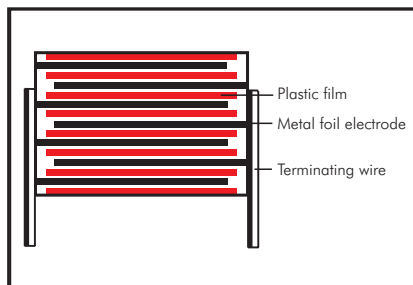

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Yellow

Electrical Data

Capacitance range:

33 pF to 0.033 μ F (E12-values on request)

Rated voltages:

63 VDC, 100 VDC, 250 VDC, 400 VDC,
630 VDC, 800 VDC, 1000 VDC

Capacitance tolerances:

$\pm 10\%$, $\pm 5\%$, $\pm 2.5\%$ ($\pm 1\%$ available subject to special enquiry)

Operating temperature range:

-55°C to $+100^\circ\text{C}$

Test specifications:

In accordance with IEC 60384-13 and EN 131 800

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at $+20^\circ\text{C}$:

$\geq 5 \times 10^5\text{ M}\Omega$

(mean value: $1 \times 10^6\text{ M}\Omega$)

Measuring voltage:

$U_r = 63\text{ V}$: $U_{\text{test}} = 50\text{ V/1 min.}$

$U_r \geq 100\text{ V}$: $U_{\text{test}} = 100\text{ V/1 min.}$

Dissipation factors at $+20^\circ\text{C}$: $\tan \delta$

at f	$C \leq 1000\text{ pF}$	$1000\text{ pF} < C \leq 4700\text{ pF}$	$C > 4700\text{ pF}$
1 kHz	$\leq 3 \times 10^{-4}$	$\leq 4 \times 10^{-4}$	$\leq 4 \times 10^{-4}$
10 kHz	$\leq 3 \times 10^{-4}$	$\leq 4 \times 10^{-4}$	$\leq 4 \times 10^{-4}$
100 kHz	$\leq 4 \times 10^{-4}$	$\leq 5 \times 10^{-4}$	–
1 MHz	$\leq 10 \times 10^{-4}$	–	–

Mechanical Tests

Pull test on leads:

10 N in direction of leads according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec² in accordance with IEC 60068-2-29

Test voltage: $2 U_r$, 2 sec.

Maximum pulse rise time:

1000 V/ μ sec for pulses equal to the rated voltage

Dielectric absorption:

0.05%

Temperature coefficient:

$-200 \times 10^{-6}/^\circ\text{C}$ (typical)

Voltage derating:

A voltage derating factor of 1.35 % per K must be applied from $+85^\circ\text{C}$ for DC voltages and from $+75^\circ\text{C}$ for AC voltages

Reliability:

Operating life > 300 000 hours

Failure rate < 5 fit ($0.5 \times U_r$ and 40°C)

Packing

Available taped and reeled.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

General Data

Capacitance	63VDC/40VAC*				100VDC/63VAC*				250VDC/160VAC*				400VDC/220VAC*				630VDC/250VAC*			
	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**
33 pF	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5
47 "	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5
68 "	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5
100 pF	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
					2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5	2.5	6.5	7.2	5
150 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
220 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
330 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
470 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
680 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
1000 pF	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
1500 "	2.5	6.5	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5
2200 "	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	4.5	6	7.2	5	5.5	7	7.2	5
3300 "	4.5	6	7.2	5	5.5	7	7.2	5	5.5	7	7.2	5	5.5	7	7.2	5	6.5	8	7.2	5
4700 "	4.5	6	7.2	5	5.5	7	7.2	5	6.5	8	7.2	5	6.5	8	7.2	5	6.5	8	7.2	5
6800 "	4.5	6	7.2	5	5.5	7	7.2	5	6.5	8	7.2	5	7.2	8.5	7.2	5	7.2	8.5	7.2	5
0.01 µF	5.5	7	7.2	5	6.5	8	7.2	5	7.2	8.5	7.2	5	8.5	10	7.2	5	8.5	10	7.2	5
0.015 "	6.5	8	7.2	5	7.2	8.5	7.2	5	8.5	10	7.2	5								
0.022 "	7.2	8.5	7.2	5	8.5	10	7.2	5												
0.033 "	8.5	10	7.2	5																


*AC voltage: f ≤ 1000 Hz; 1.4 x Urms + UDC ≤ Ur

**PCM = Printed circuit module = lead spacing.


New values and box sizes.

E12-values and individual values available from 27 pF up on request.

Dims. in mm.



d = 0.5 Ø

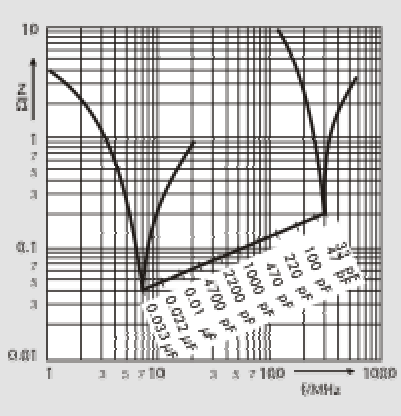

Impedance change with frequency (general guide).

Permissible AC voltage
in relation to frequency at
10°C internal temperature rise
(general guide)

