




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

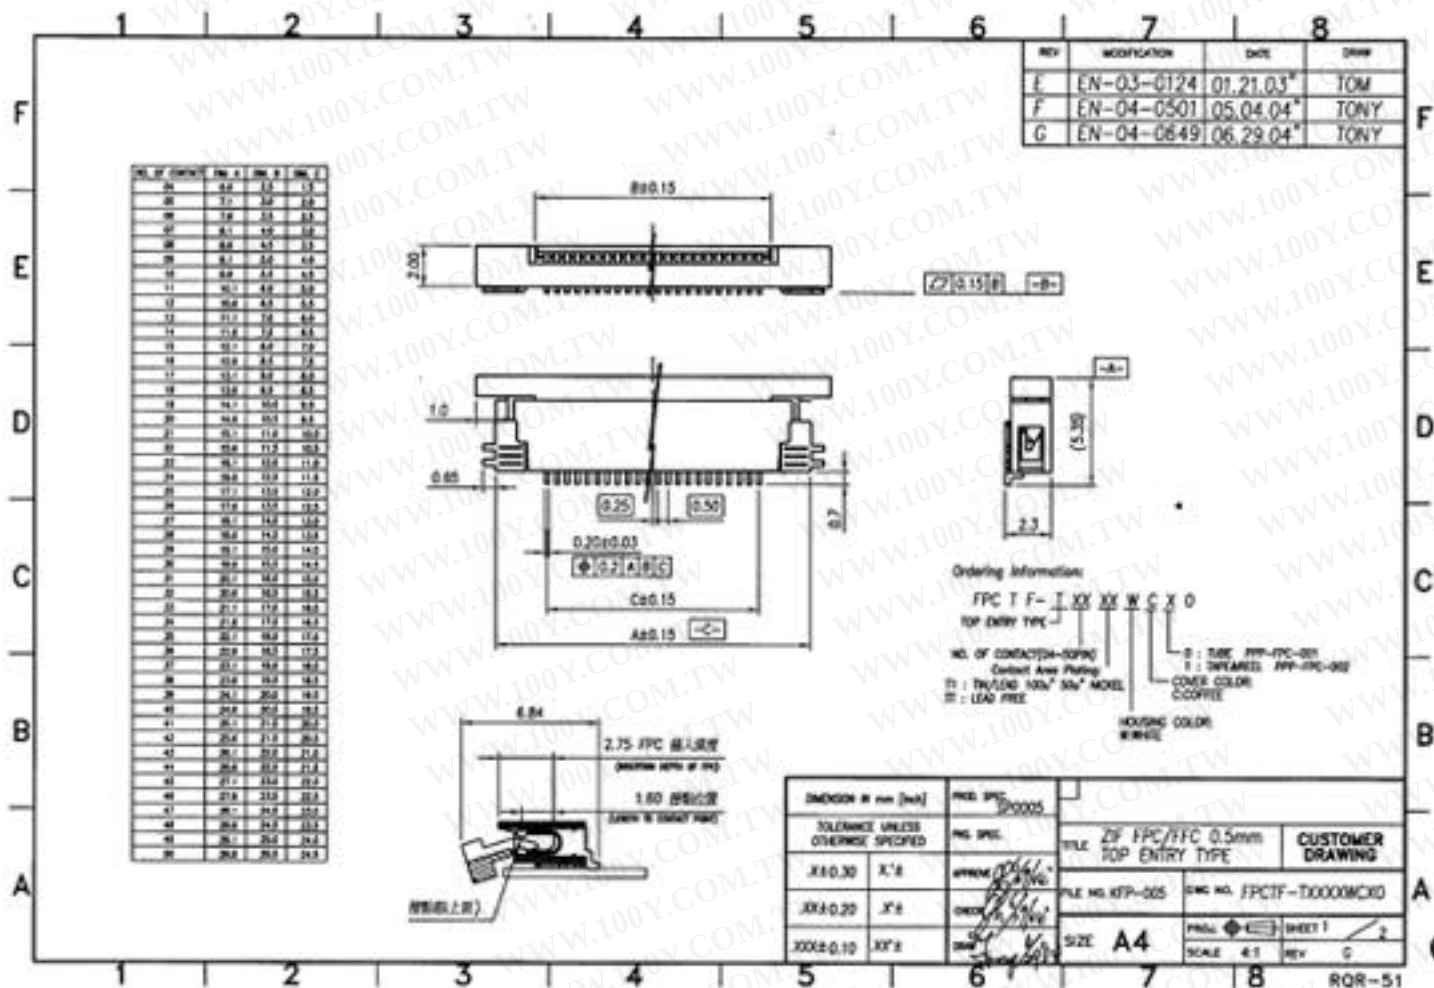

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

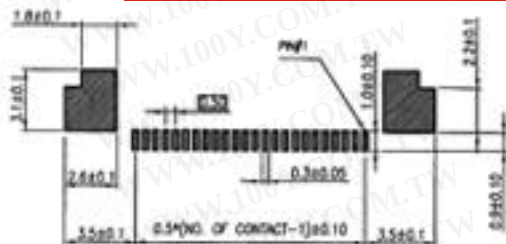

TOP ENTRY
PC BOARD LAYOUT

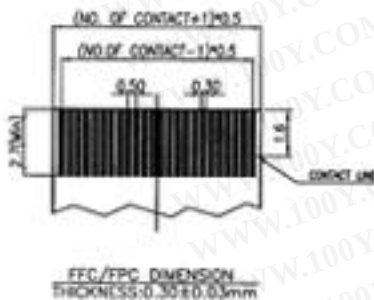

FPC/FPC DIMENSION
THICKNESS: 0.30±0.03mm

REV	MODIFICATION	DATE	DRW
E	EN-03-0124	01.21.03	TOM
F	EN-04-0501	05.04.04	TONY
G	EN-04-0649	06.29.04	TONY

Ordering Information:

FPC T F- XX XX M C X D
 TOP ENTRY TYPE
 NO. OF CONTACTS (24-5096)
 Contact Area Plating
 TI : TIN/LEAD 100% MIN NICKEL
 TT : LEAD FREE
 D : TUBE PFP-FPC-001
 T : DEFEATED PFP-FPC-002
 COVER COLOR
 COG/TEFL
 HOUSING COLOR
 WHITE

Specifications

Material & Finish

Housing Material: Nylon 6T UL94V-0 / COLOR: White
 Slider: PPS UL94V-0 / COLOR: Coffee
 Plating:
 Contacts: Copper alloy / Under plating: Nickel (50μ" Min.
 Over plating: Tin alloy (100μ" Min.
 Latch: Copper alloy / Under plating: Copper (50μ" Min.
 Over plating: Tin alloy (100μ" Min.
 Electrical Performance:

Rated current: 0.5A
 Rated voltage: 50 VDC
 Contact Resistance: 30Ω max. (at 20mDC, 100mA max.)
 Insulation Resistance: 100MΩ min. (at 500 VDC)
 Dielectric Withstanding Voltage: AC 250V / 60 sec.
 (Leak current must be 10μA max.)
 Operating Temperature: -32 to +85°

DIMENSION IN mm (inch)	PROD. SPEC.	TITLE		CUSTOMER DRAWING	
TOLERANCE UNLESS OTHERWISE SPECIFIED	PKG. SPEC.	ZIF FPC/FPC 0.5mm TOP ENTRY TYPE			
A±0.30	X/2	FILE NO. K7P-005	DRWG. NO.	FPCIF-10000WC10	
XX±0.20	X/2	SIZE	A4		
XXX±0.10	XX/2	SCALE	4:1		